

Installation Instructions



GRUPA  **BLACHOTRAPEZ**



















BLIZZARD





mis·tral

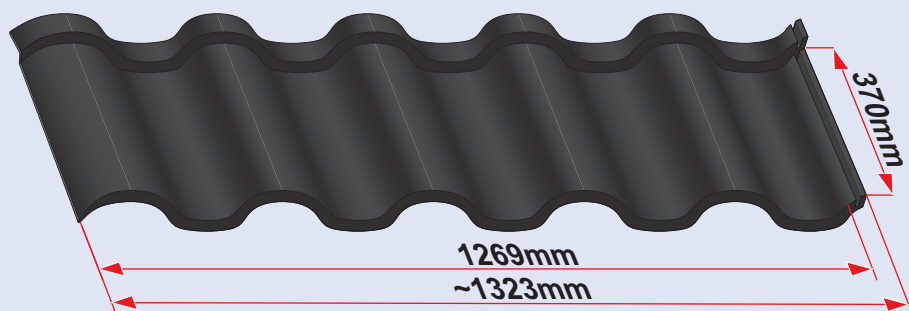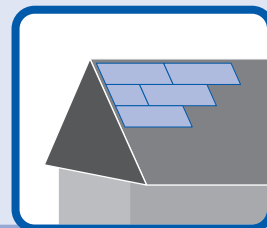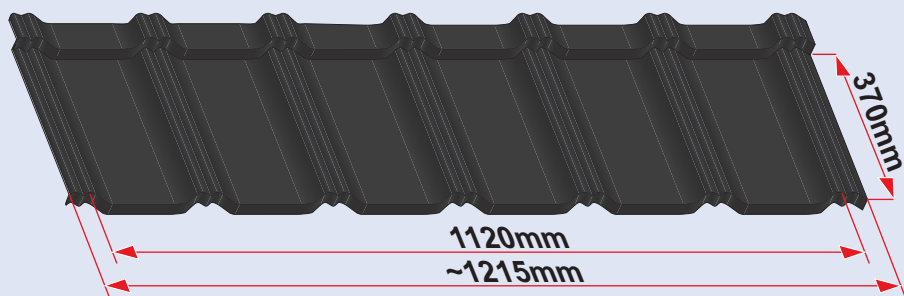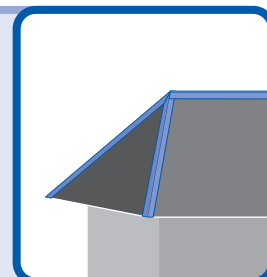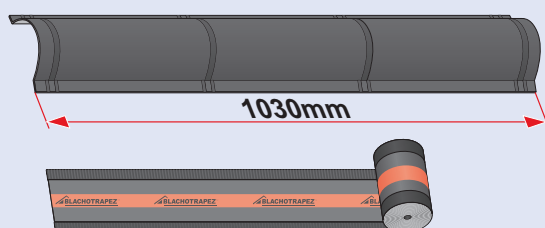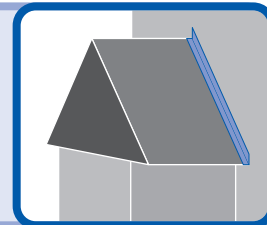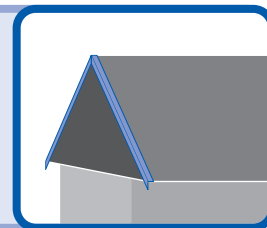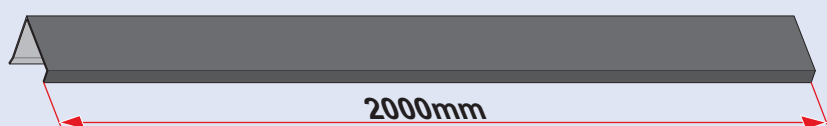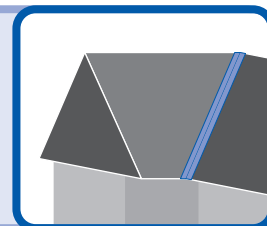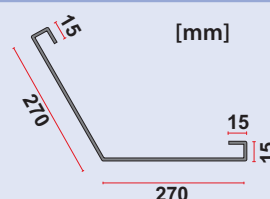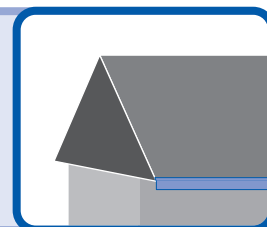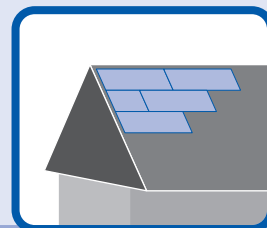





mis·tral


1







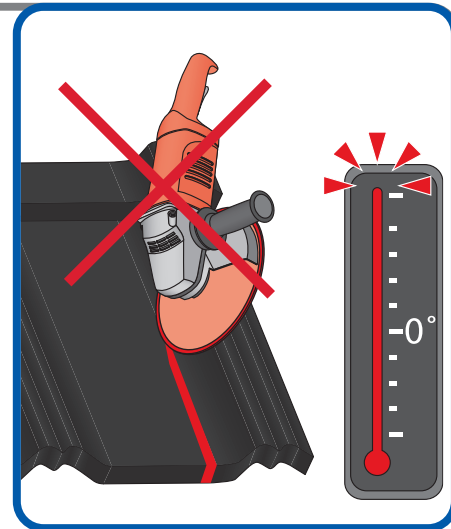
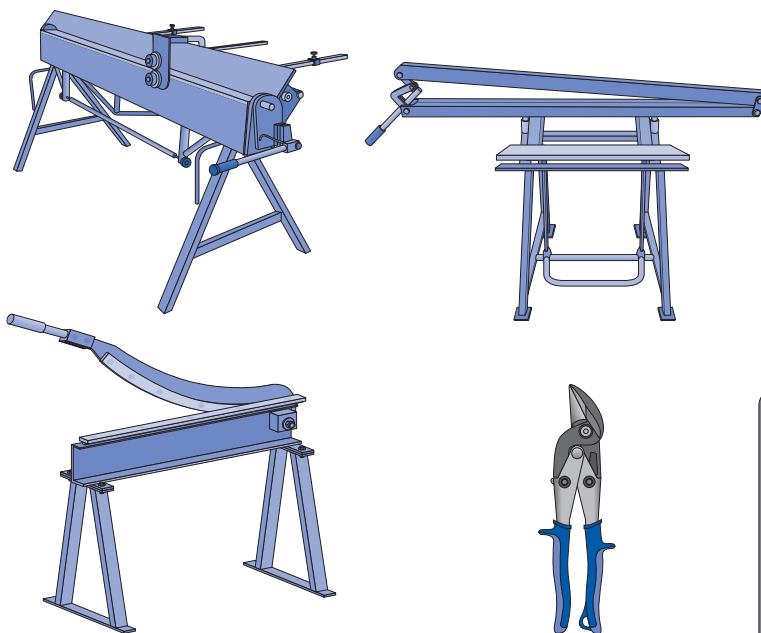


Installation at temperatures below 5°C is not recommended. Do not install, bend or walk on the sheets when they are damp. The panel coatings and accessories of BTR SYSTEMS are more likely to crack during work in low ambient temperatures. That is why all cutting and bending work should be performed using products stored in a dry and warm place.

2

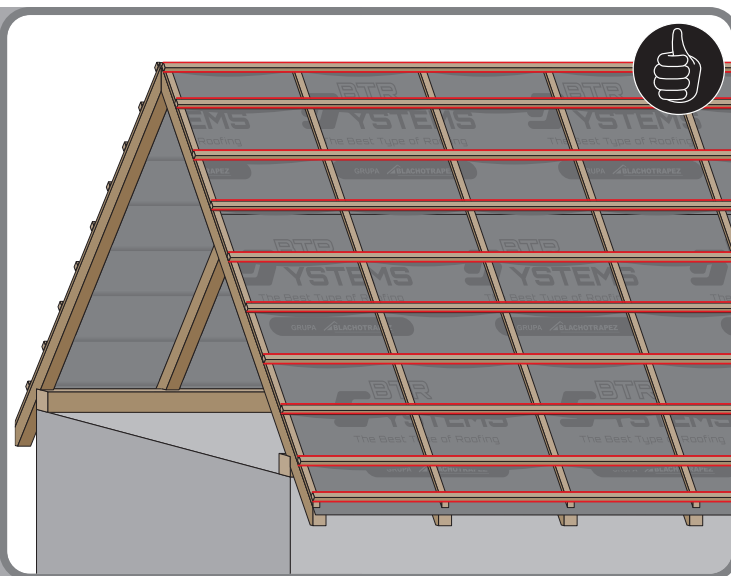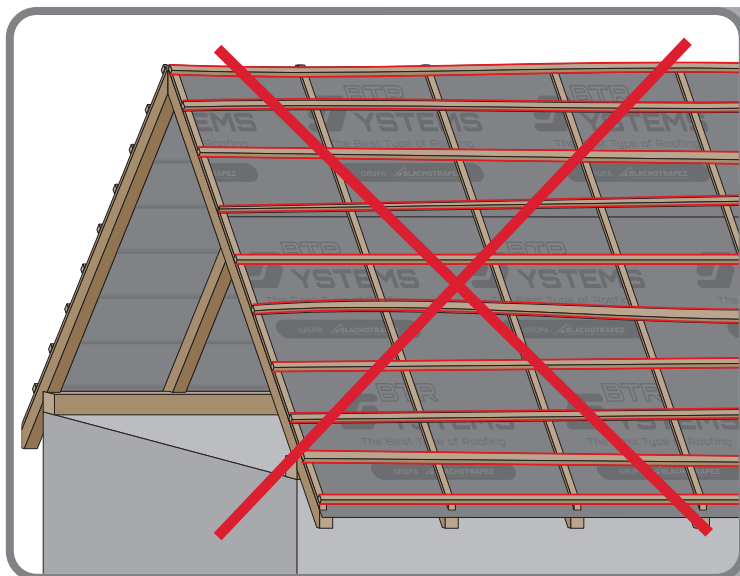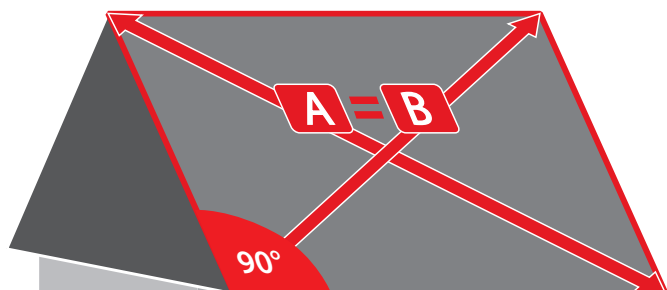






3

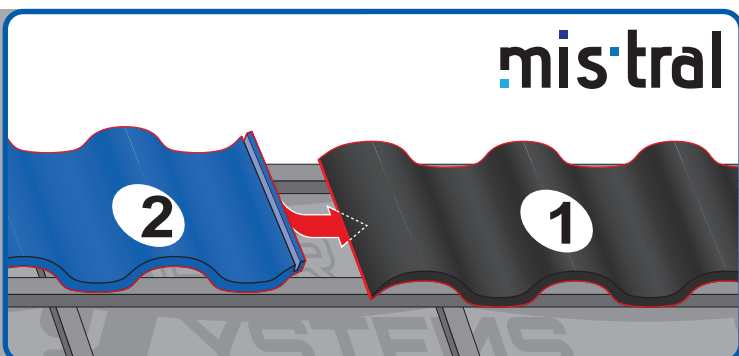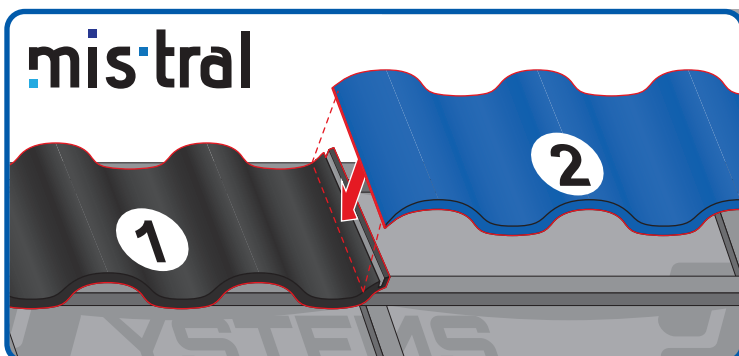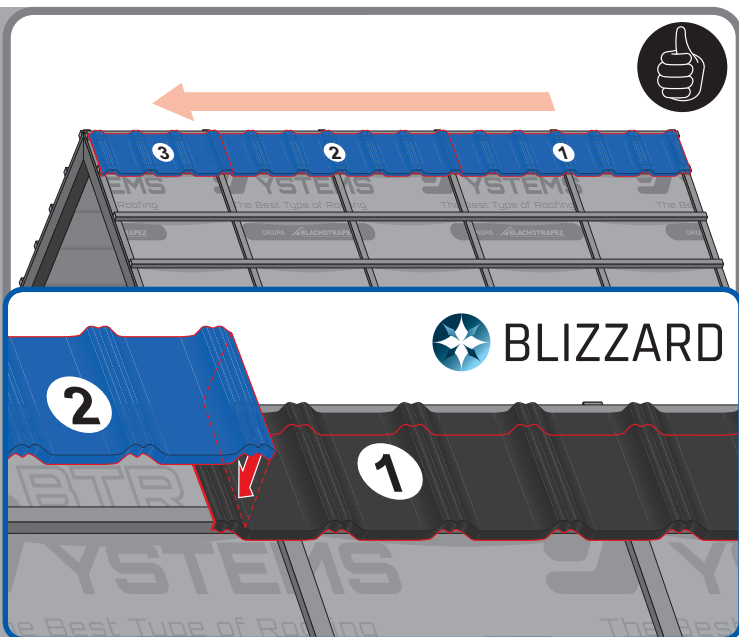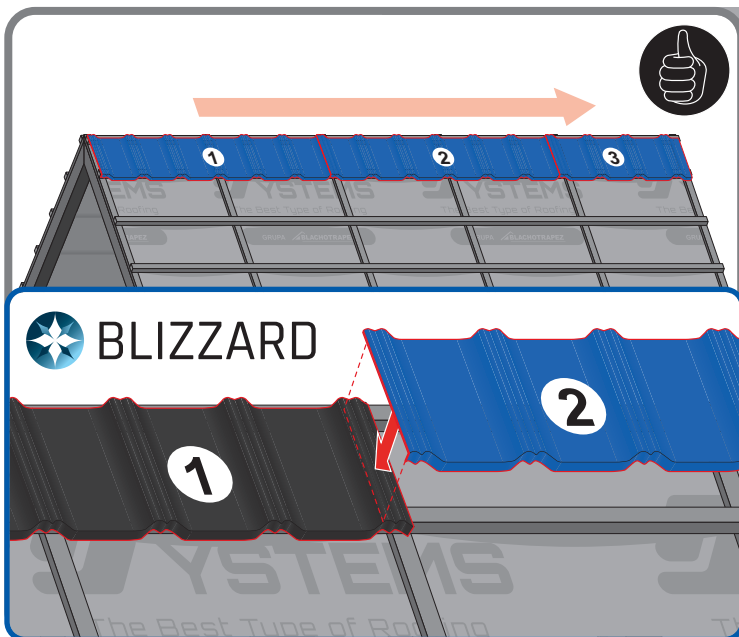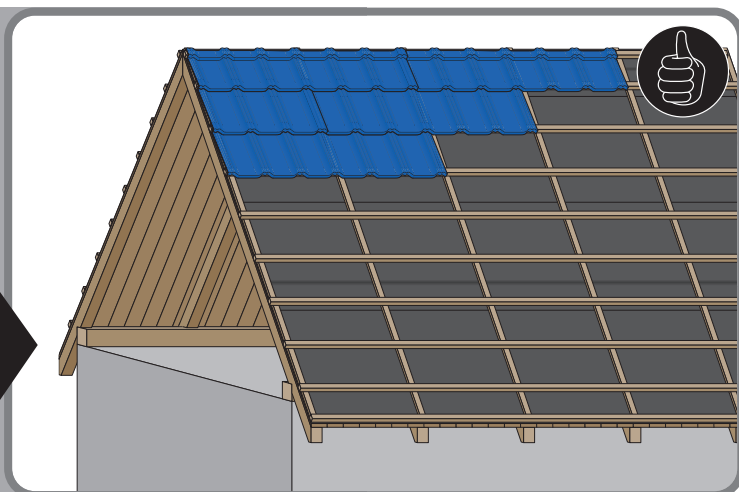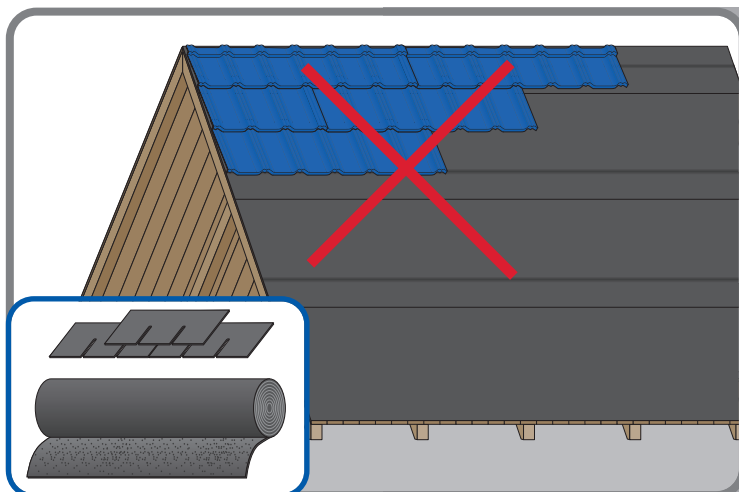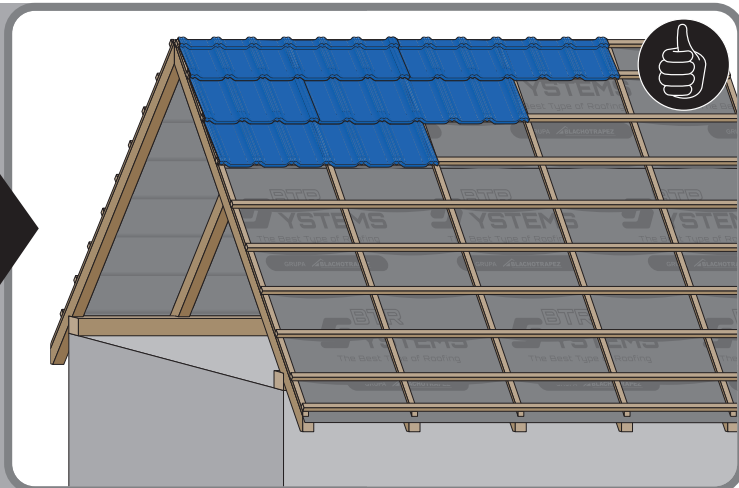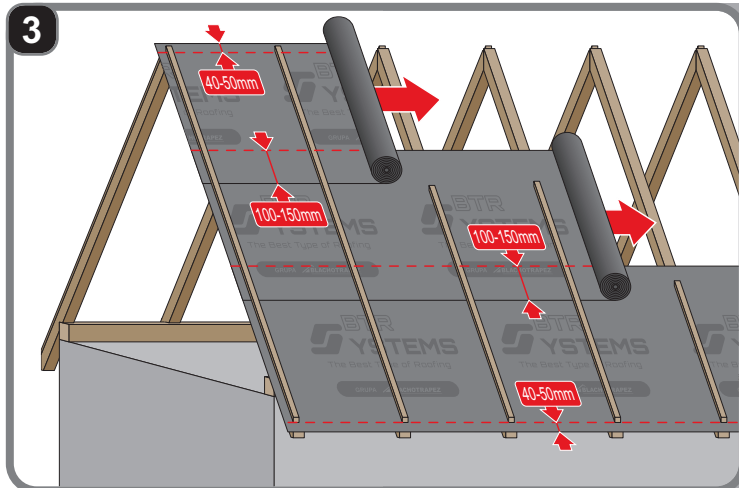











For the Mistral roofing, the recommended screw length is 55 mm

- 4 Due to product specifications and the nature of the material, the spacing of battens may vary (mistral 367mm, blizzard 370mm) due to differences in stone grammage – a factor beyond the manufacturer's control.




$x = 365 - 370 \text{ mm}$

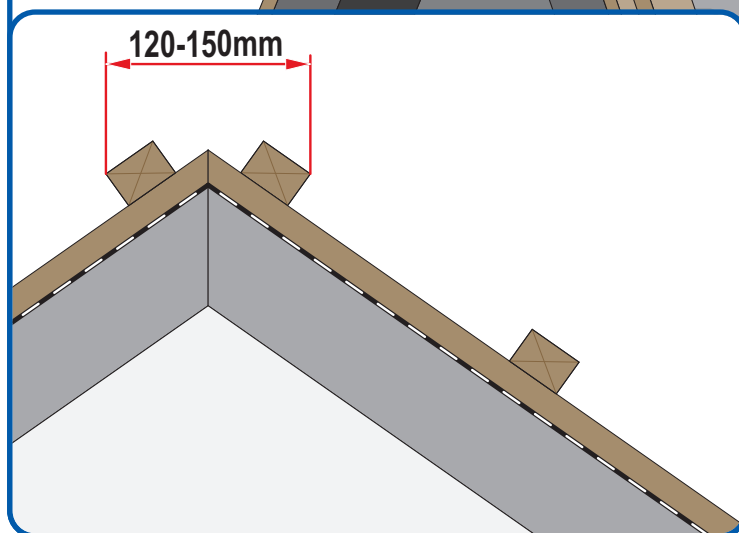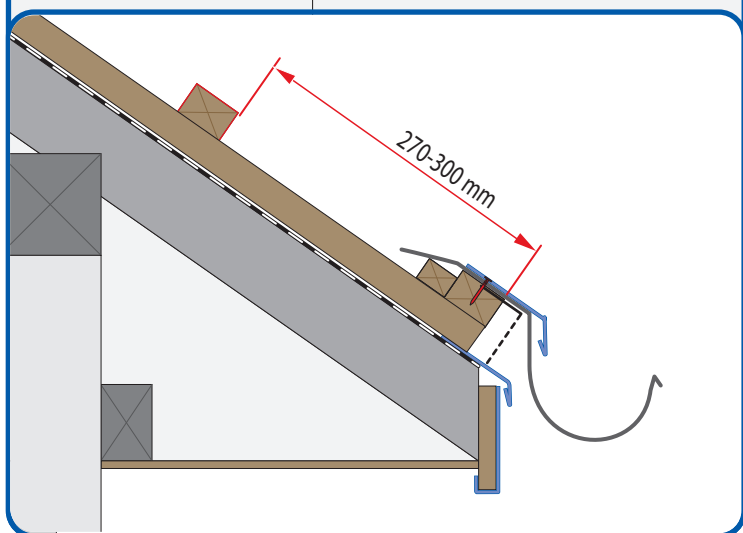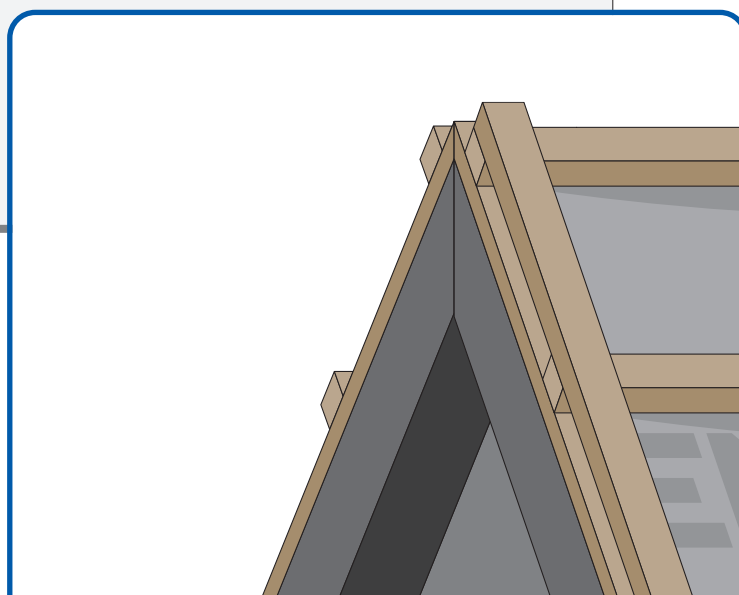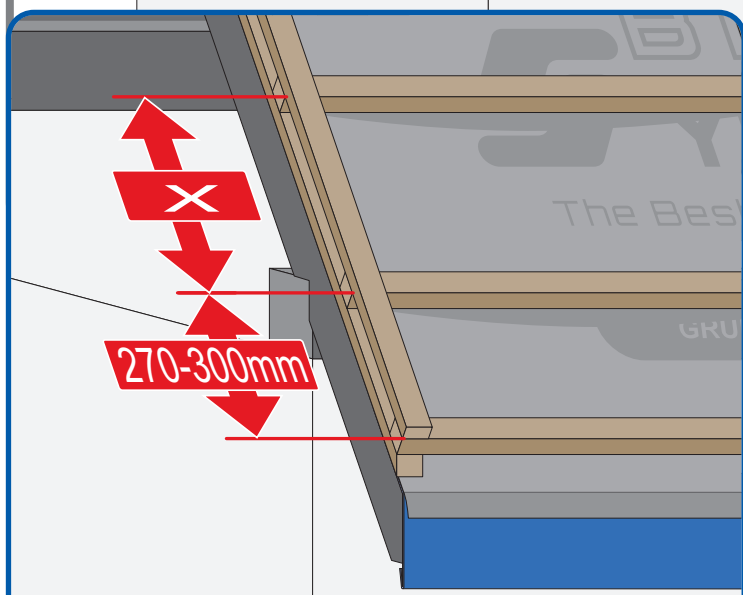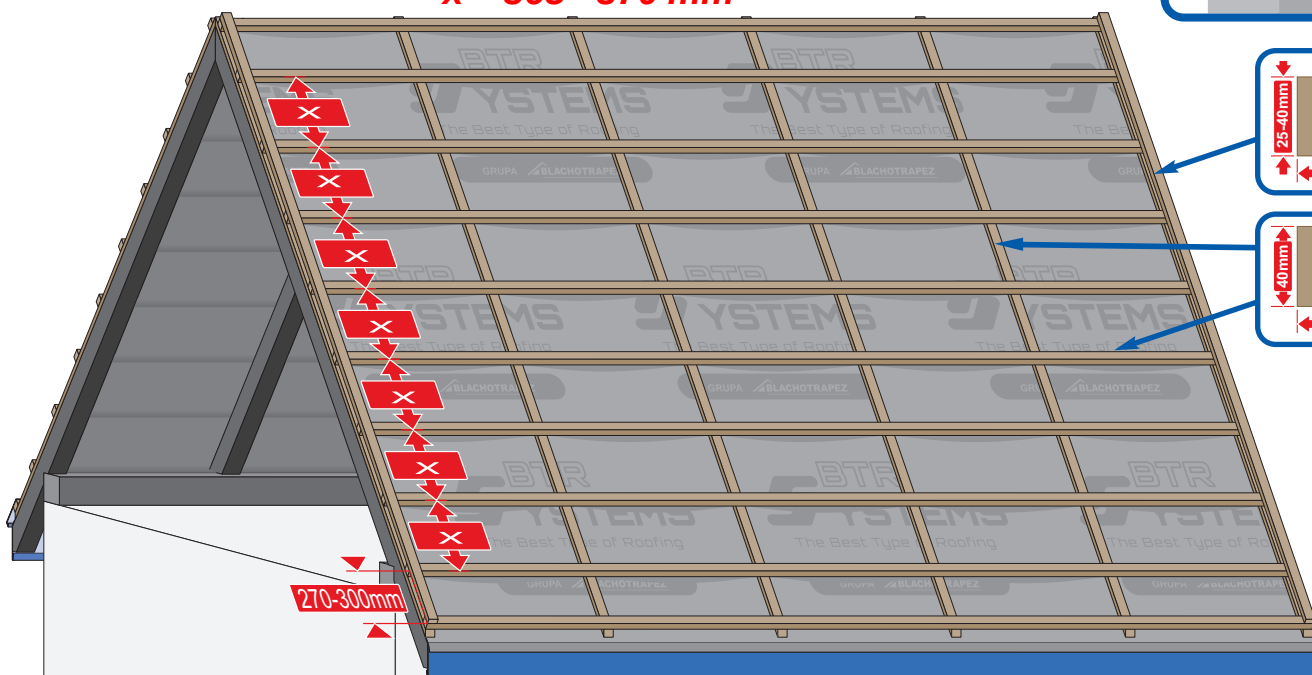


5a

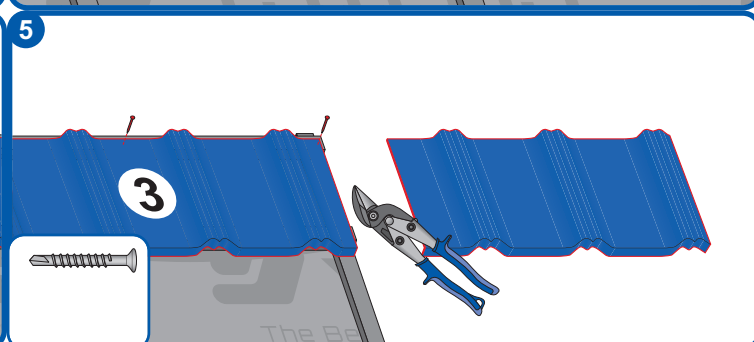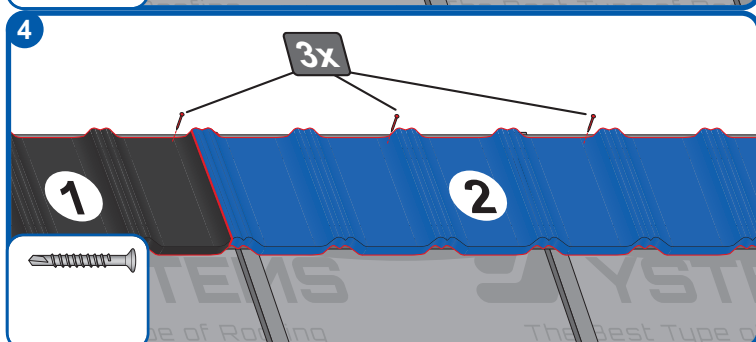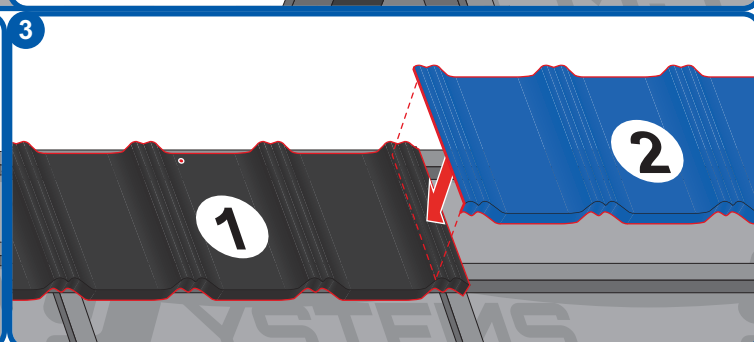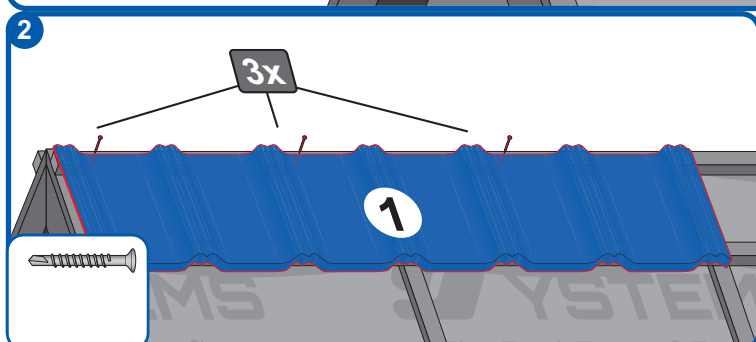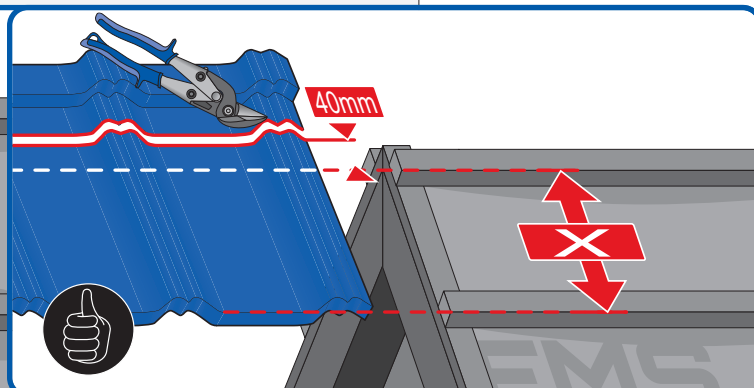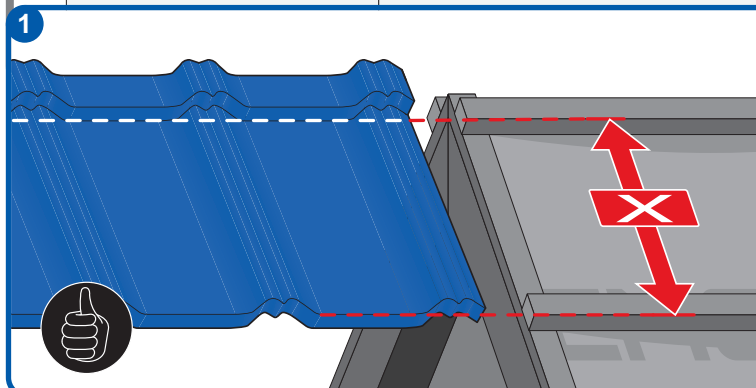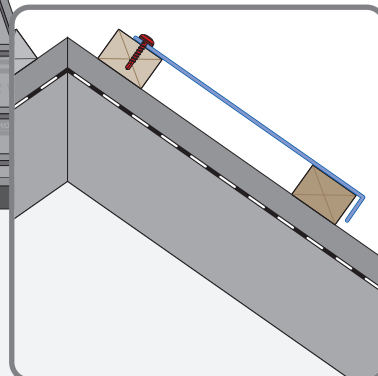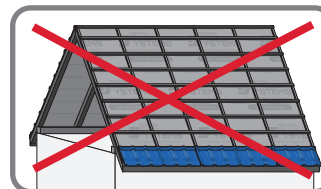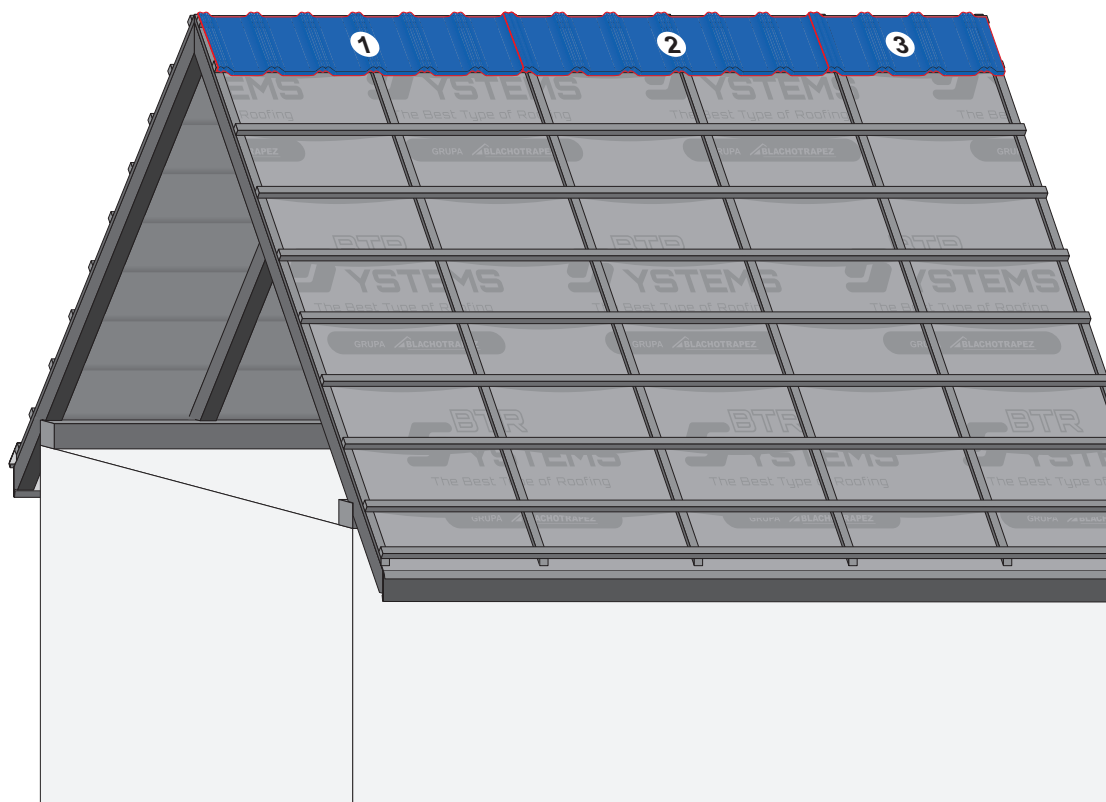


5b

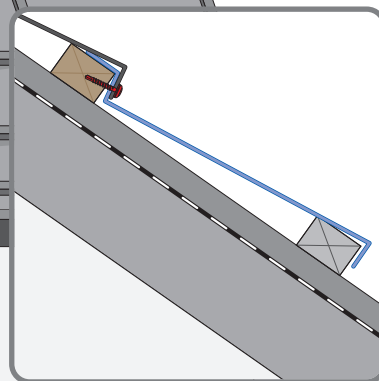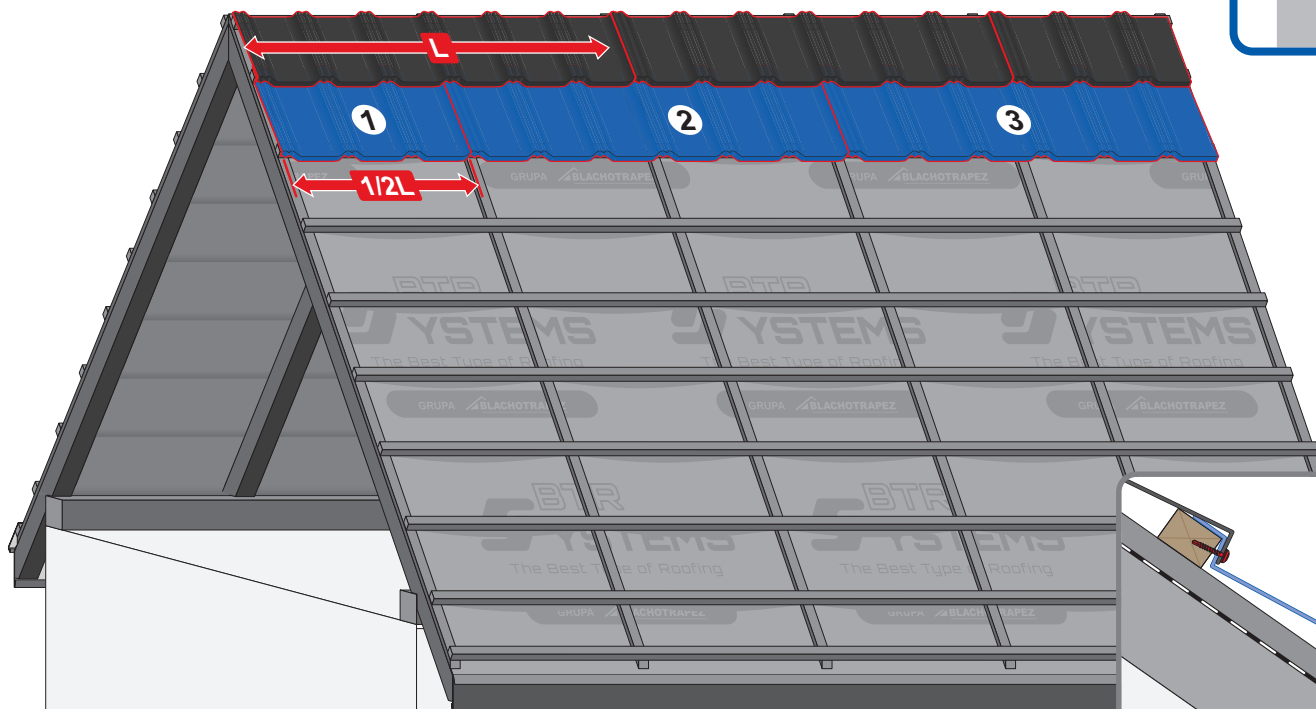


1

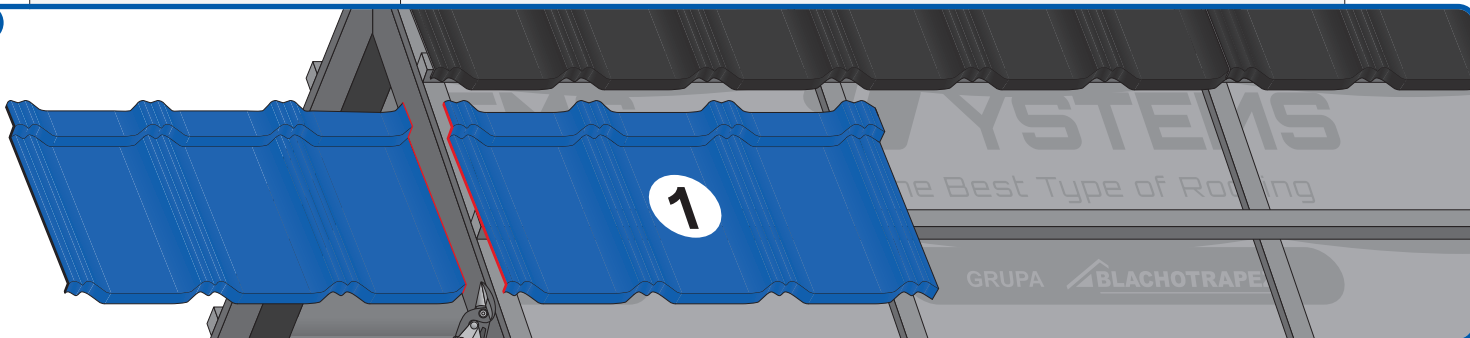





2

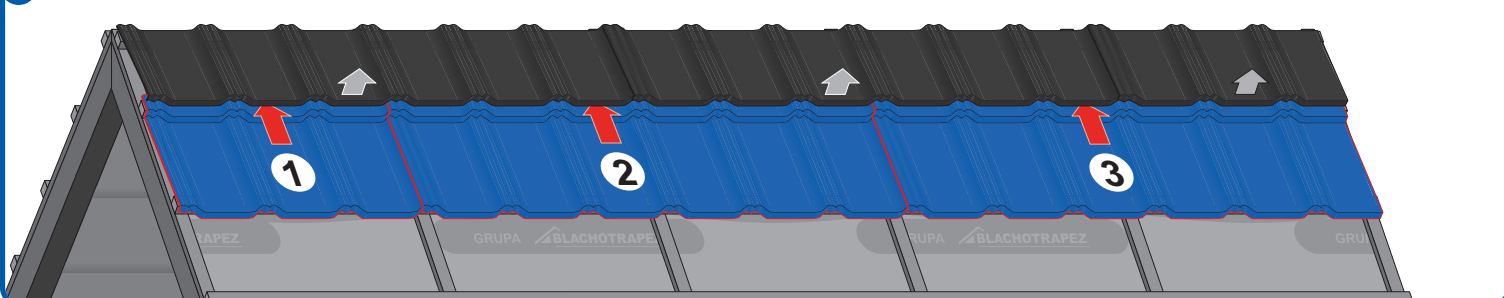


3

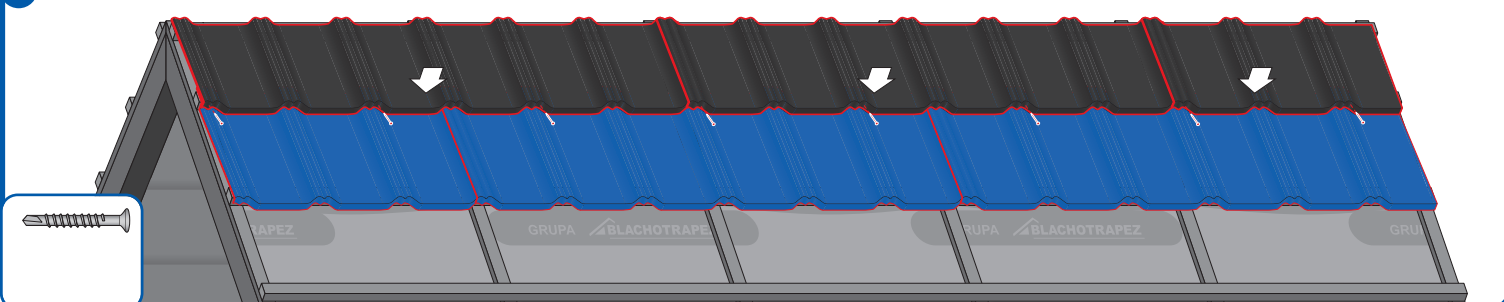


5c

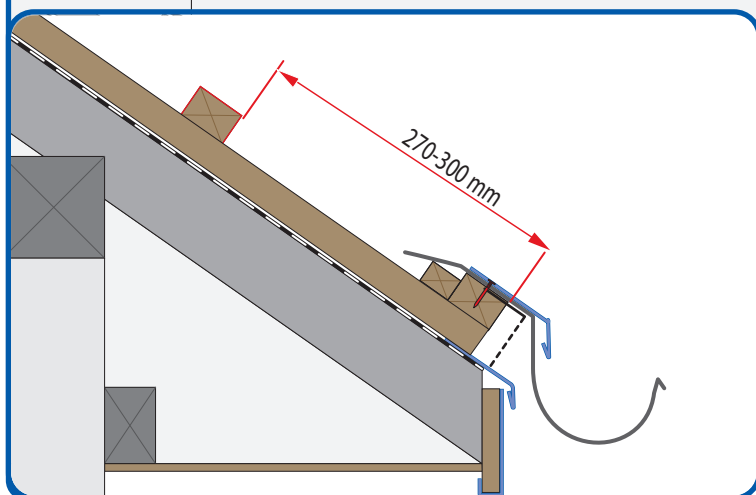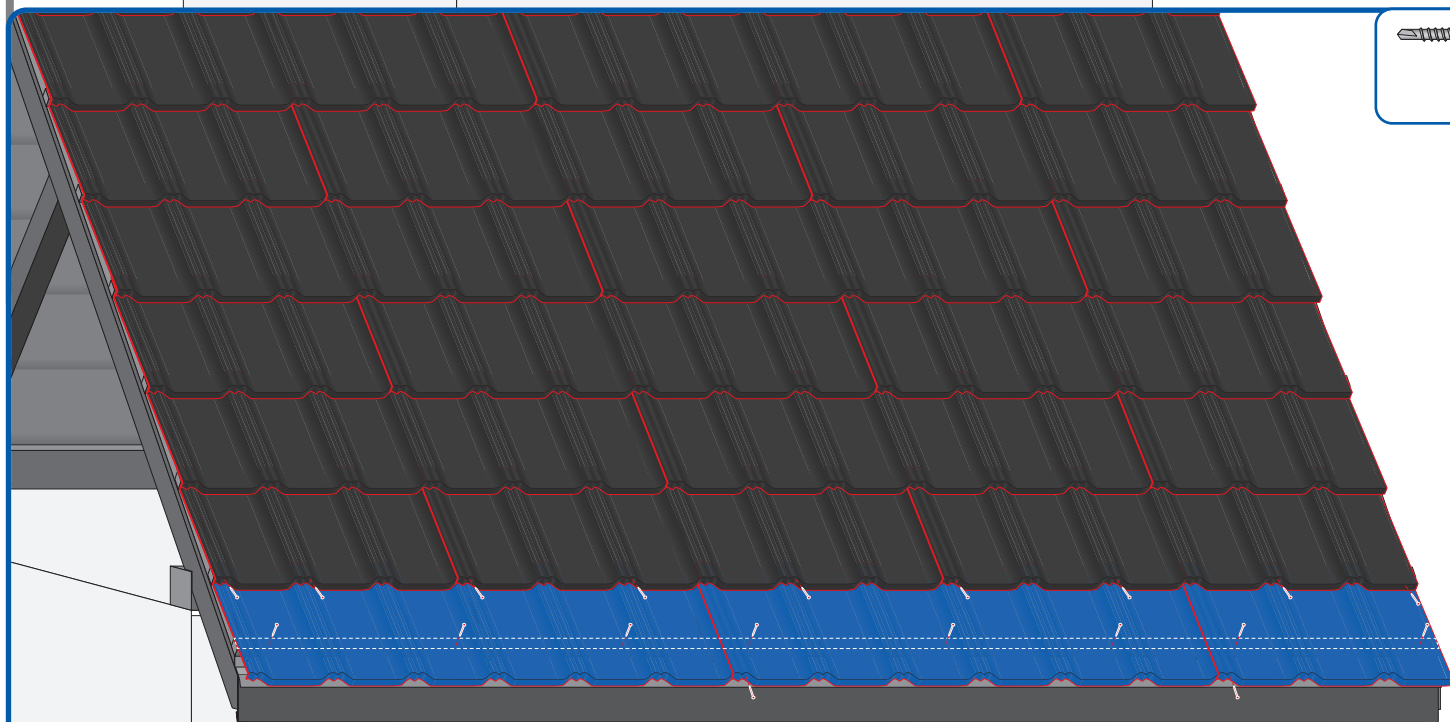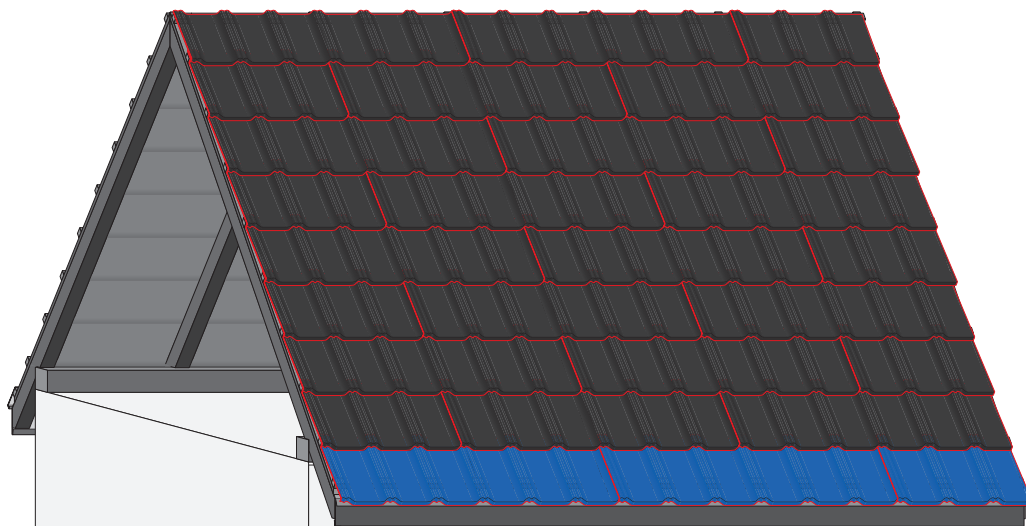



5d



5e




6a

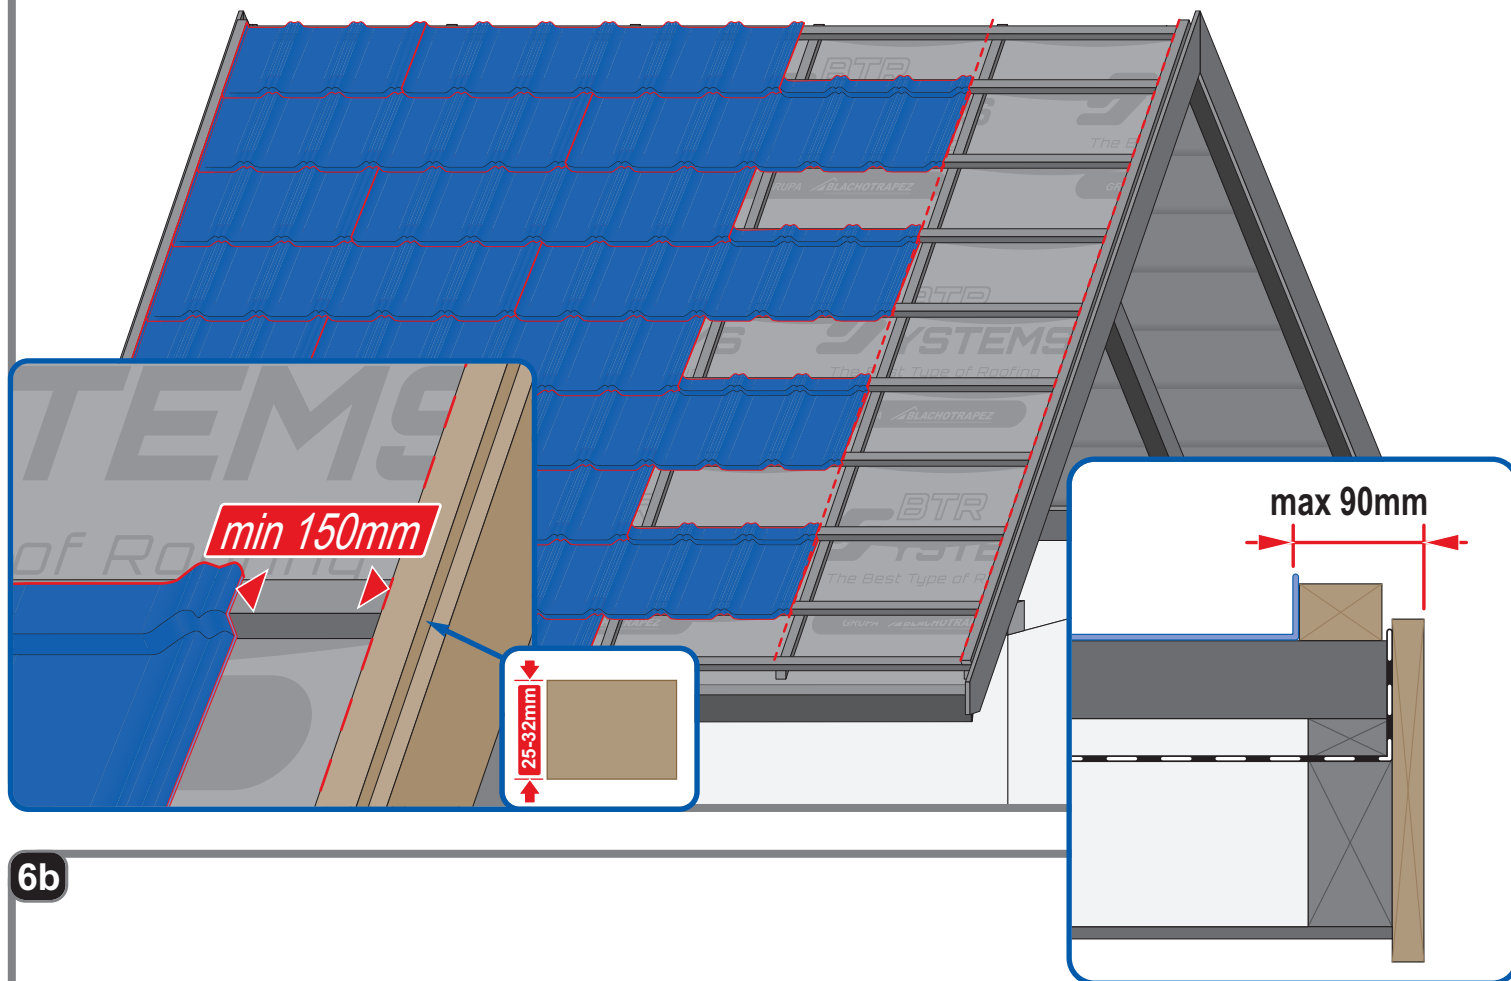


6b





6c

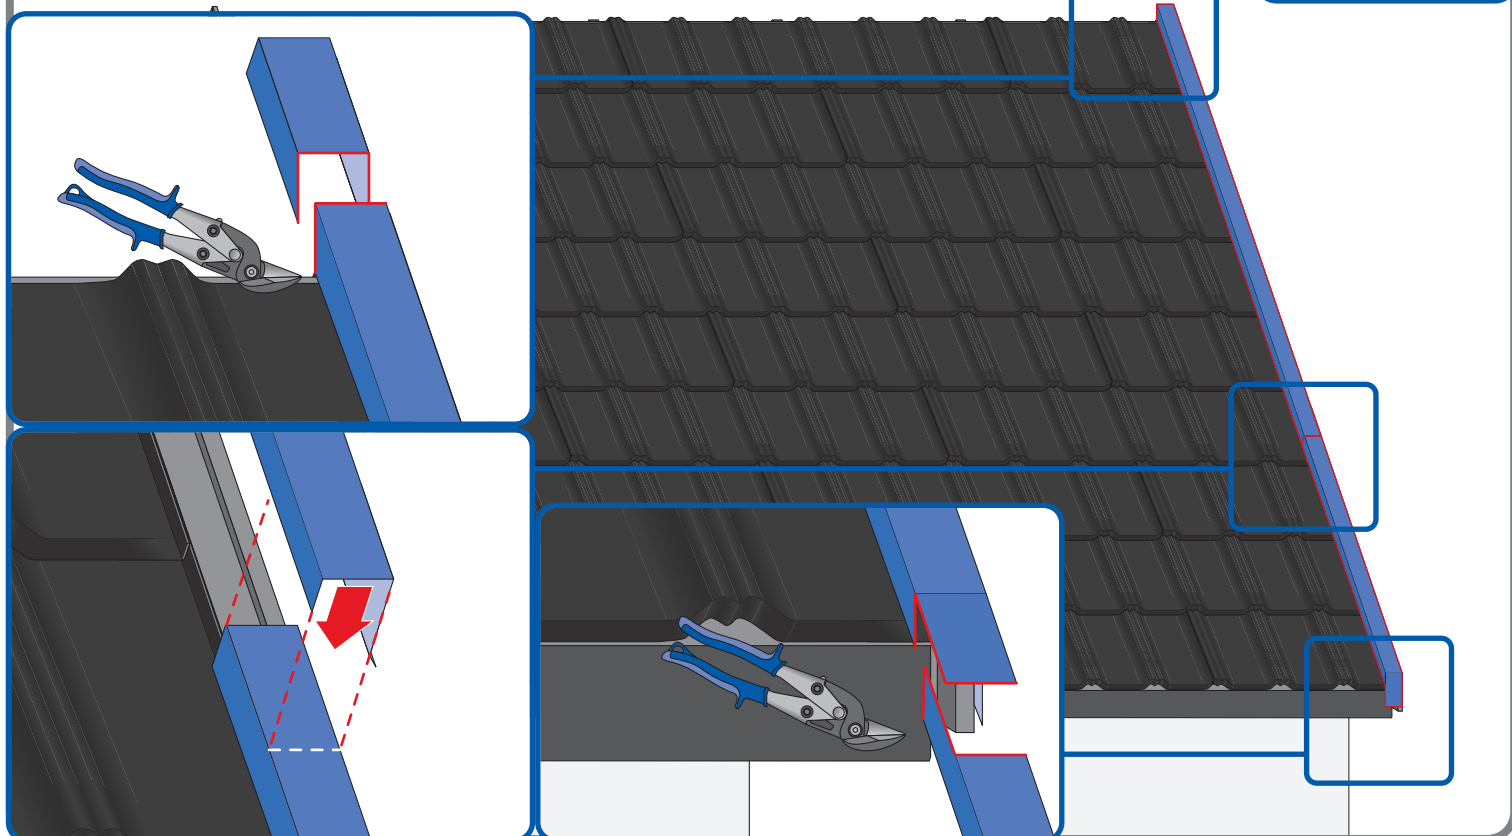




6d

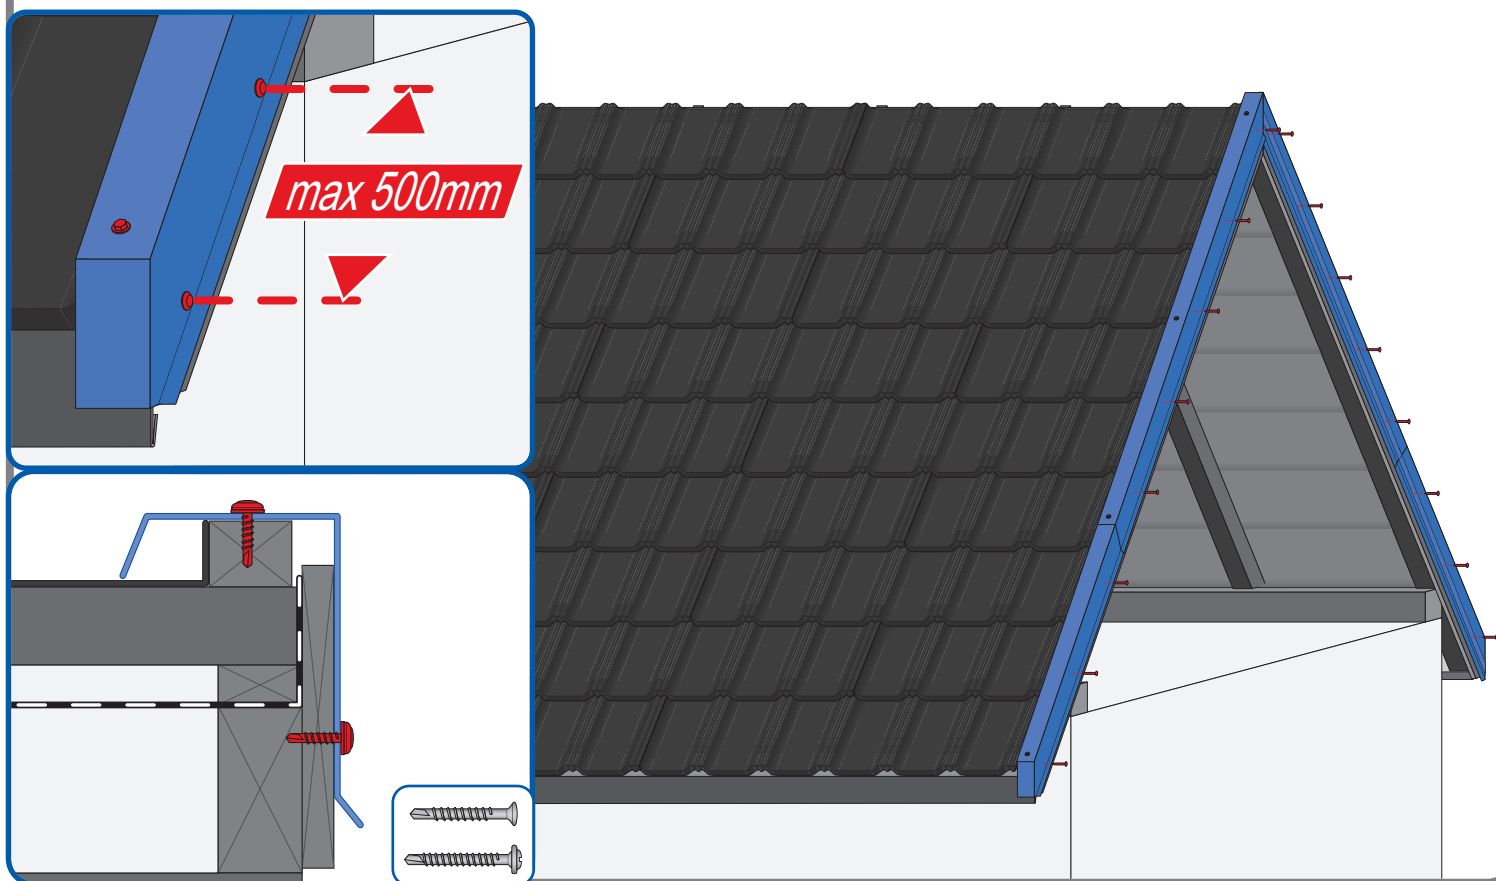









7a

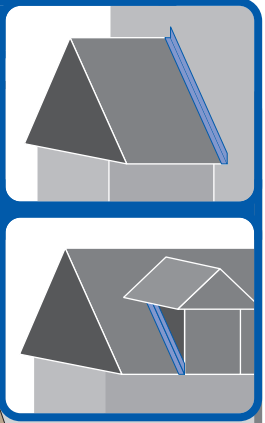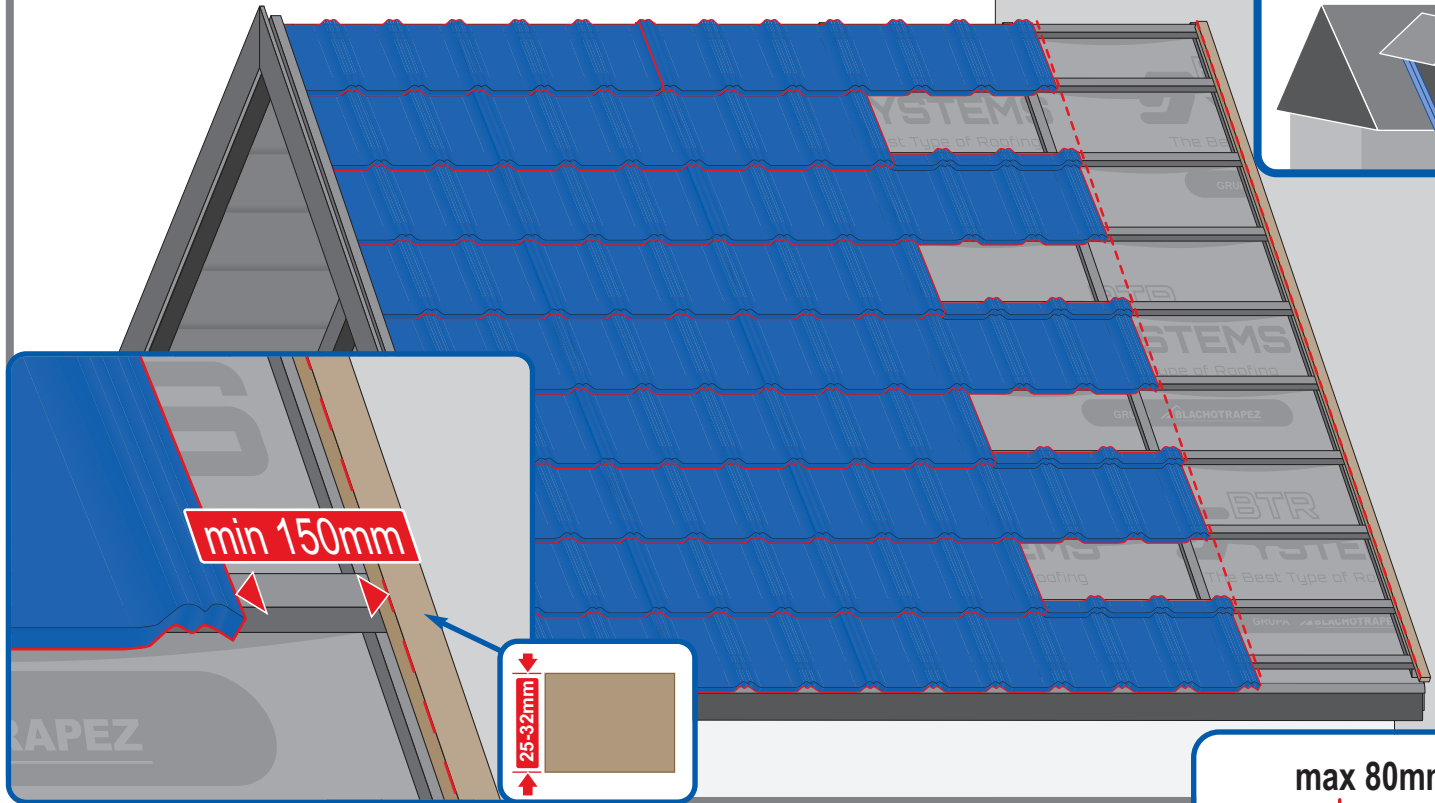





7b

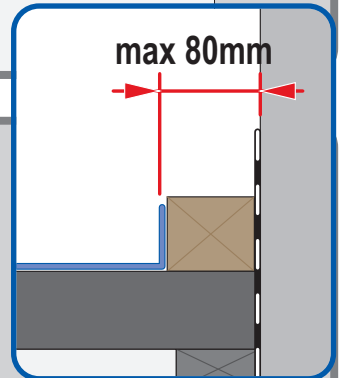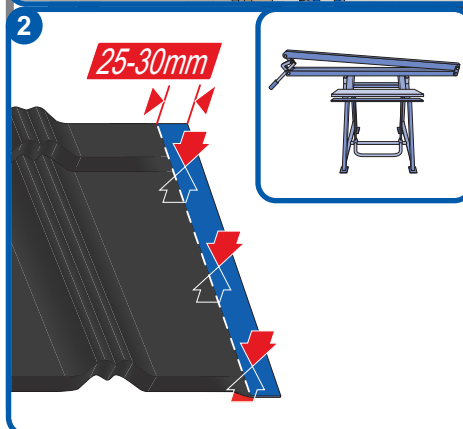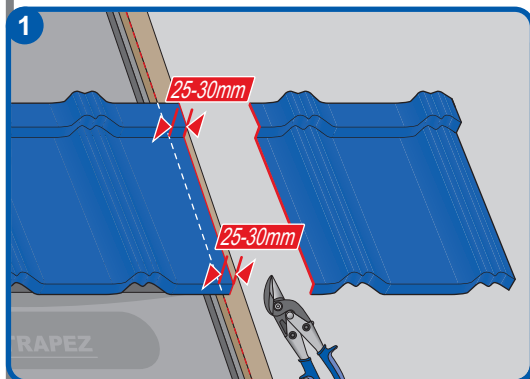


7c

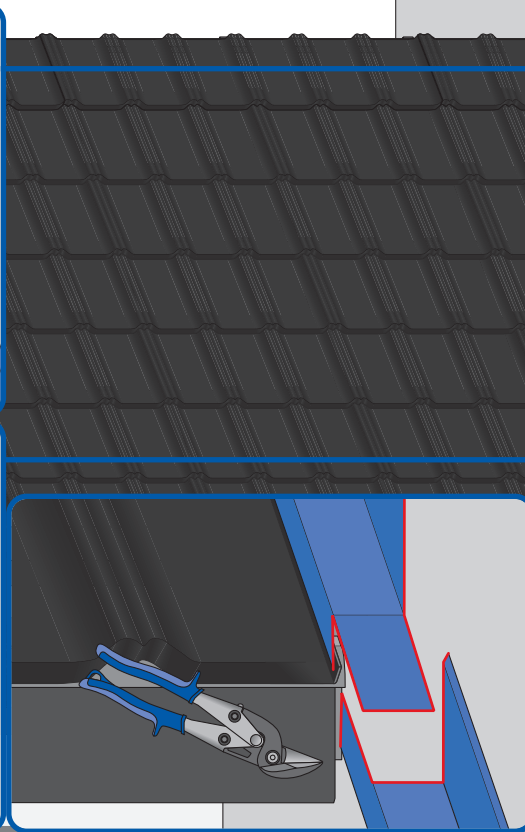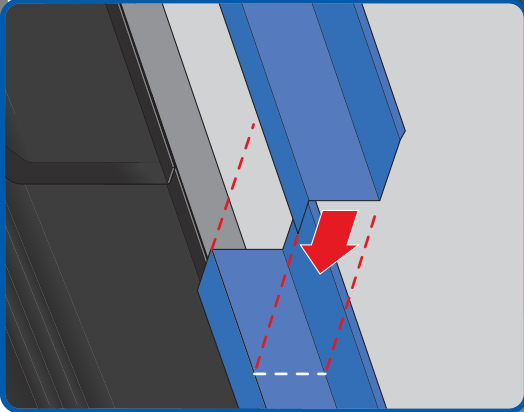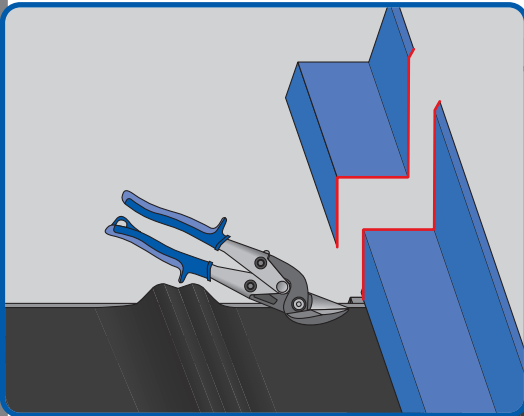


7d

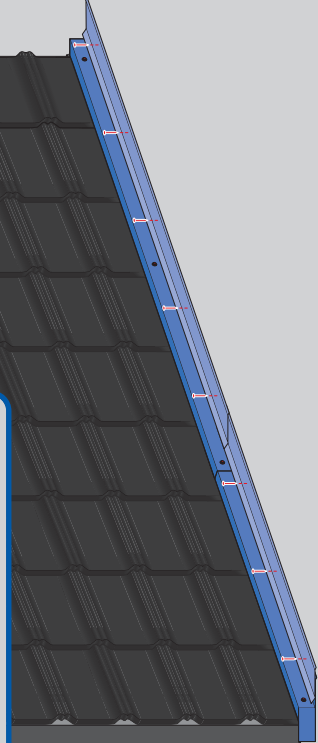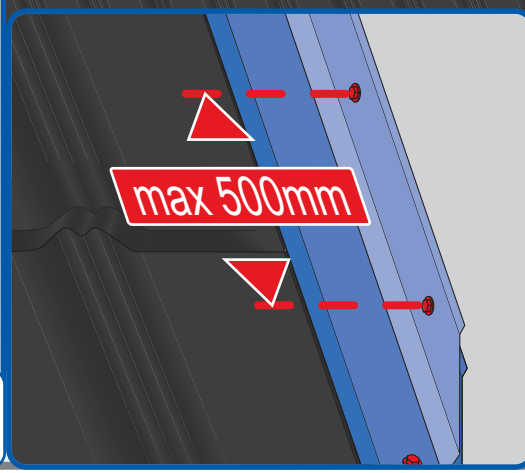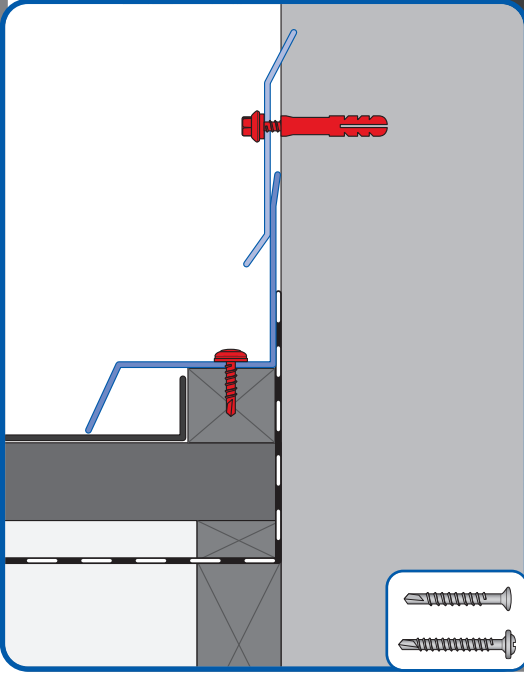





8a

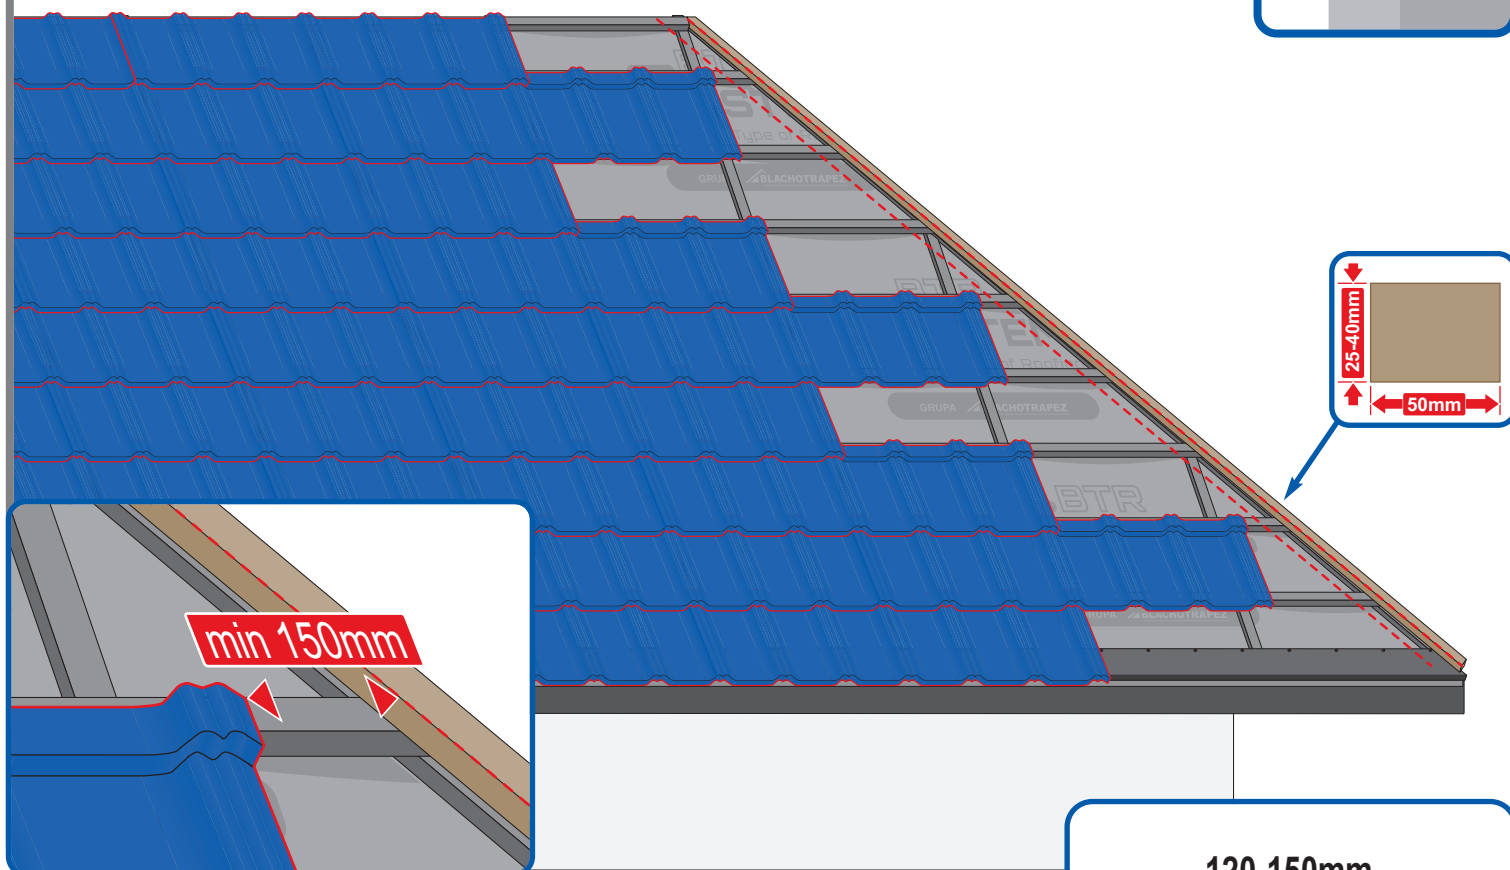





8b

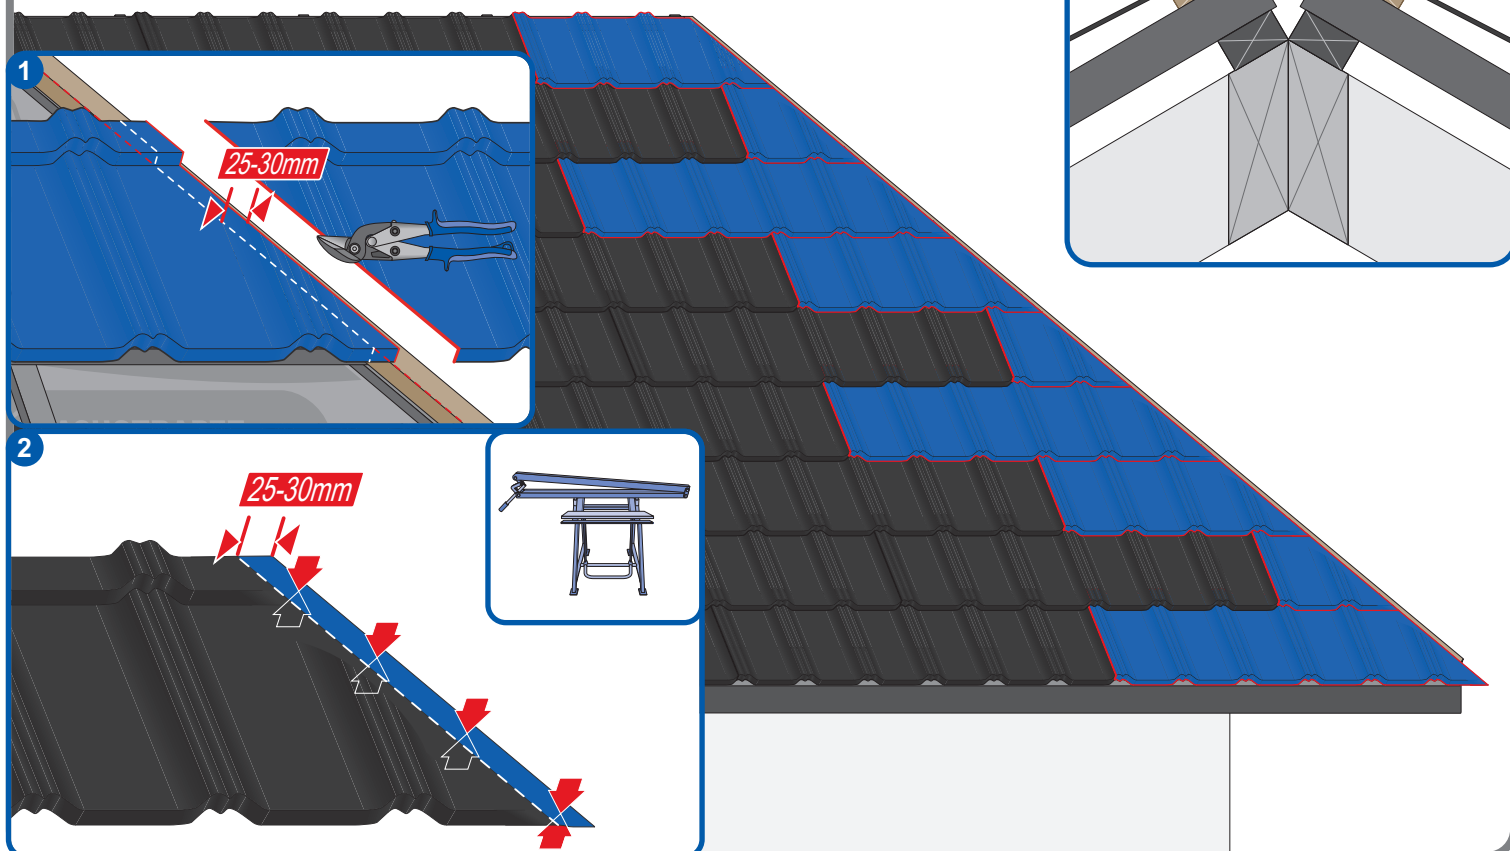


8c

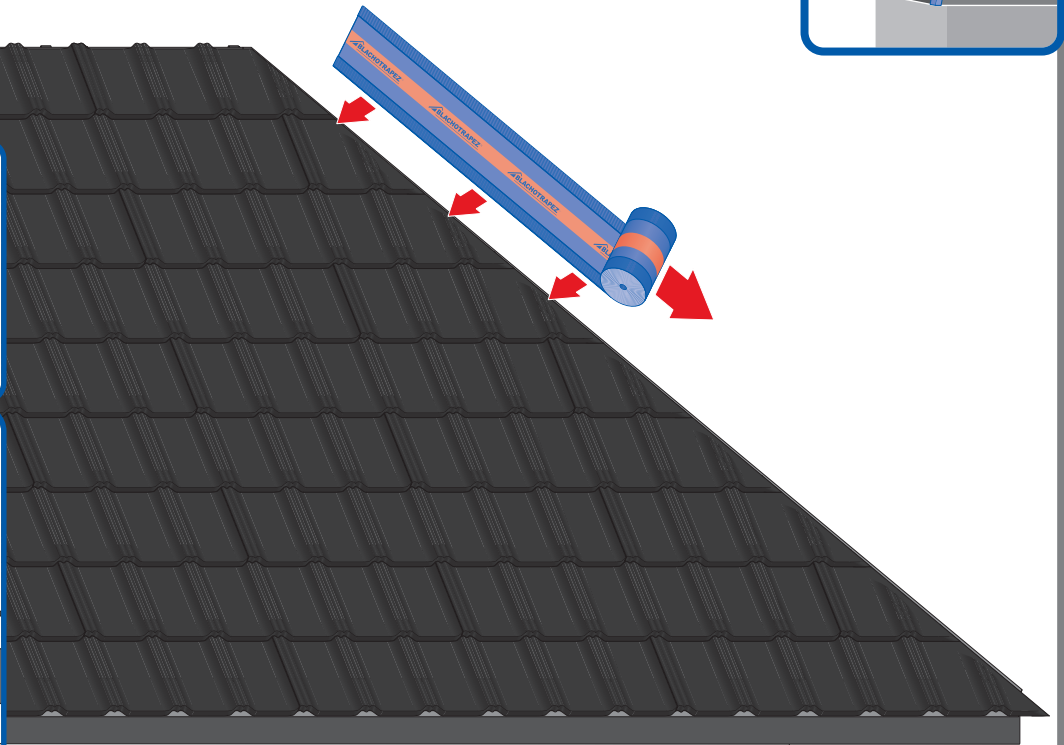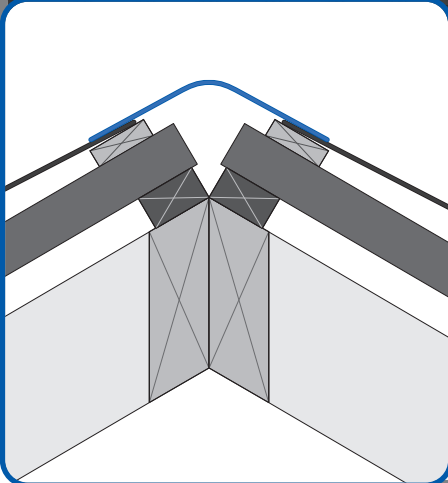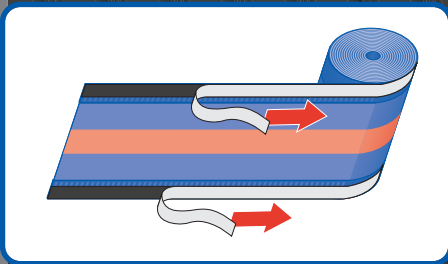


8d

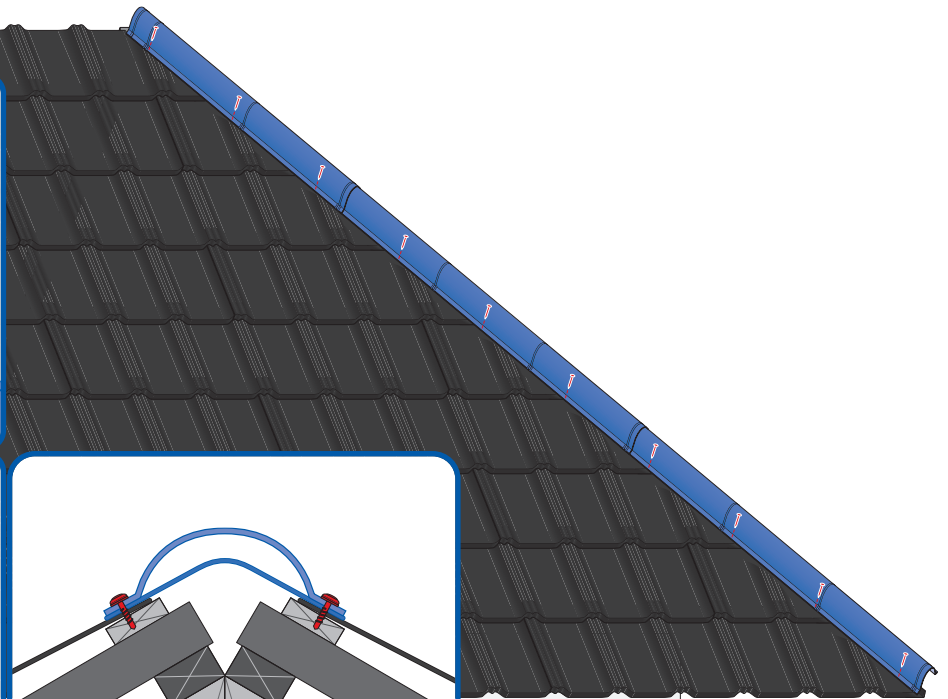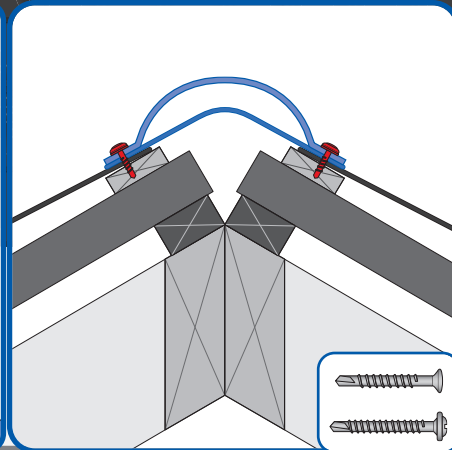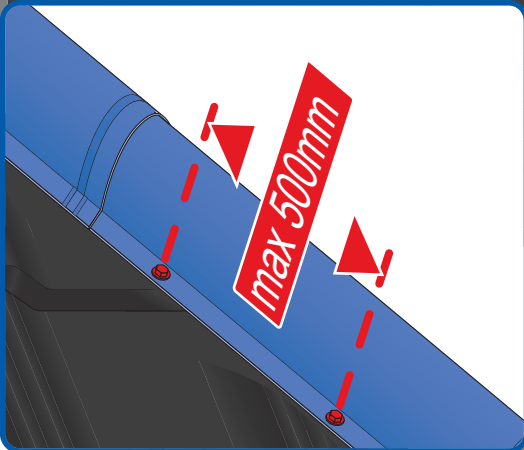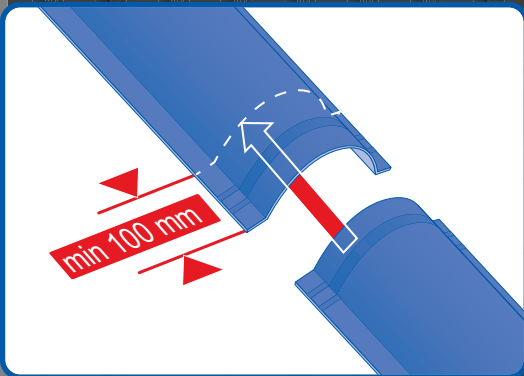







9a

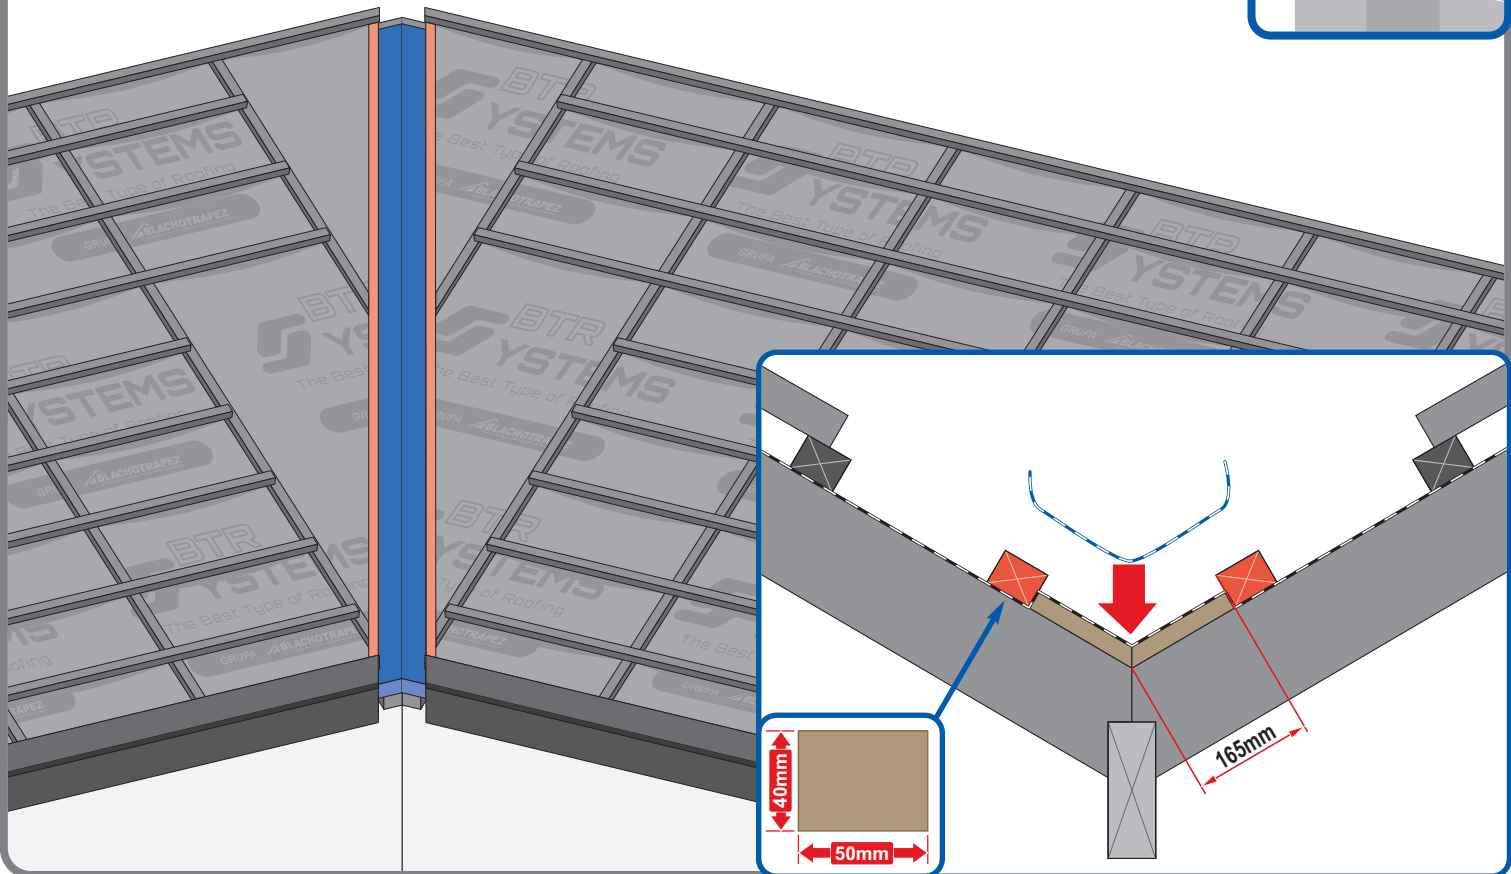


9b

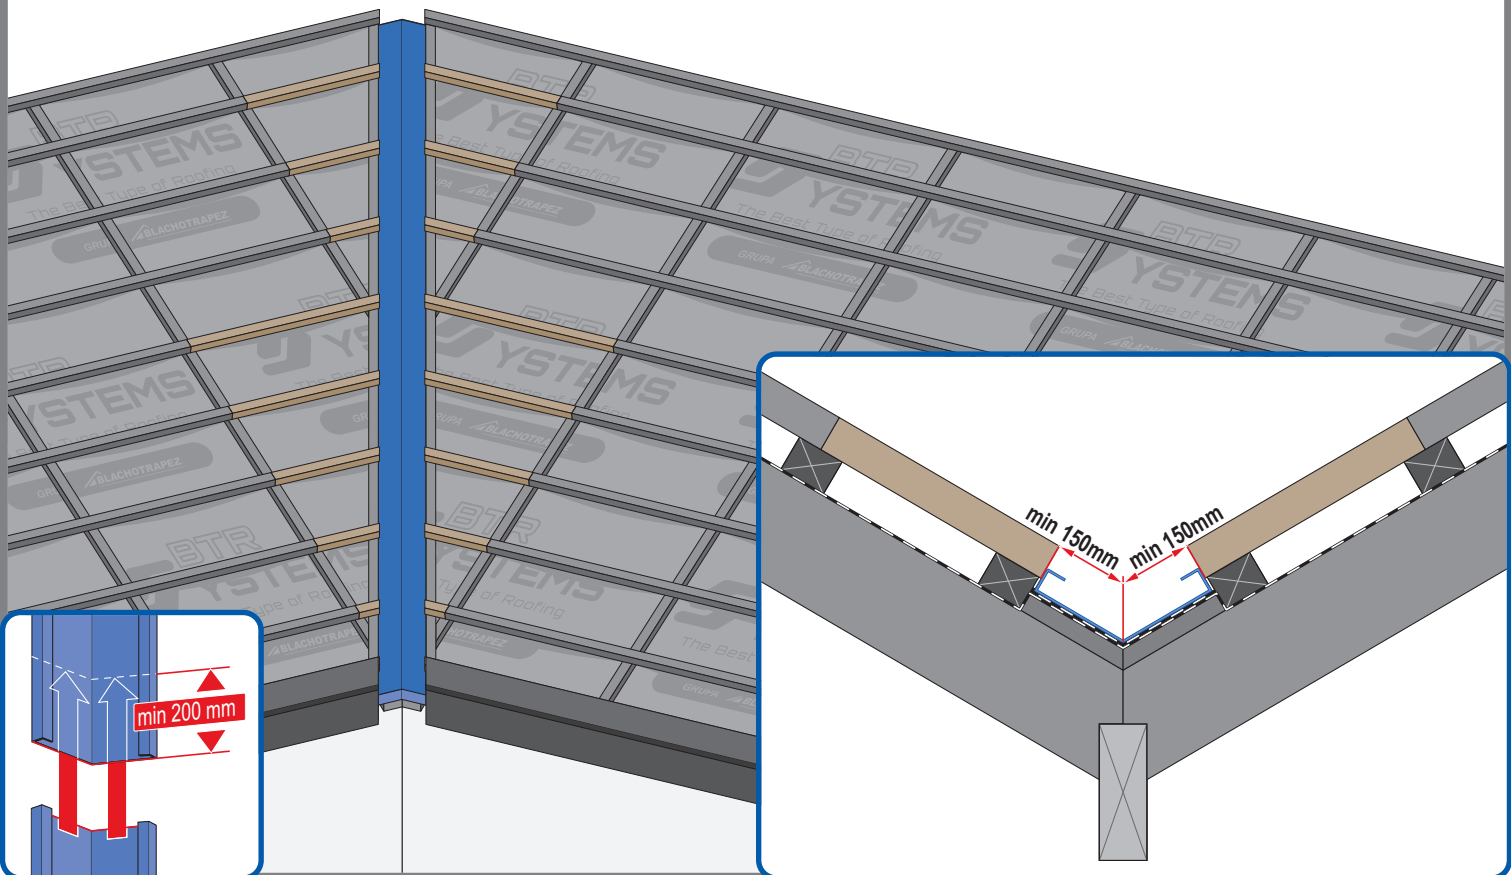


9c

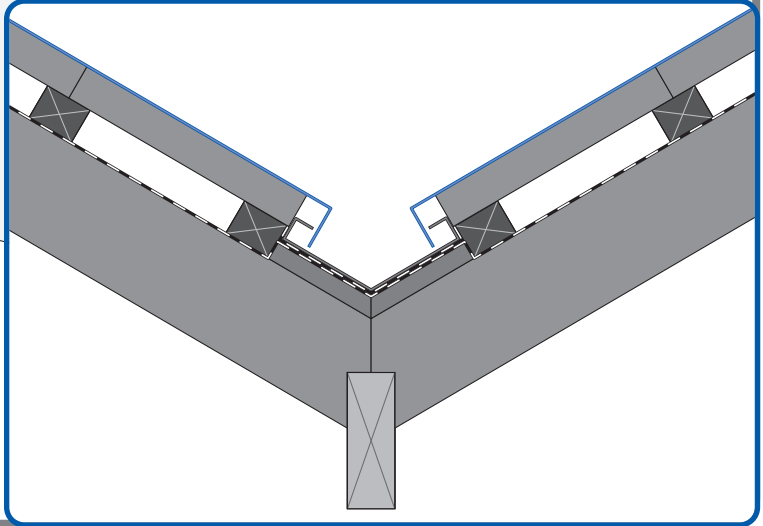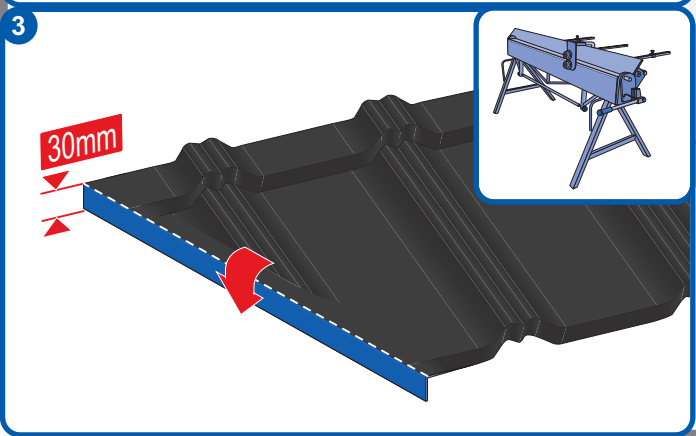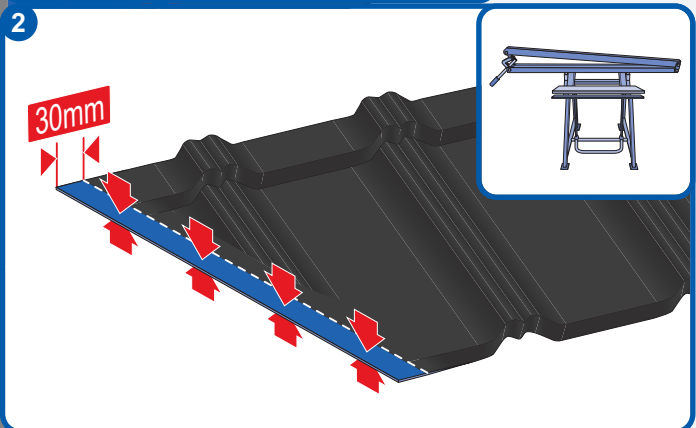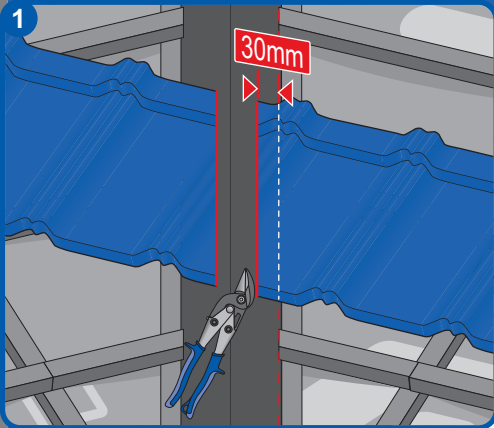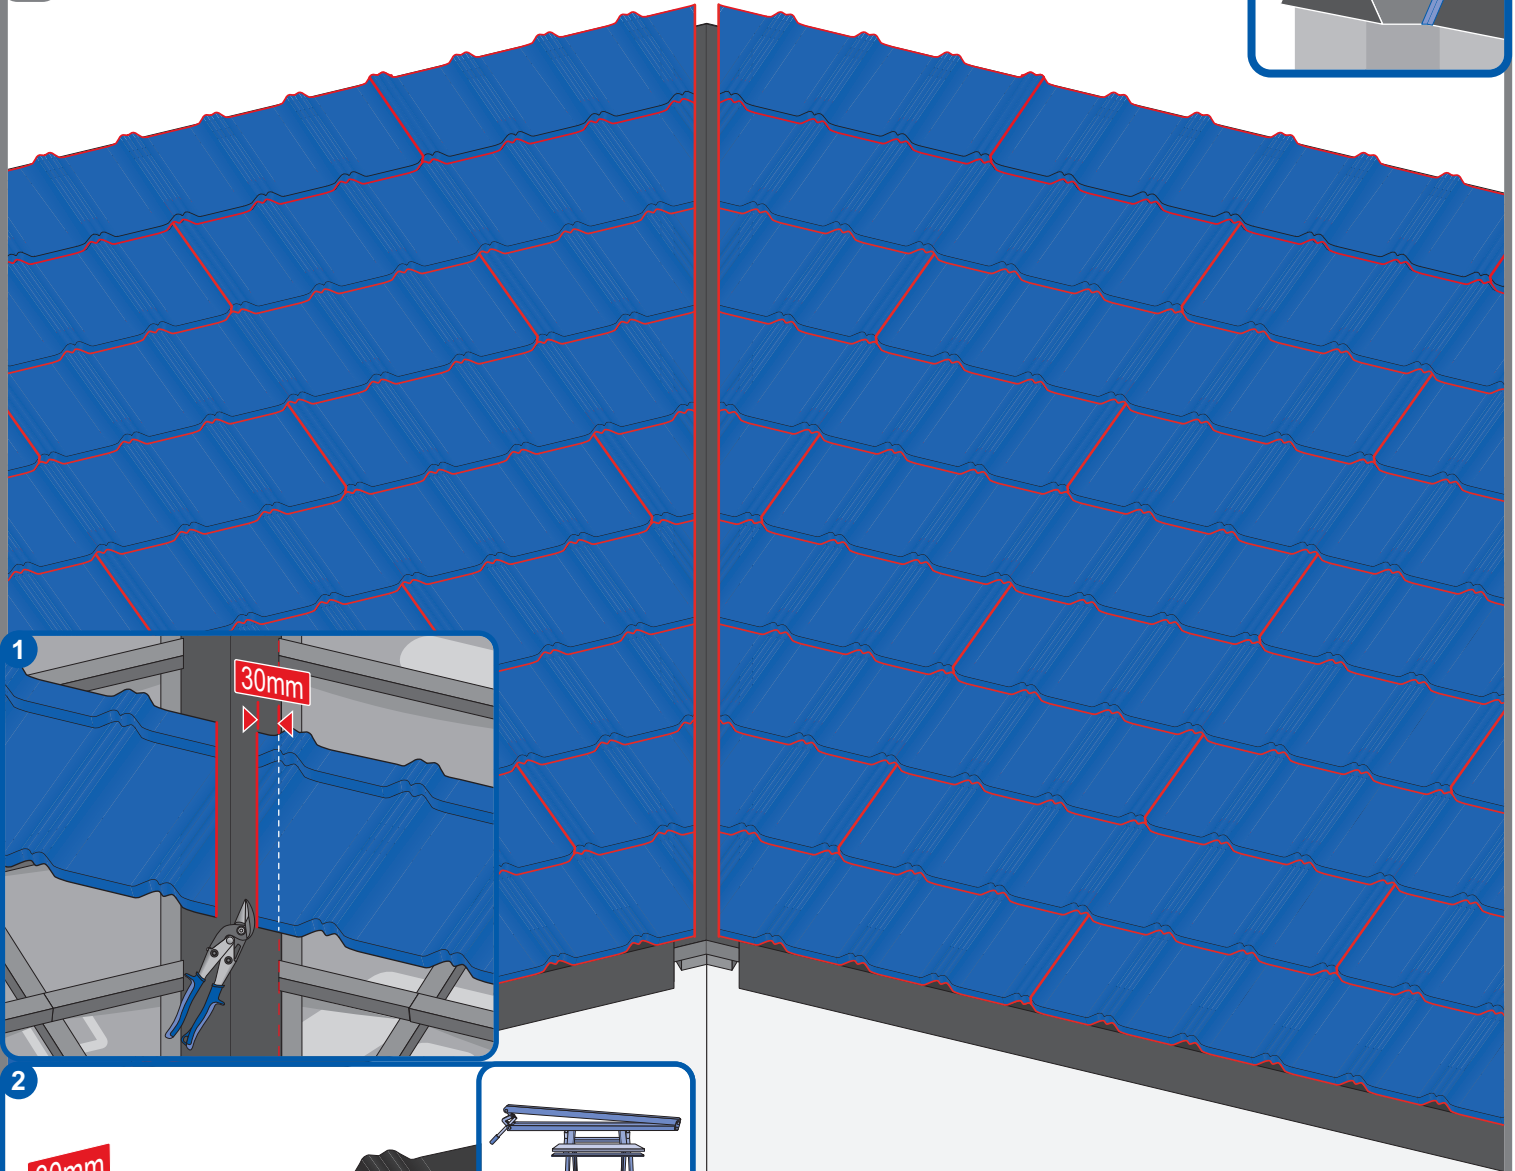


10a

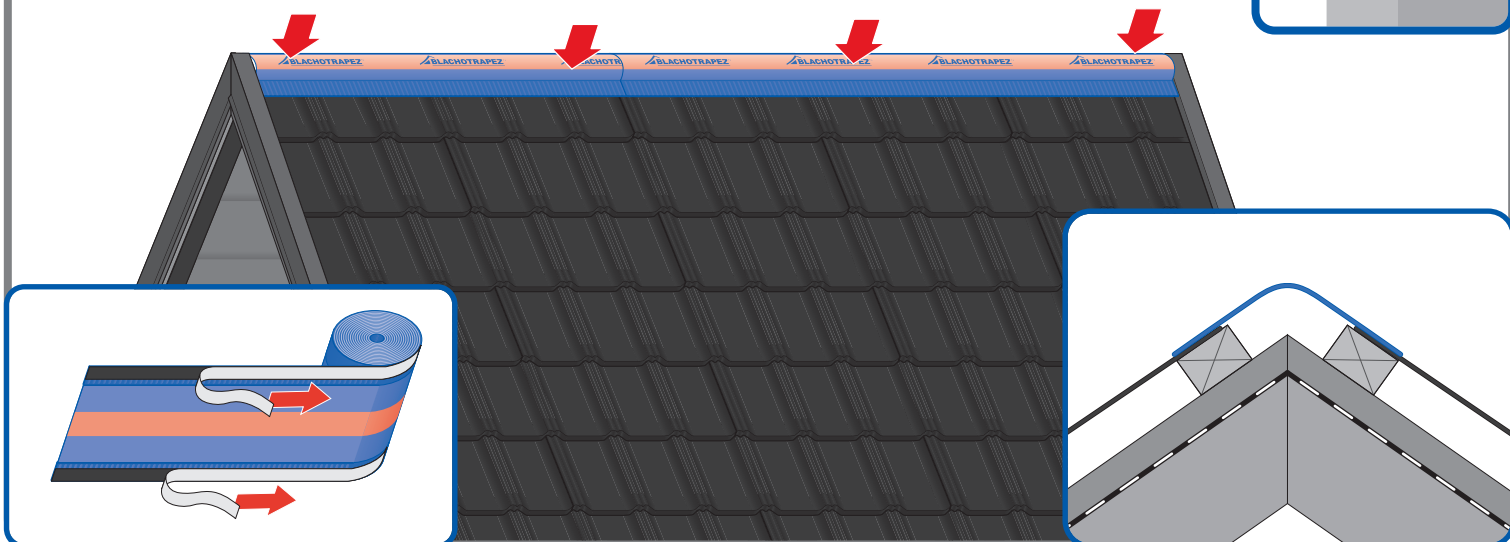


10b

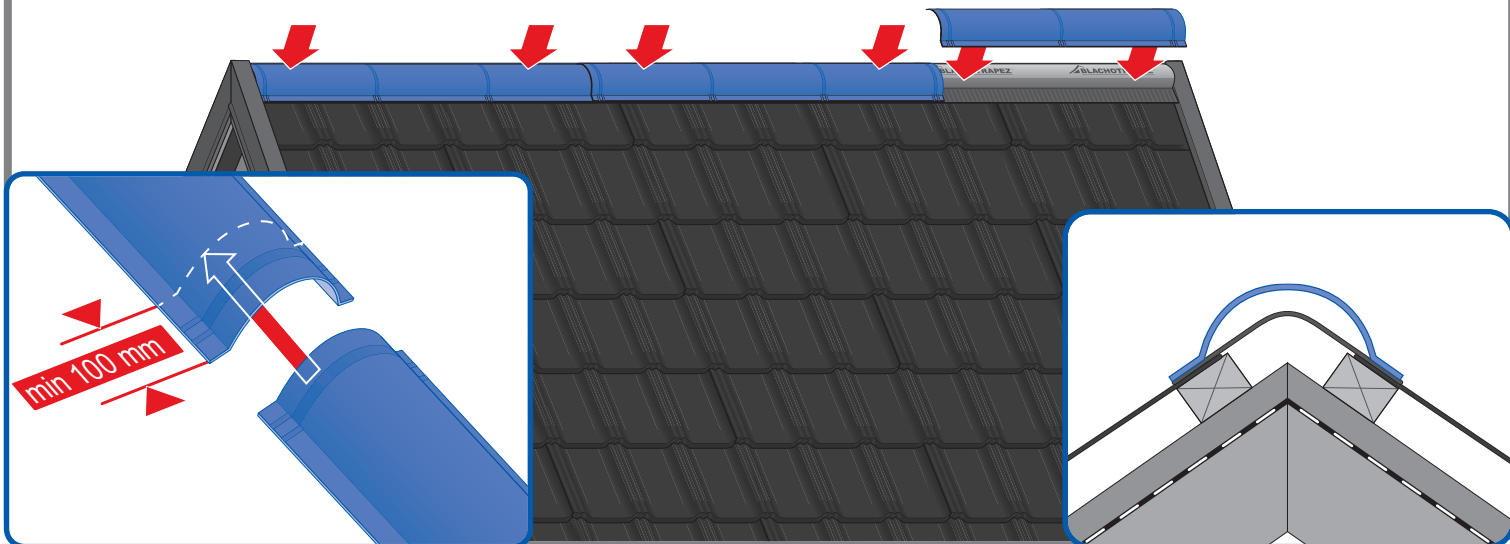


10c

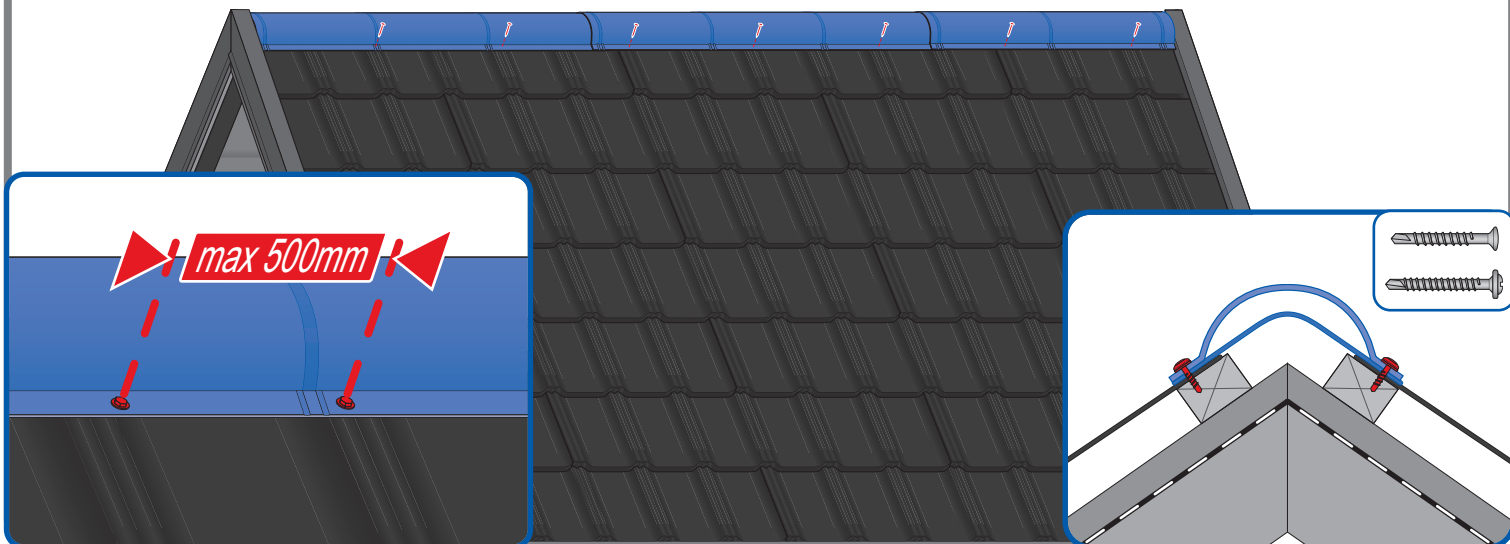


11a

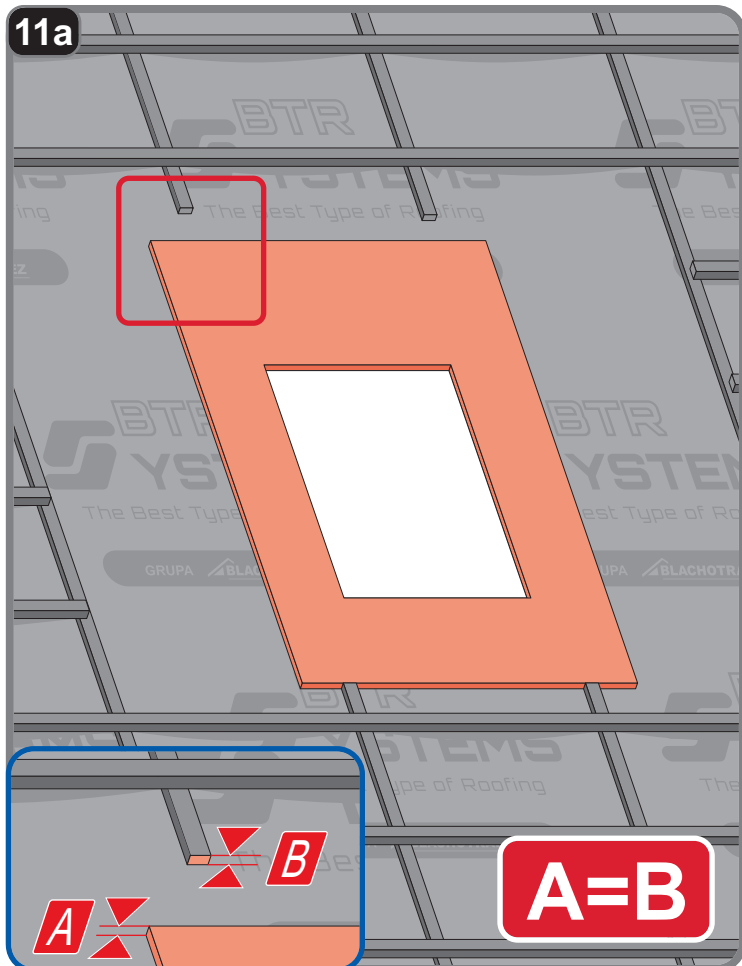


11b

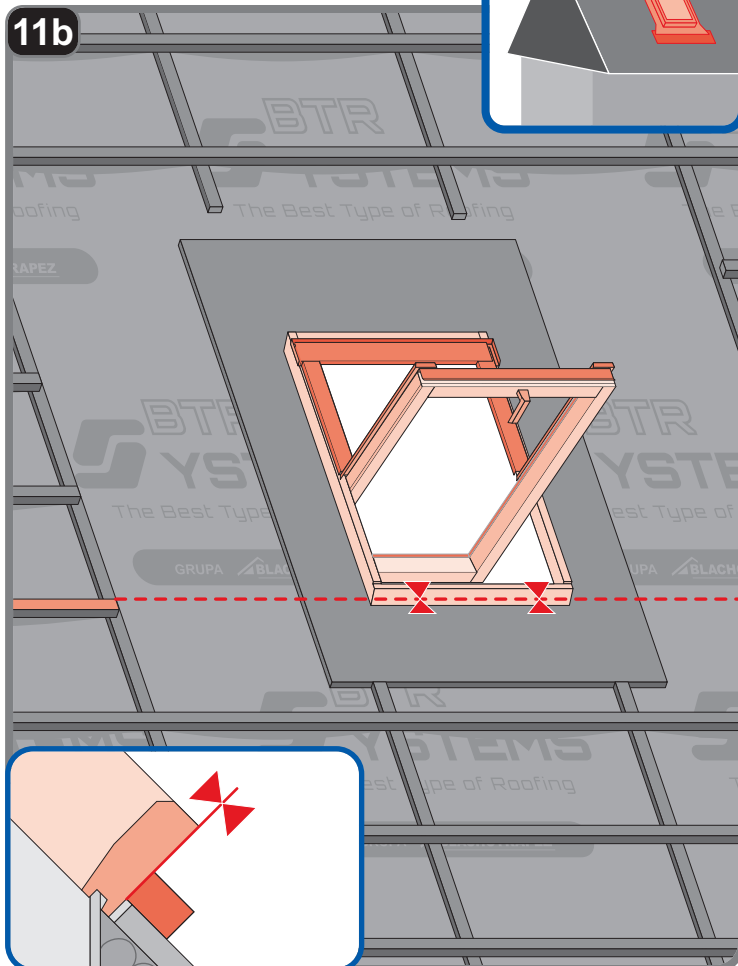


11c

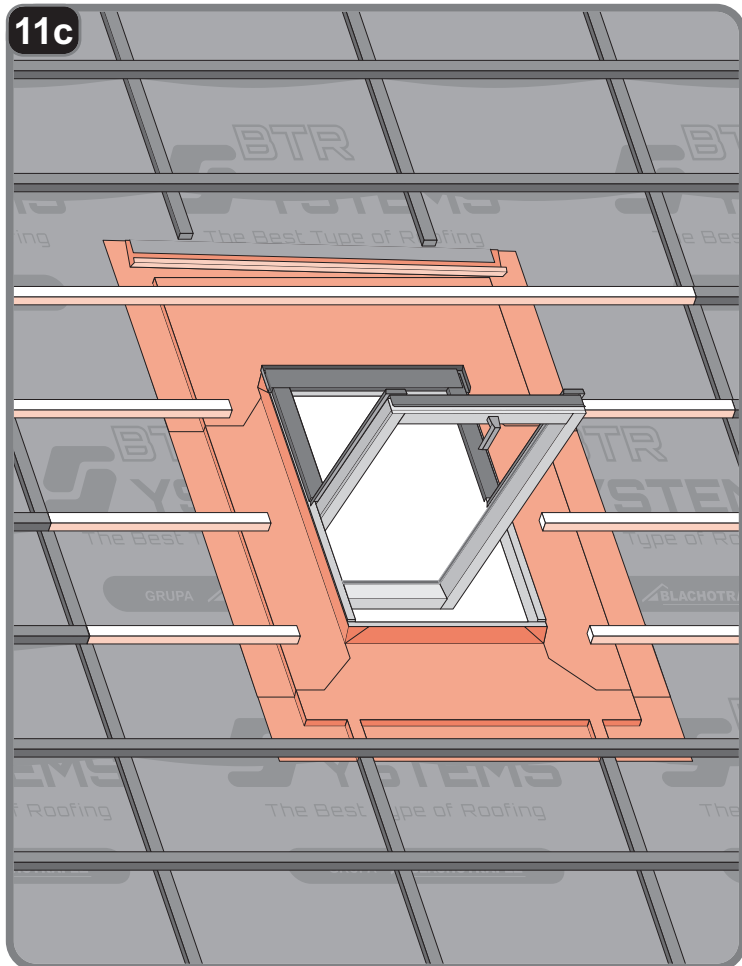


11d

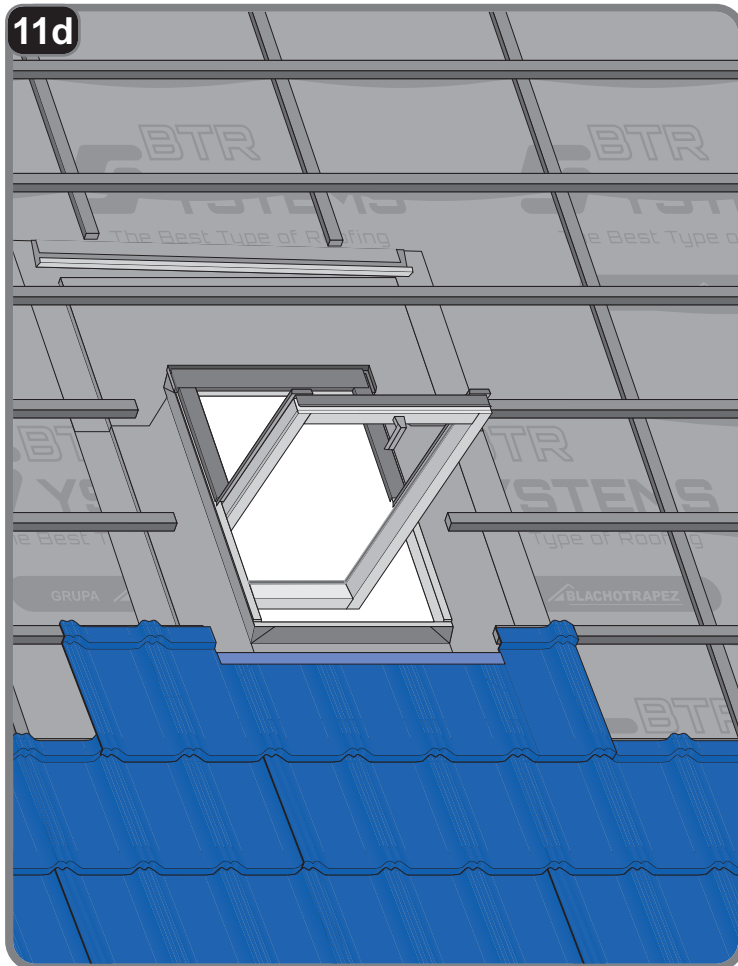

11e

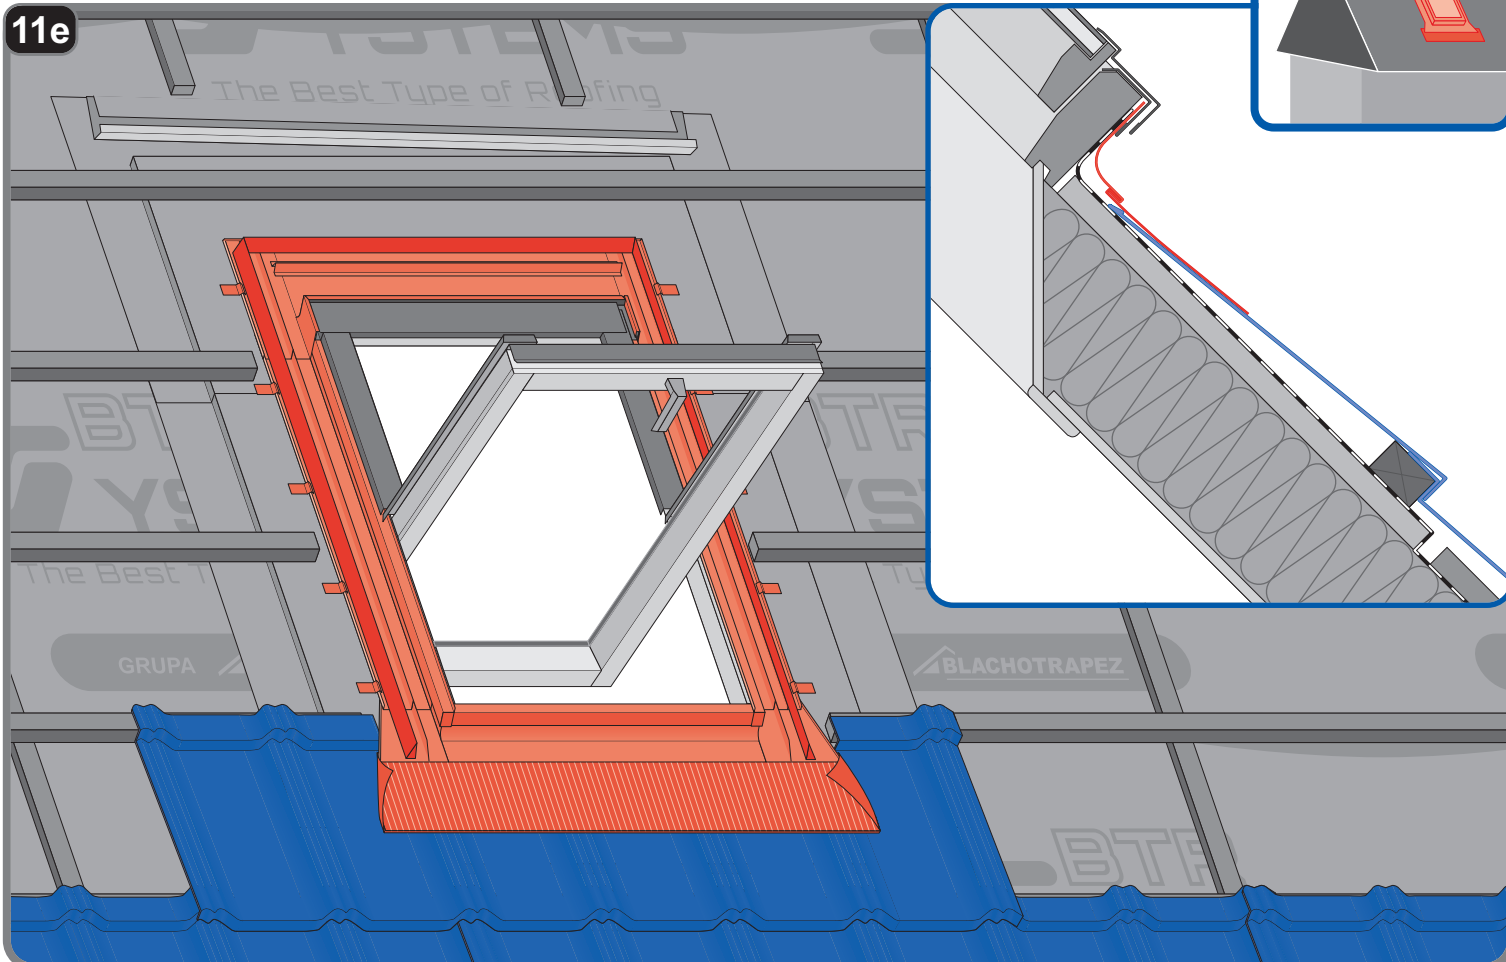

11f

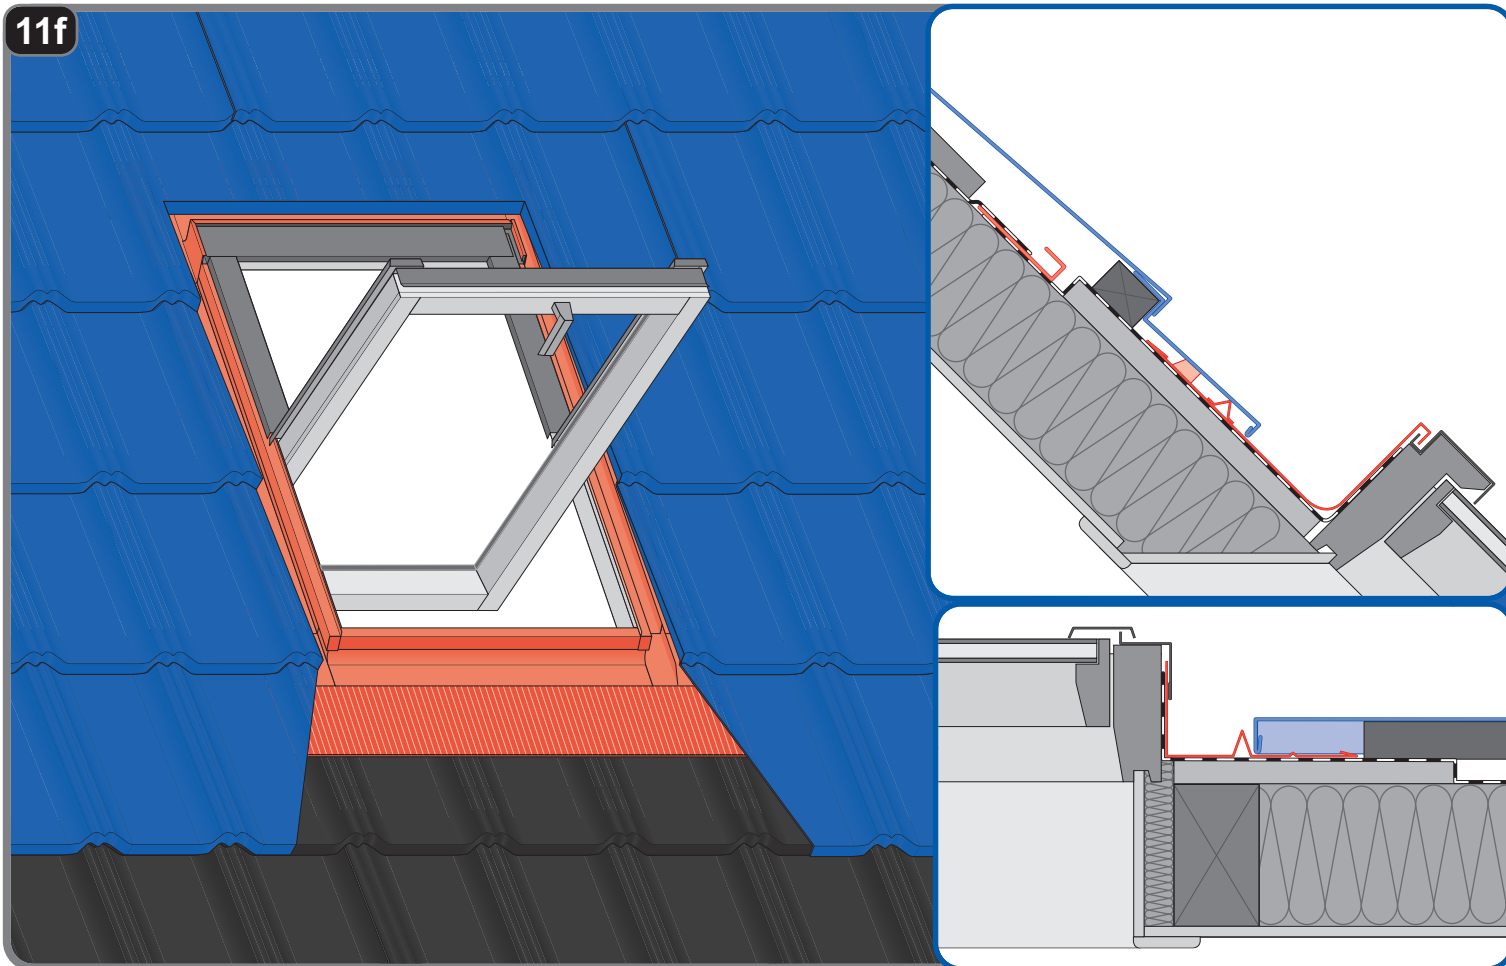



GRUPA  BLACHOTRAPEZ

1125

The rock aggregate profiles are packaged in sets secured with cardboard and PP strapping. The appropriate number of packages is placed on a pallet and then secured with stretch film and a membrane. Wooden pallets and other packaging elements protect goods during transport. The packaging method may vary depending on the country of distribution due to the specifics of the local market.

Before installation, carefully read the Product Data Sheet and these Instructions and follow the installation procedures and guidelines of the Occupational Safety and Health Administration (OSHA).

It is recommended to use personal protective equipment when walking and working on the roof. Such equipment includes fall protection equipment and personal protective equipment such as gloves, safety glasses, safety helmets and safety harnesses, etc. Avoid contact with sharp sheet edges.

Sheet products are recyclable. They should be disposed of at a point for selective waste collection after the end of their product life cycle.

The installation of roofing sheets requires professional expertise and experience. This manual is an illustrative material and does not relieve the parties involved in the construction process and contractors of their obligation to observe the rules of good technical practice. The installation methods shown in this manual are only general guidelines. The required installation method may differ from that indicated in the manual, depending on the roof type or regional solutions. To use the general instructions and installation guidance, follow the guidelines of the engineer or contact our technical support department. Experienced contractors have customised solutions, which BLACHOTRAPEZ accepts.