




Installation manual





GRUPA  **BLACHOTRAPEZ**

POLAR


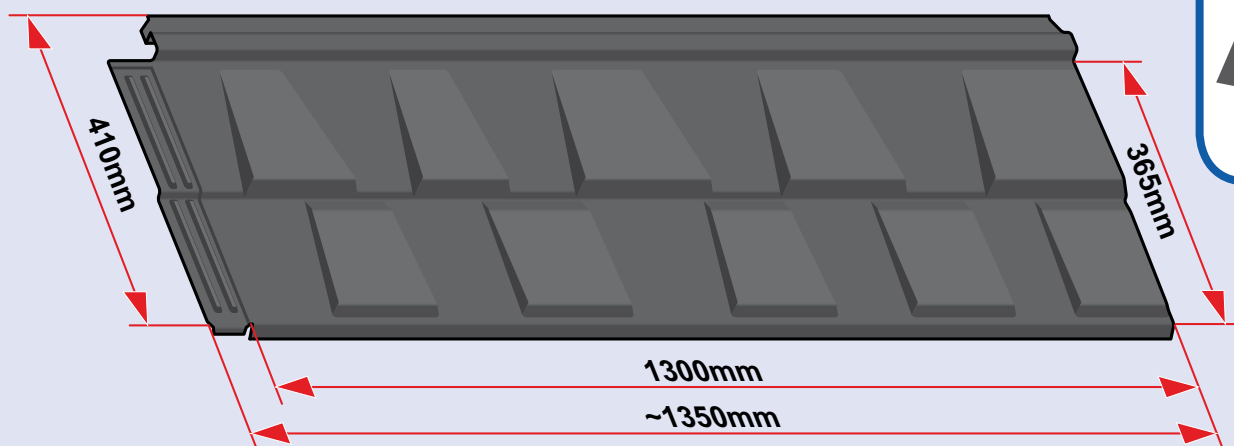


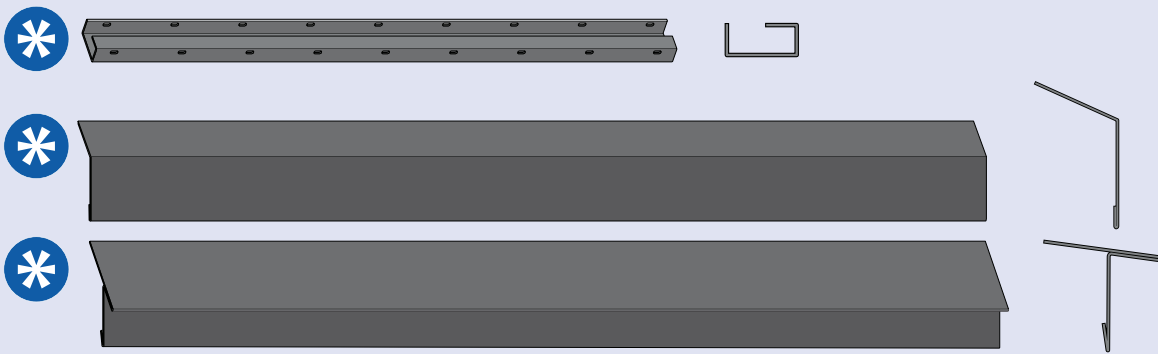



L=2000 mm

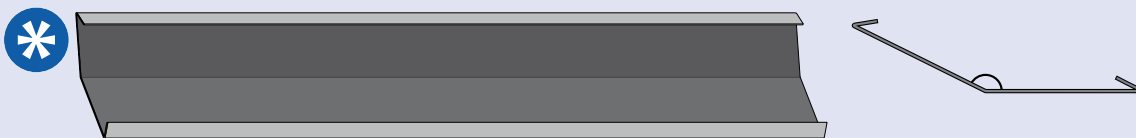



L=2000 mm

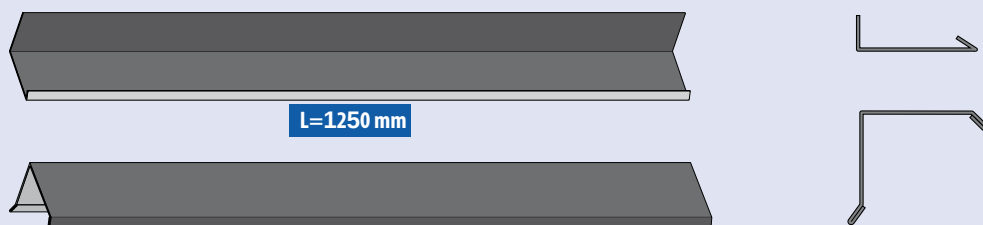



L=1250 mm





L=2000 mm

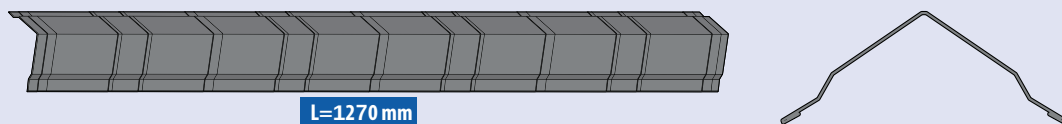

L=1270 mm

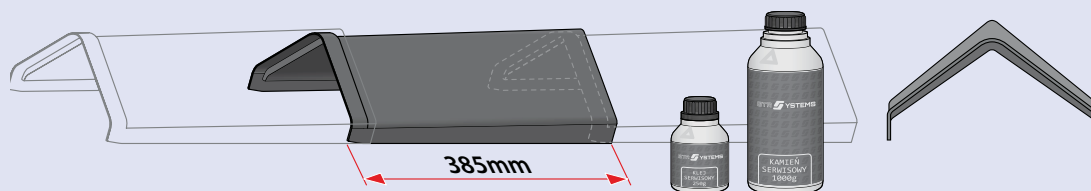



385mm




* Star-shaped flashings made to order from coated sheet metal

1


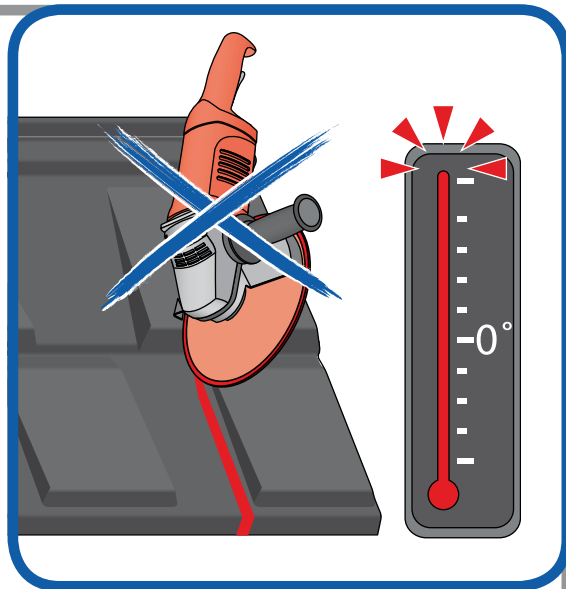
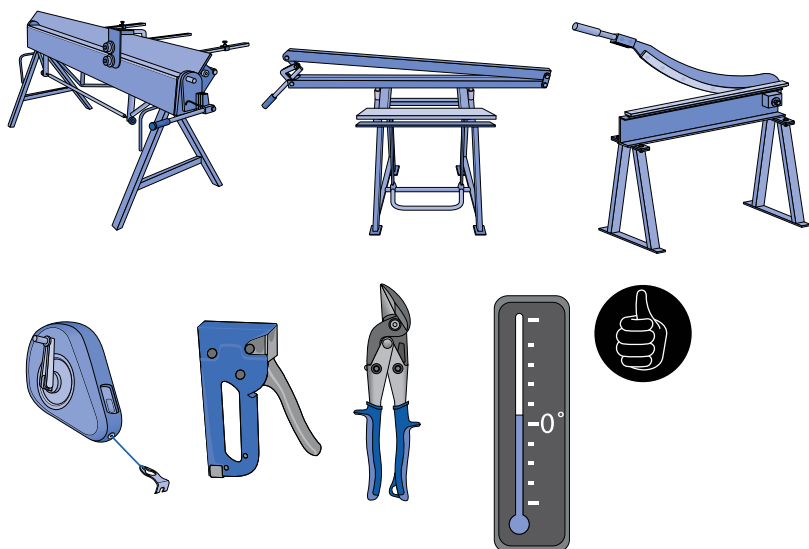


Installation is not recommended at temperatures below 5°C. Do not install, bend or walk on the sheets when they are damp. The coatings of the panels and accessories of BTR SYSTEMS are more likely to crack during work in low ambient temperatures. Therefore, all cutting and bending work should preferably be performed using products stored in a dry and warm place.





2



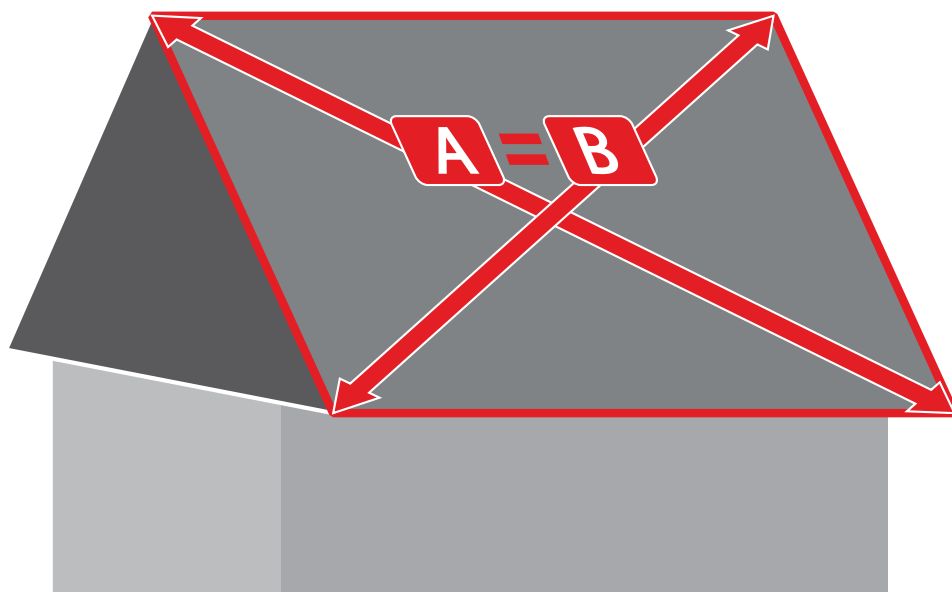


3a



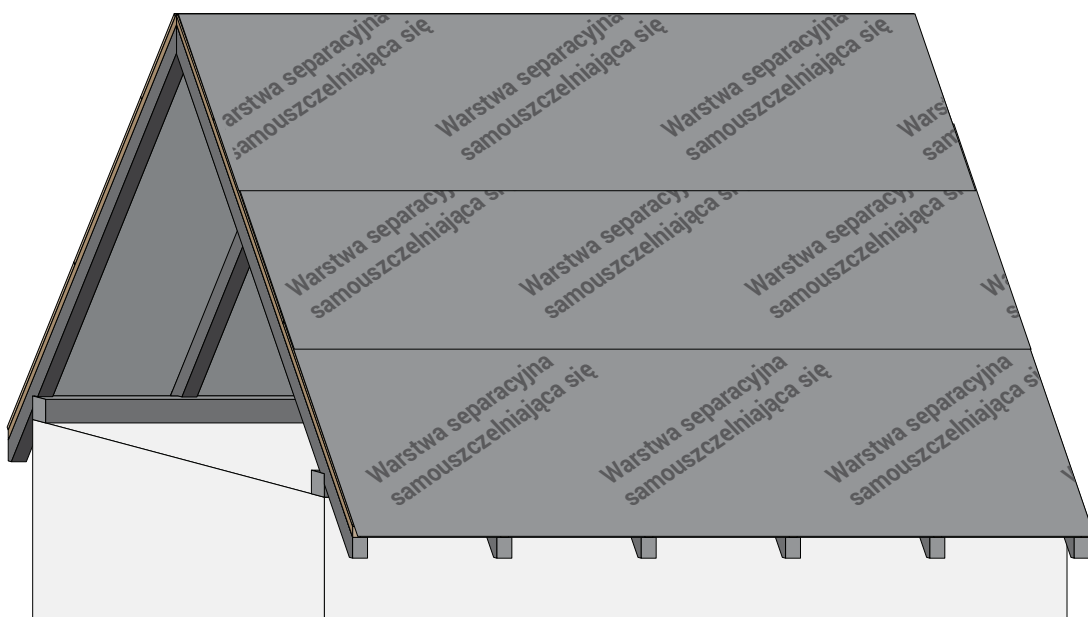
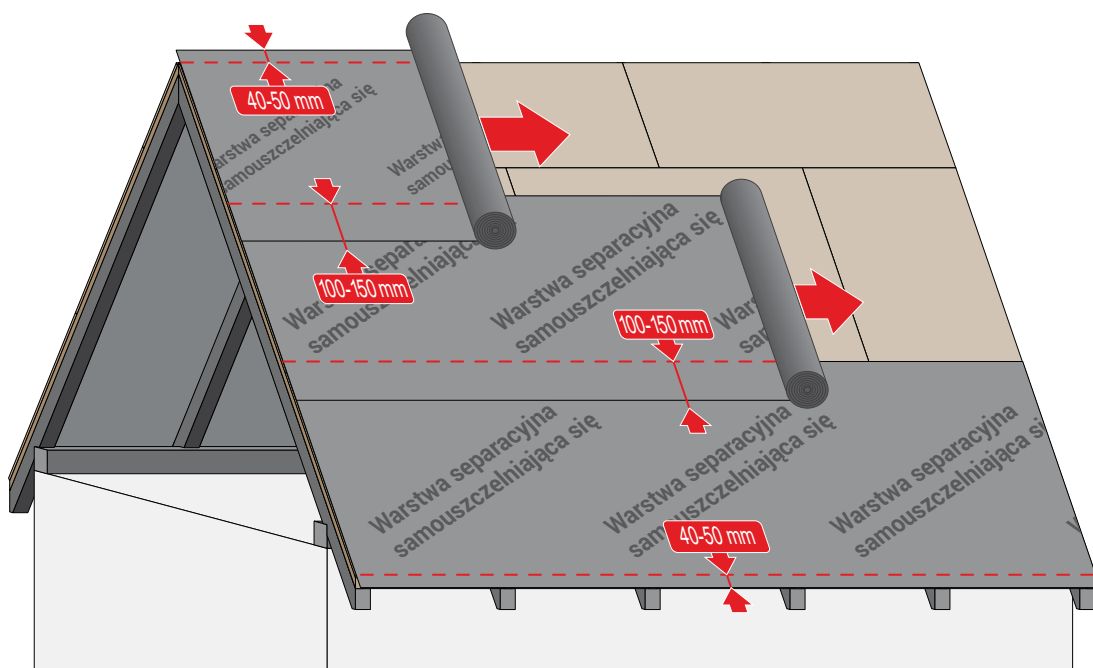
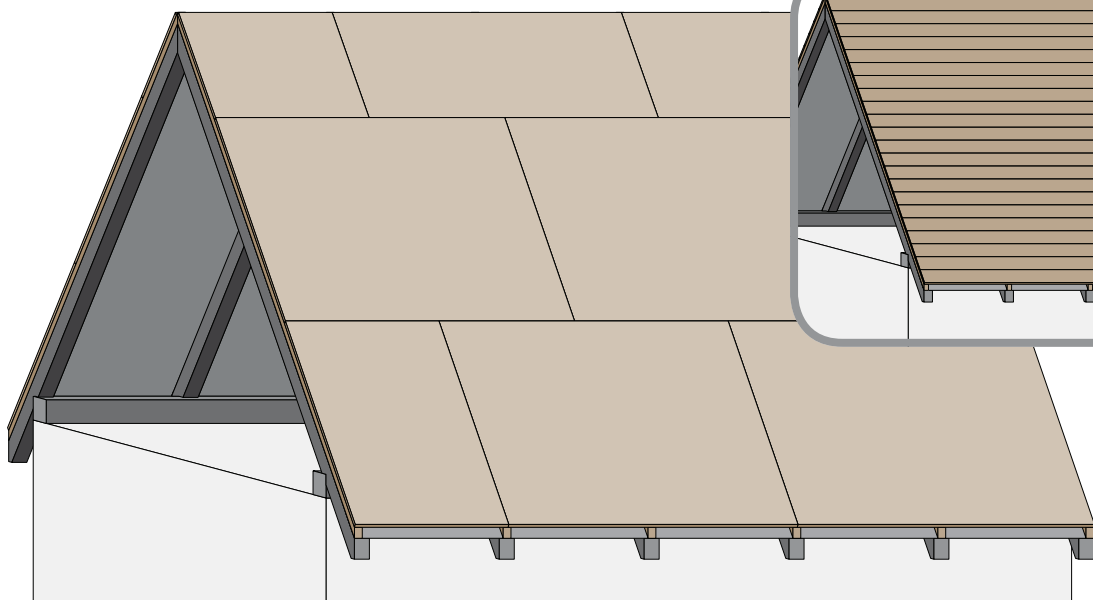


3b


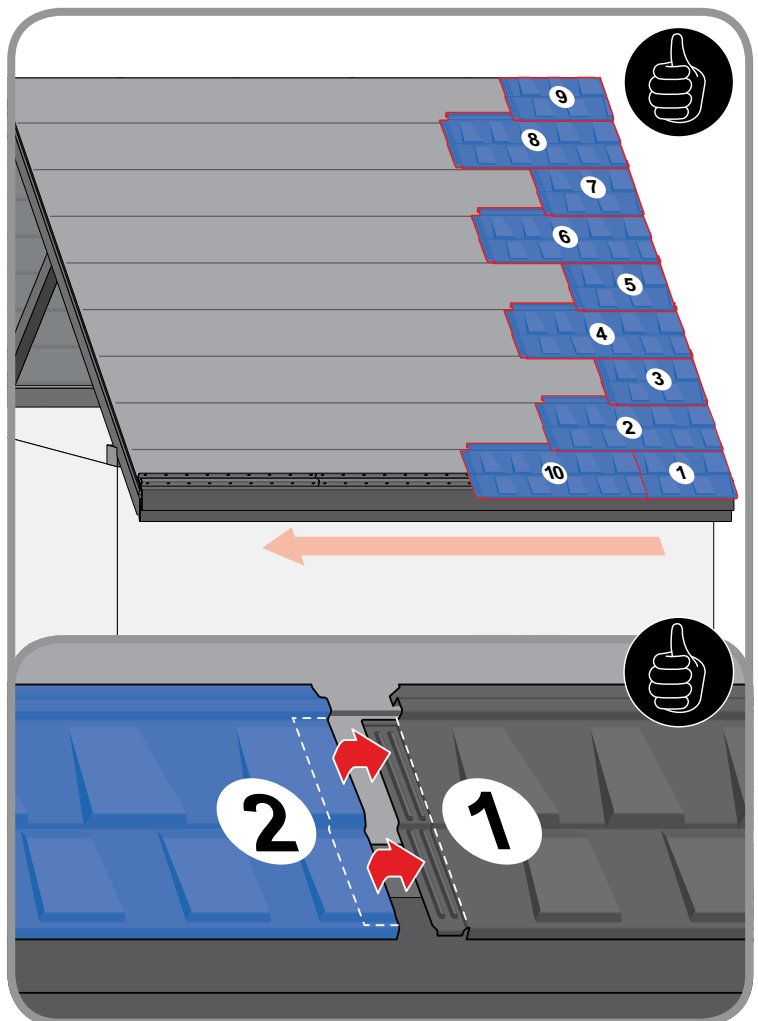
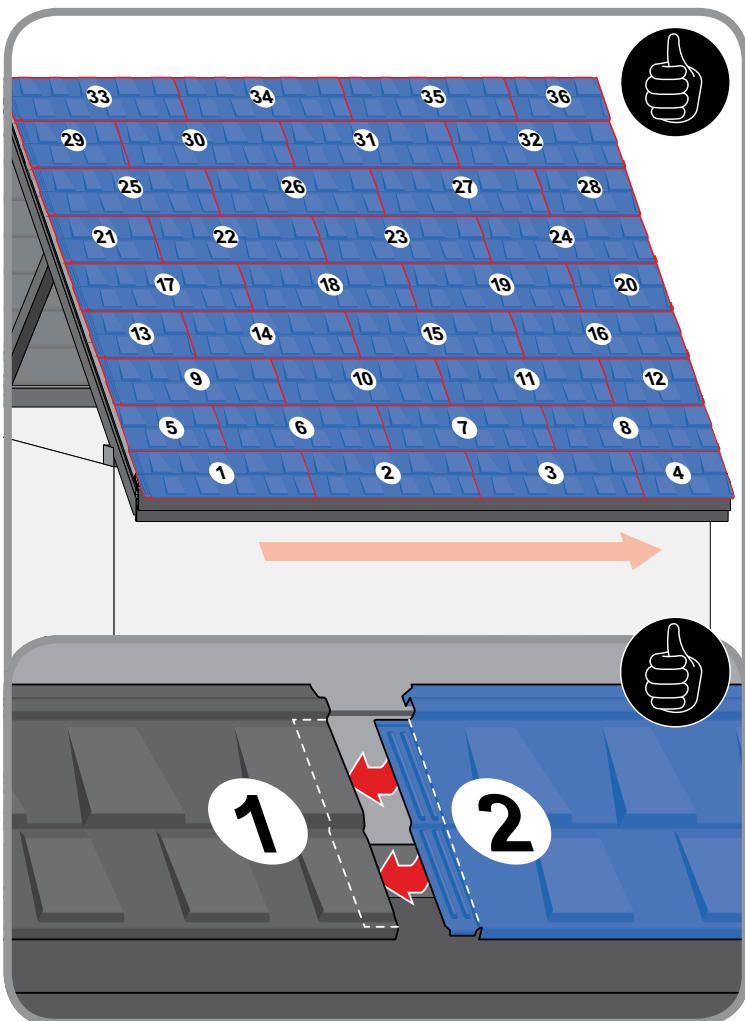
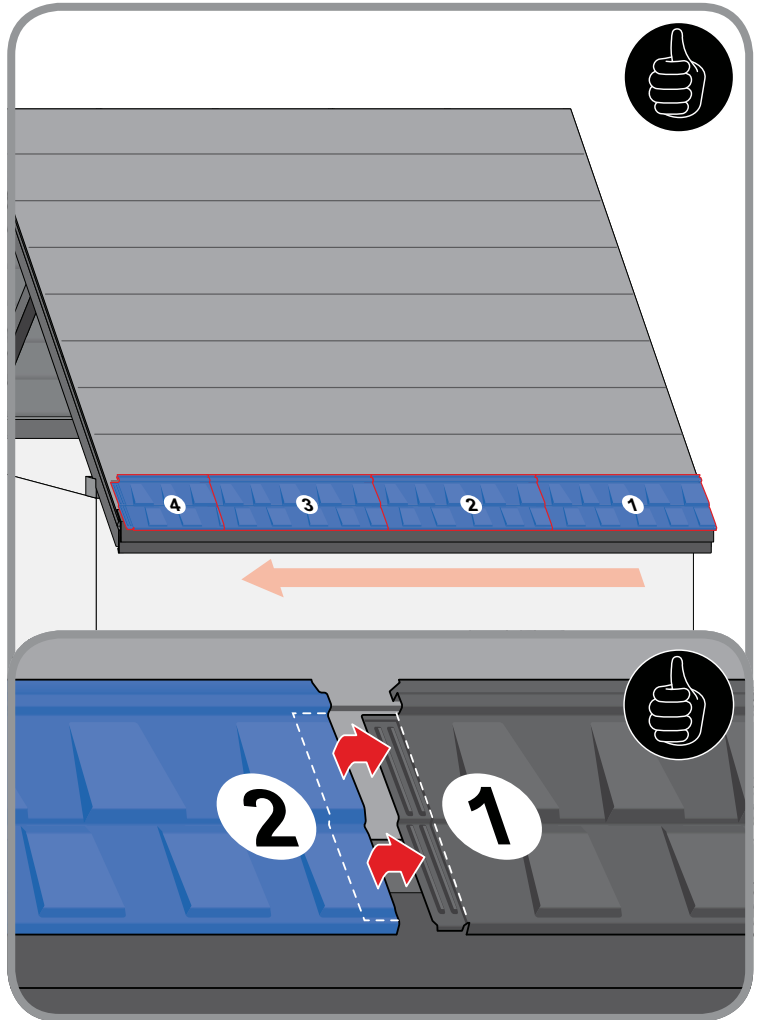
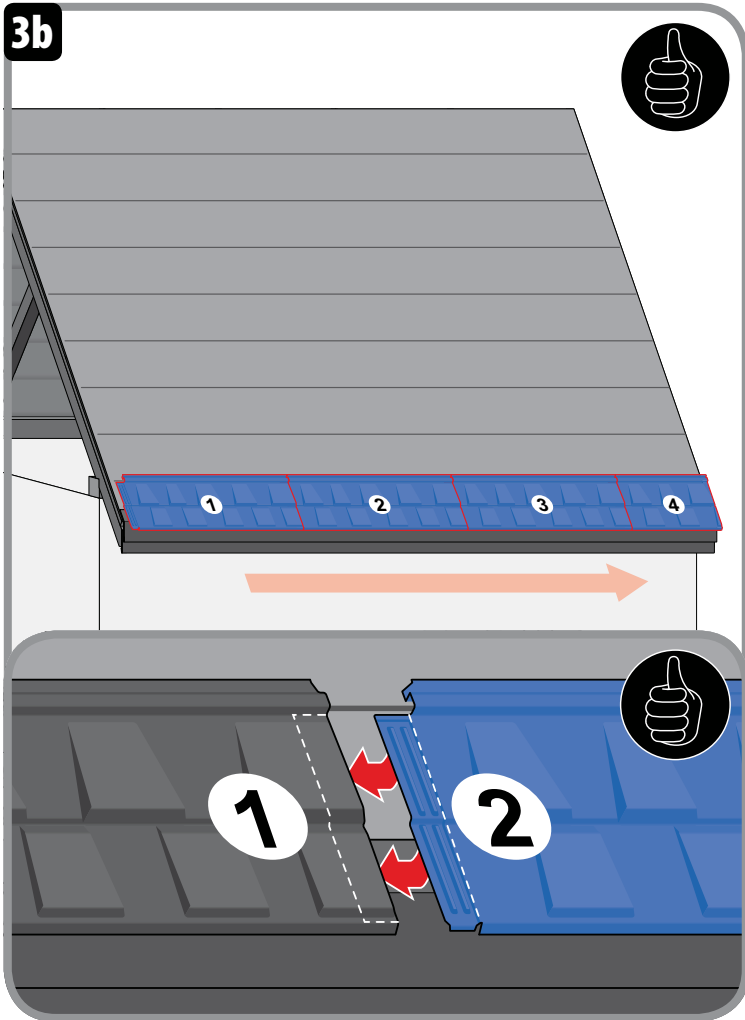


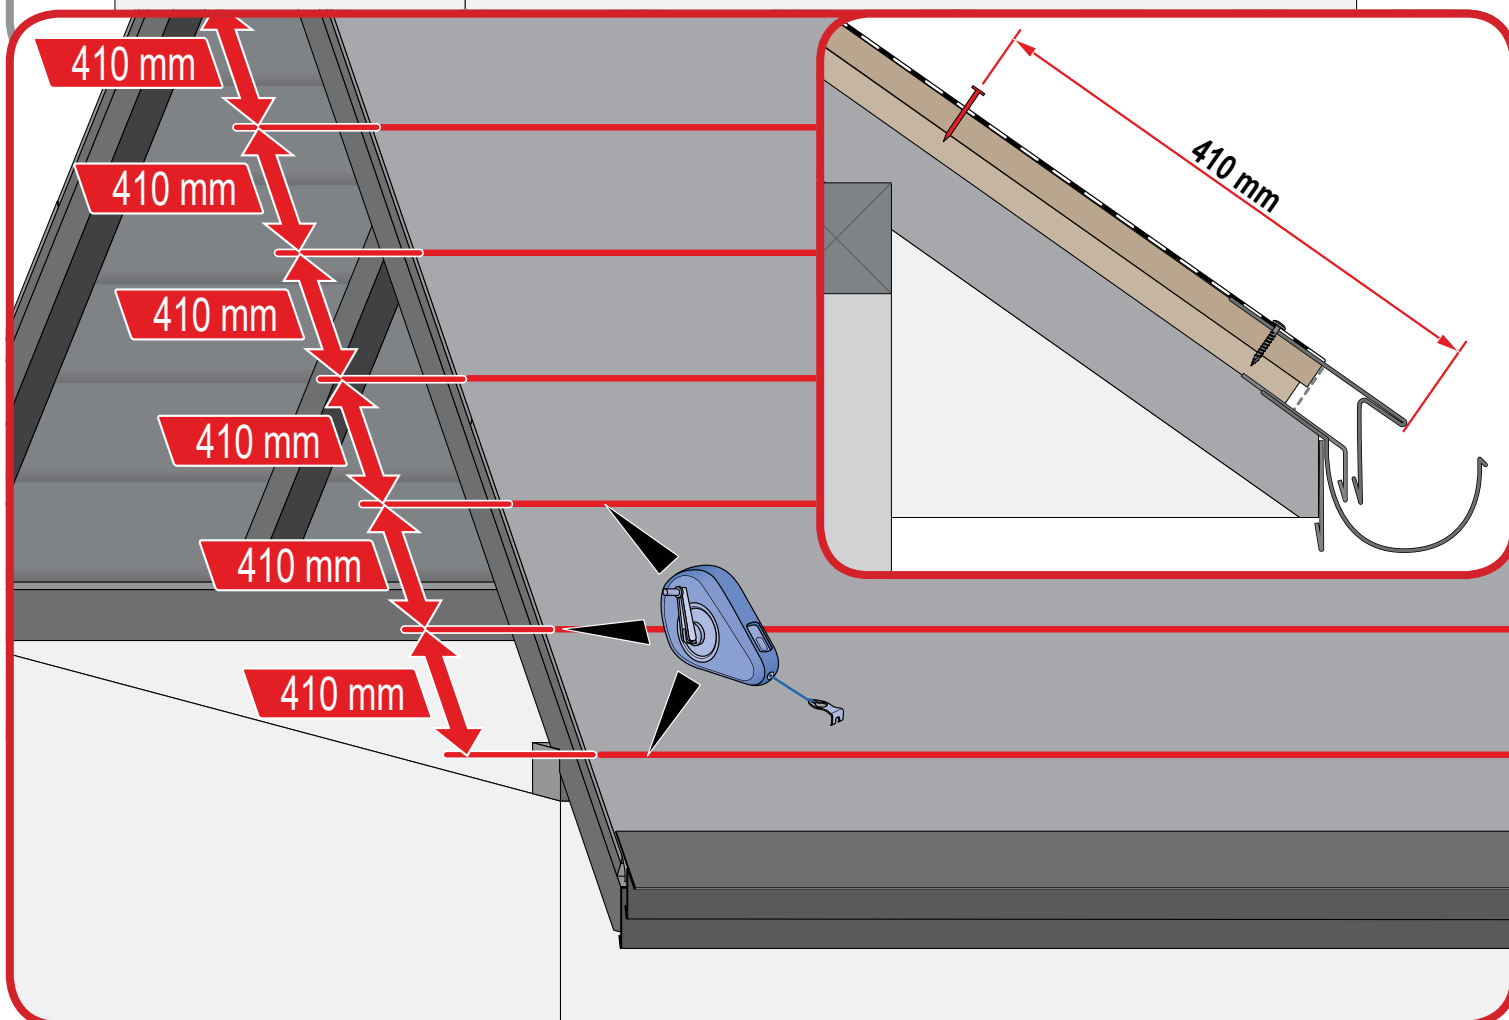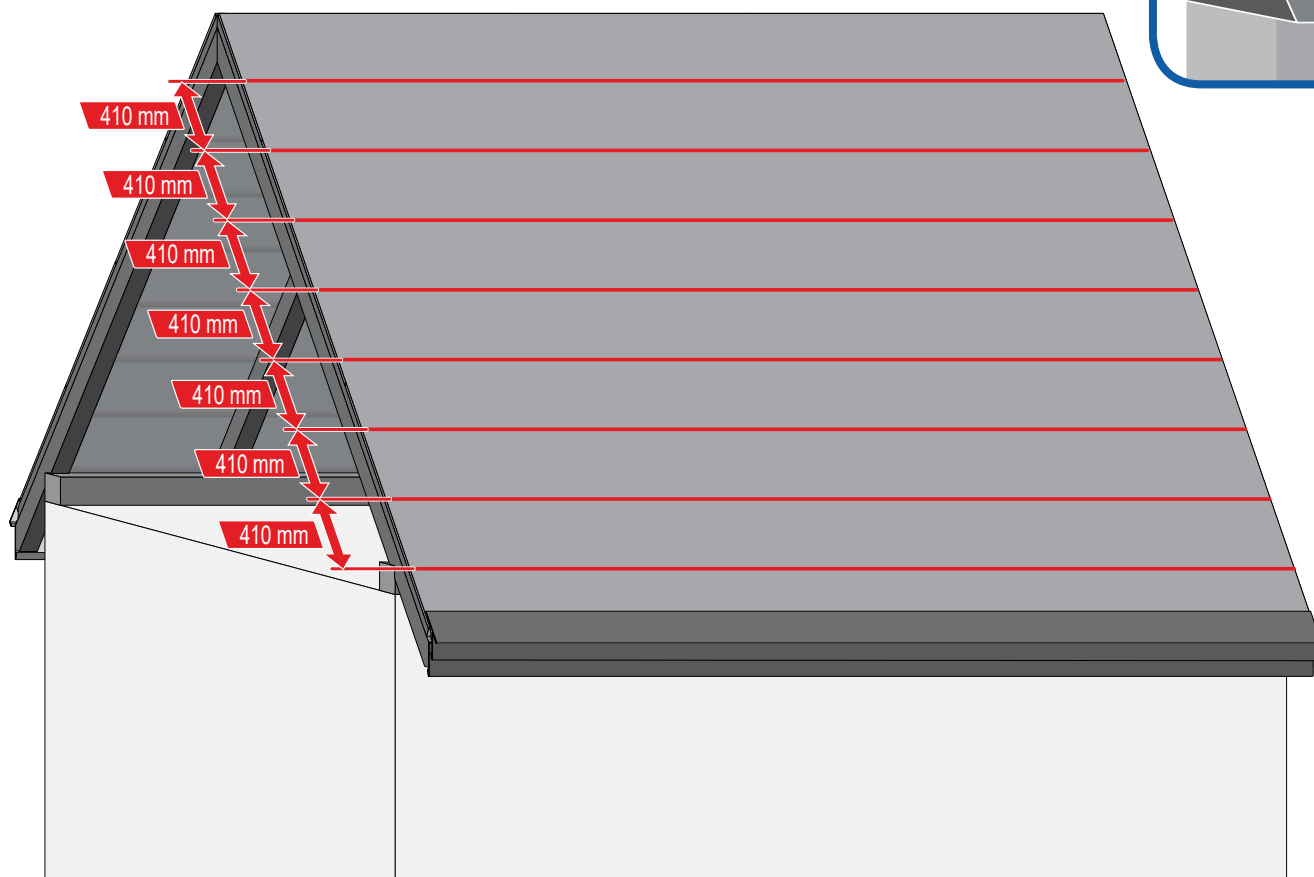






5a

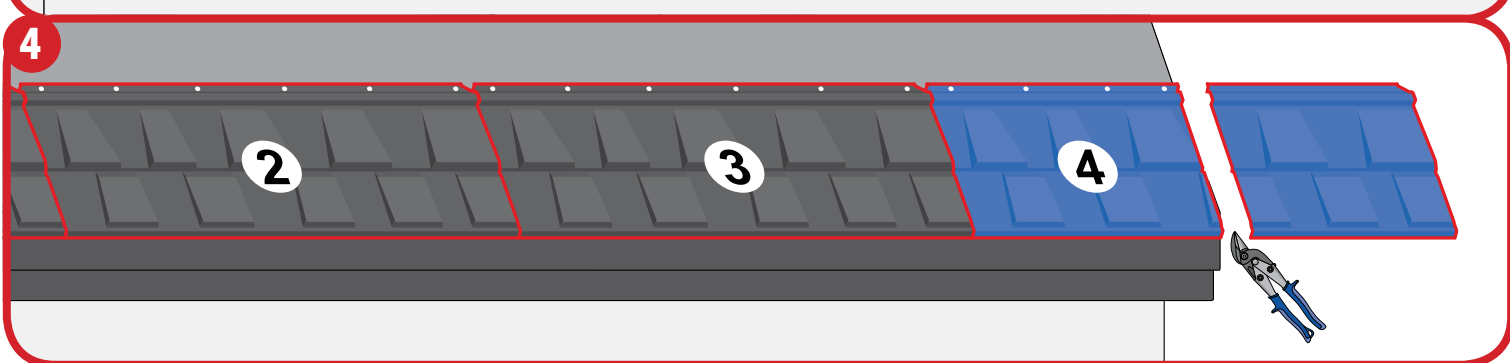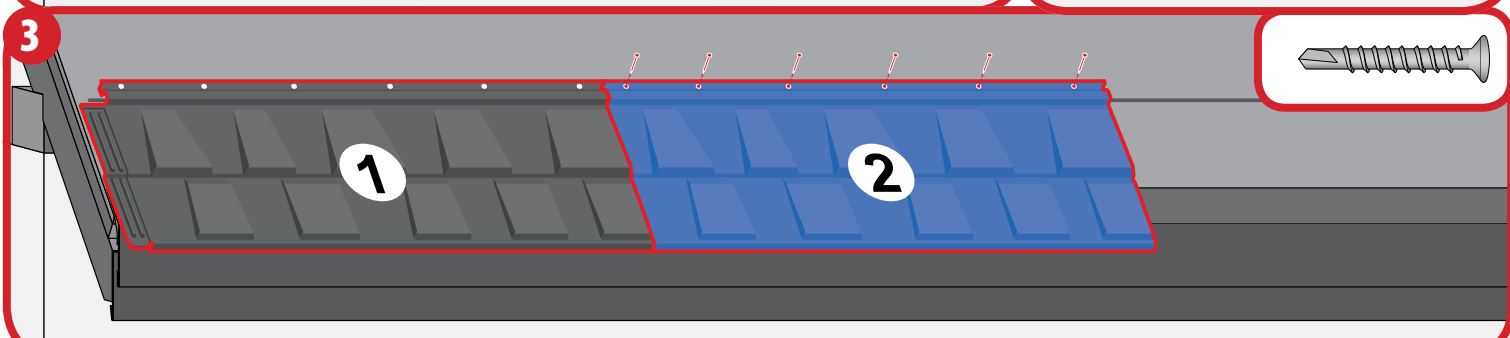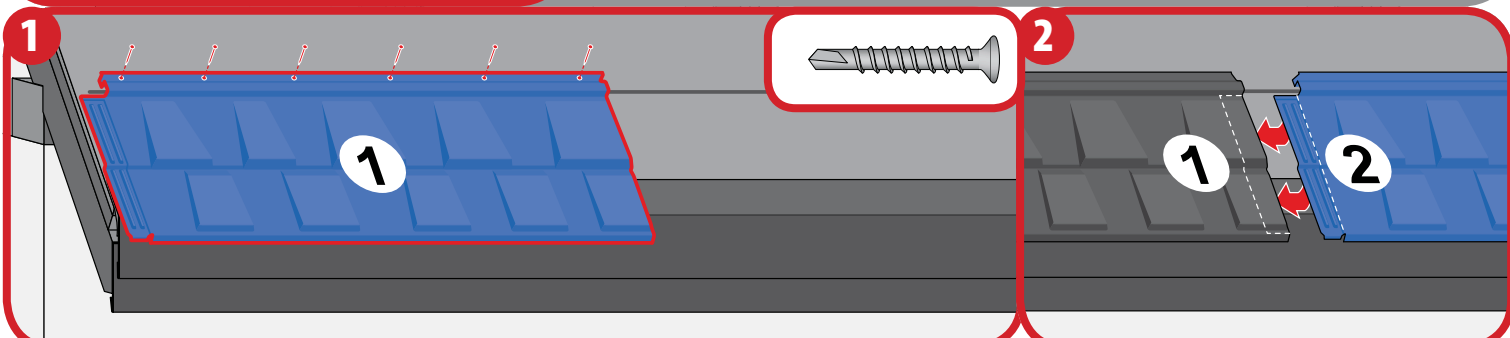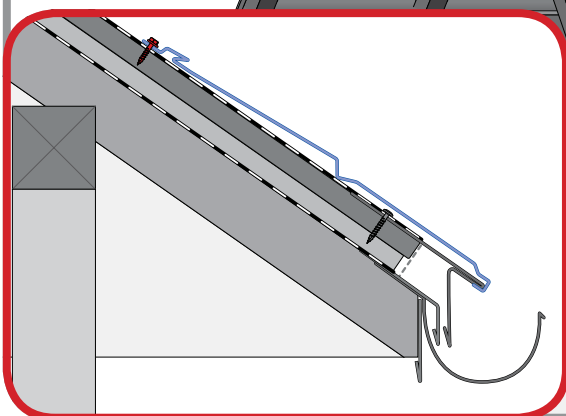


5b

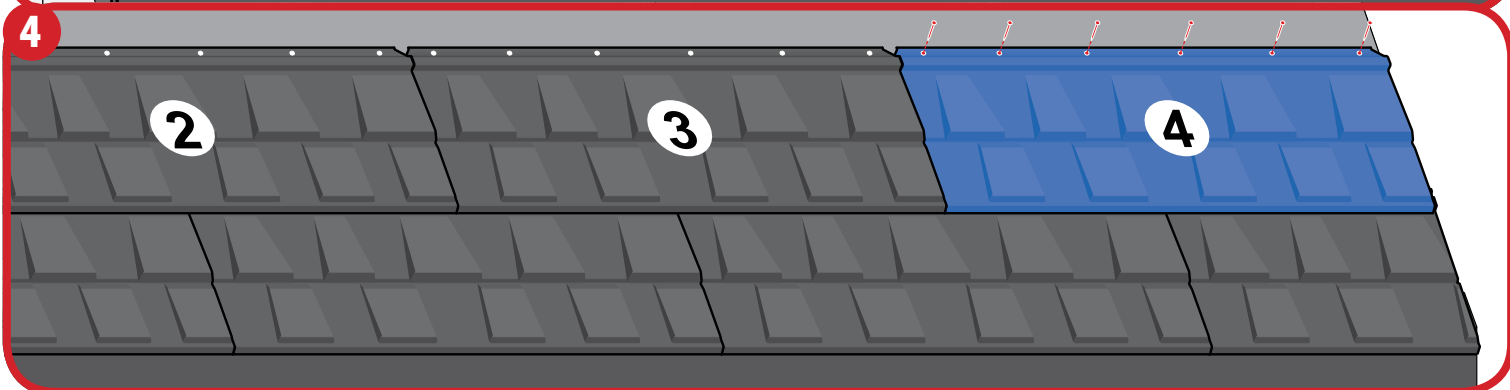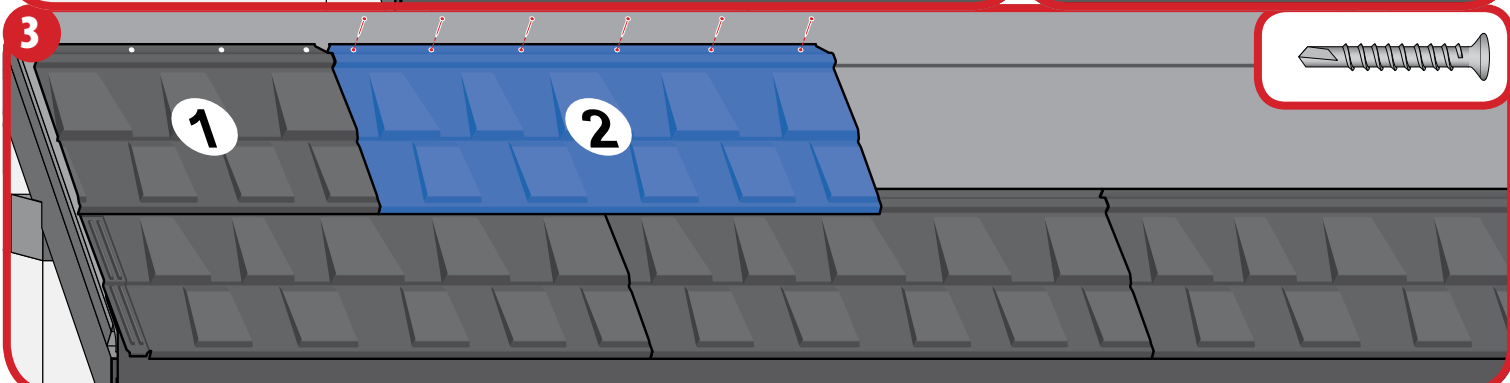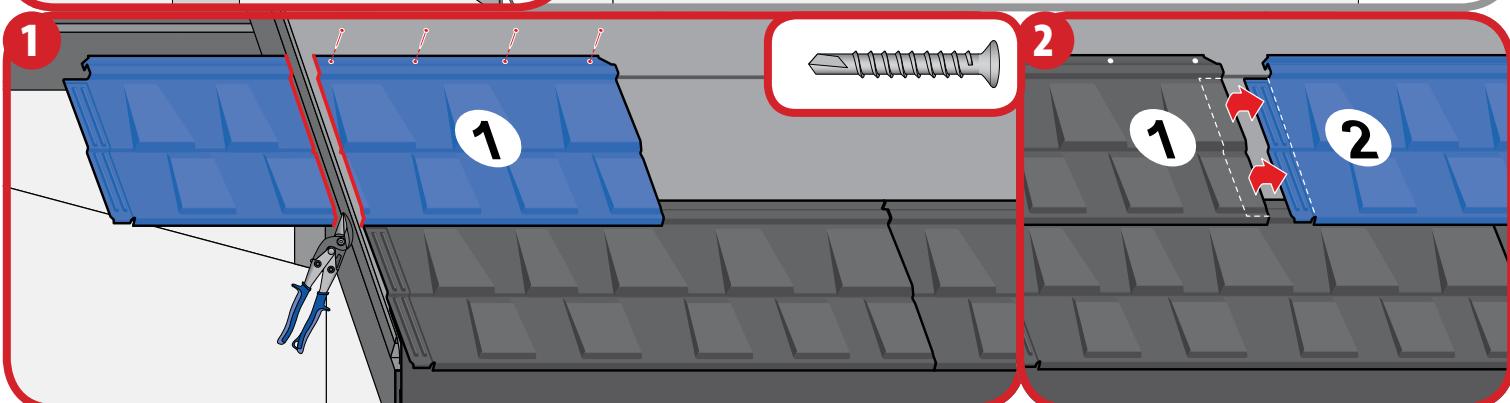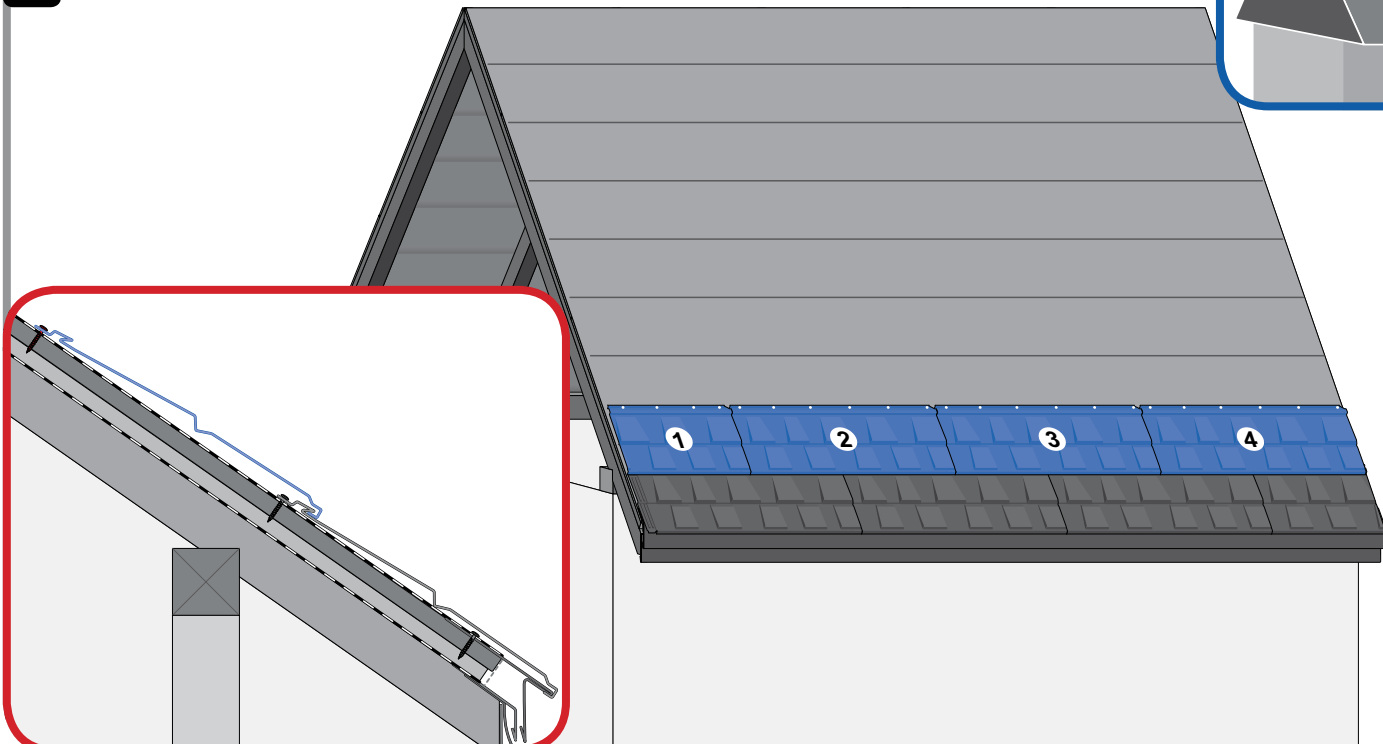


5c

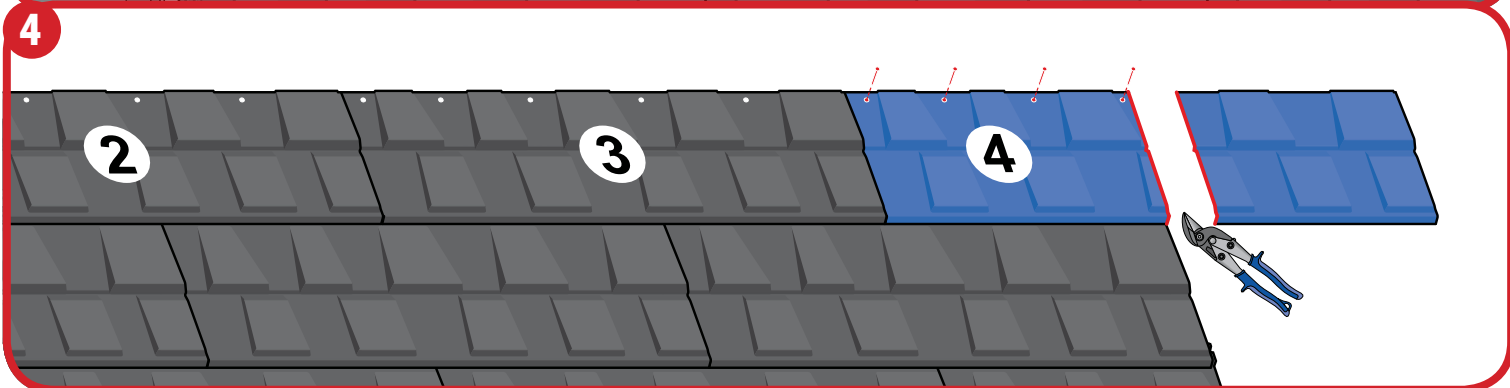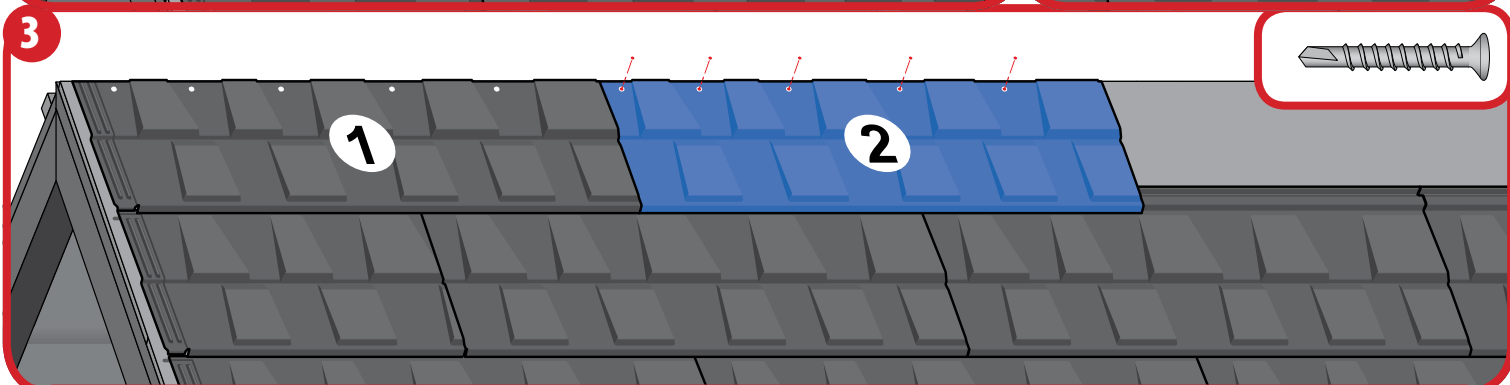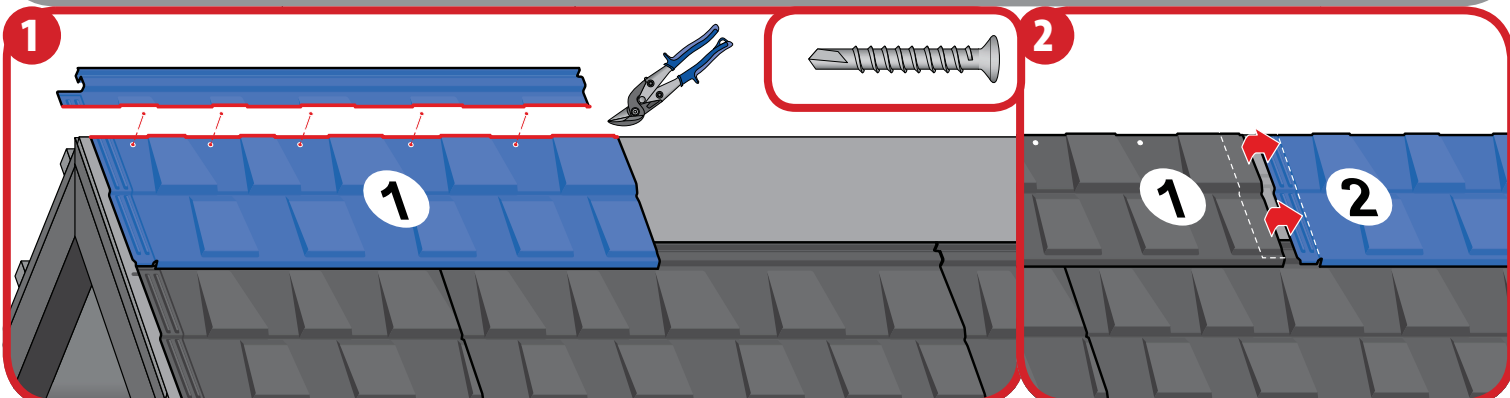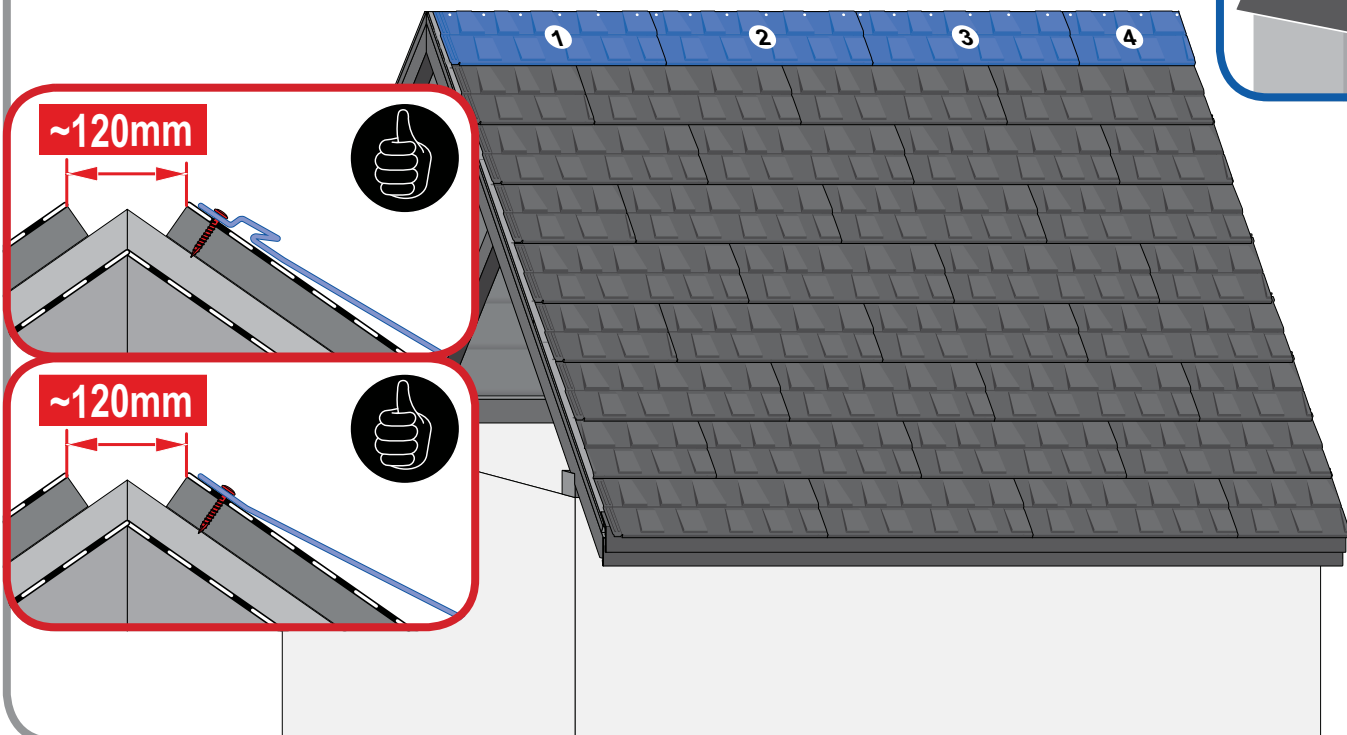


6a

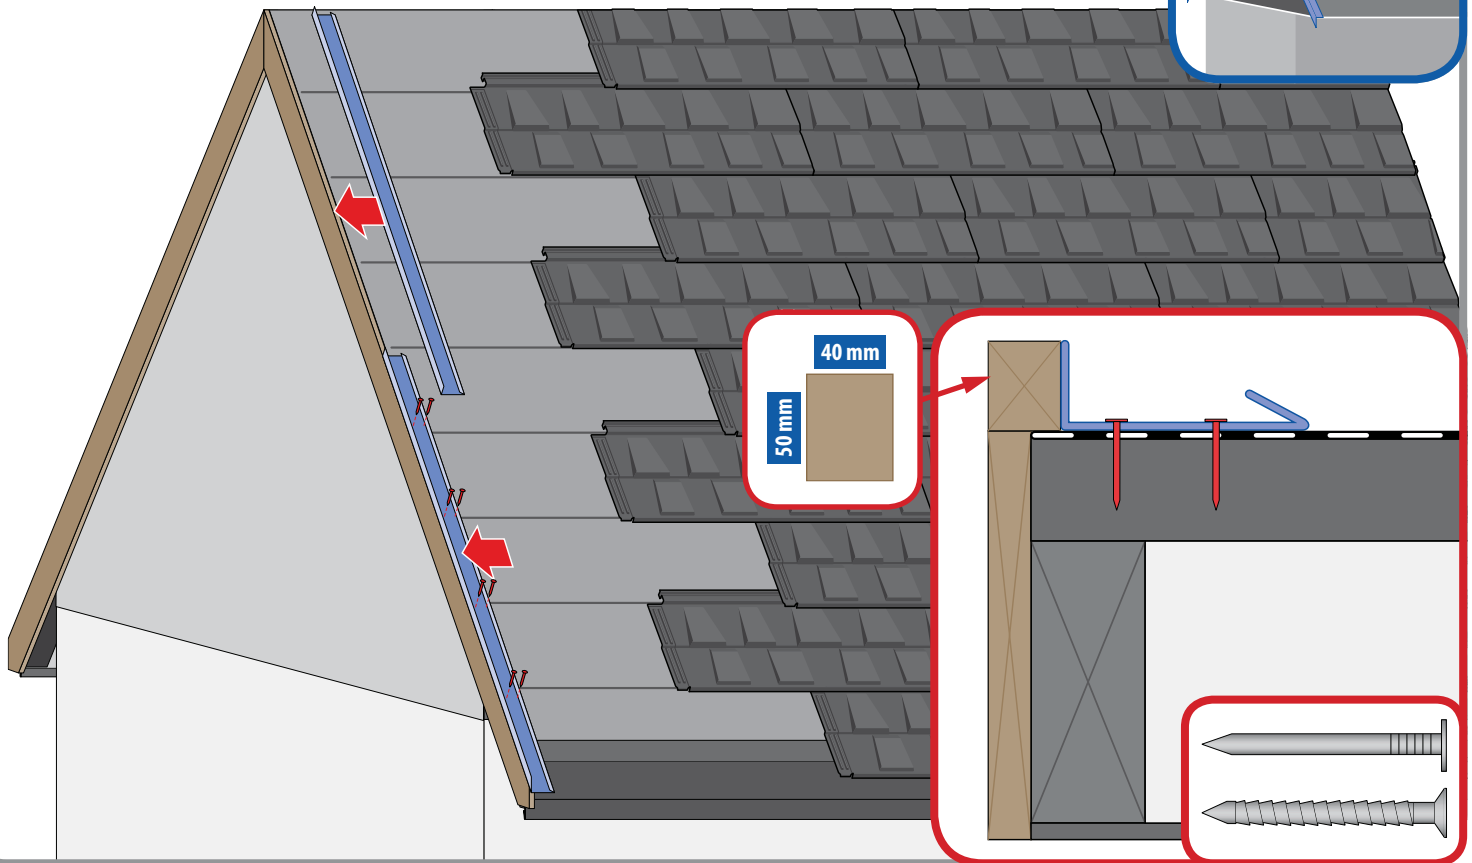


6b

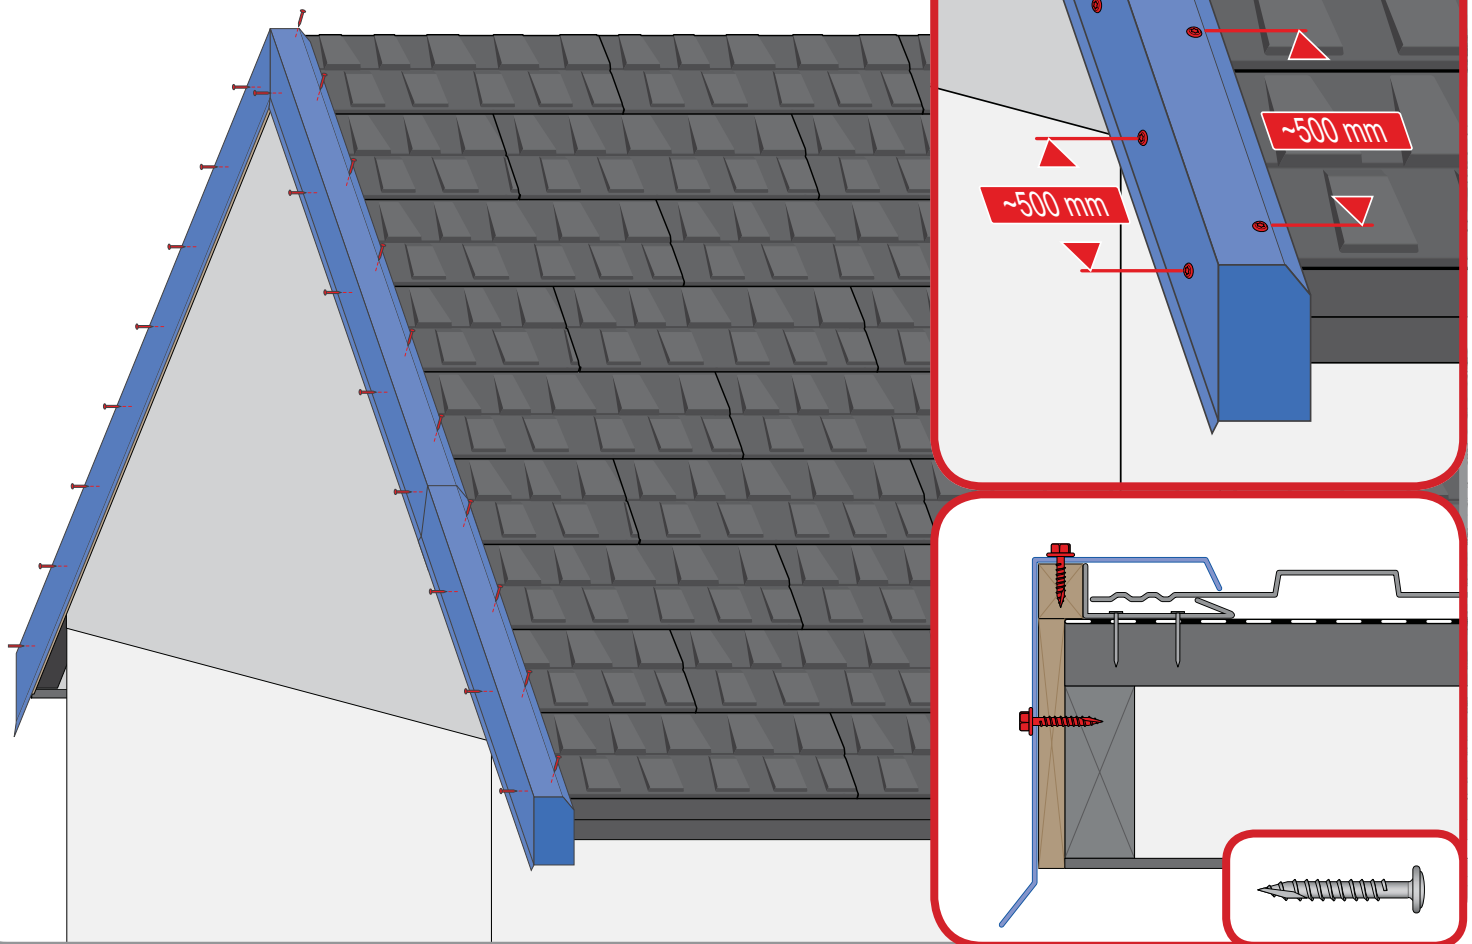



7a

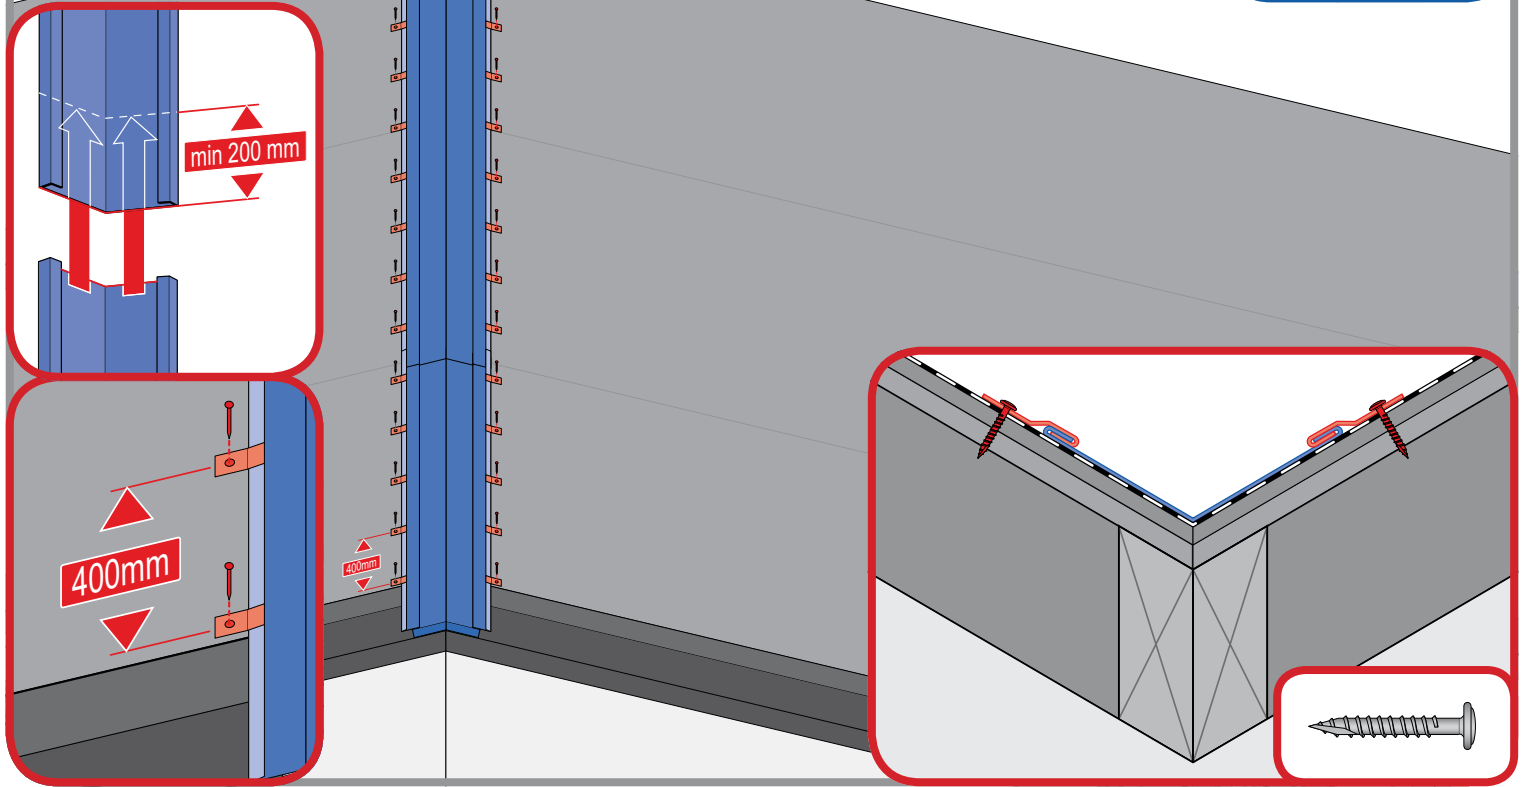



7b

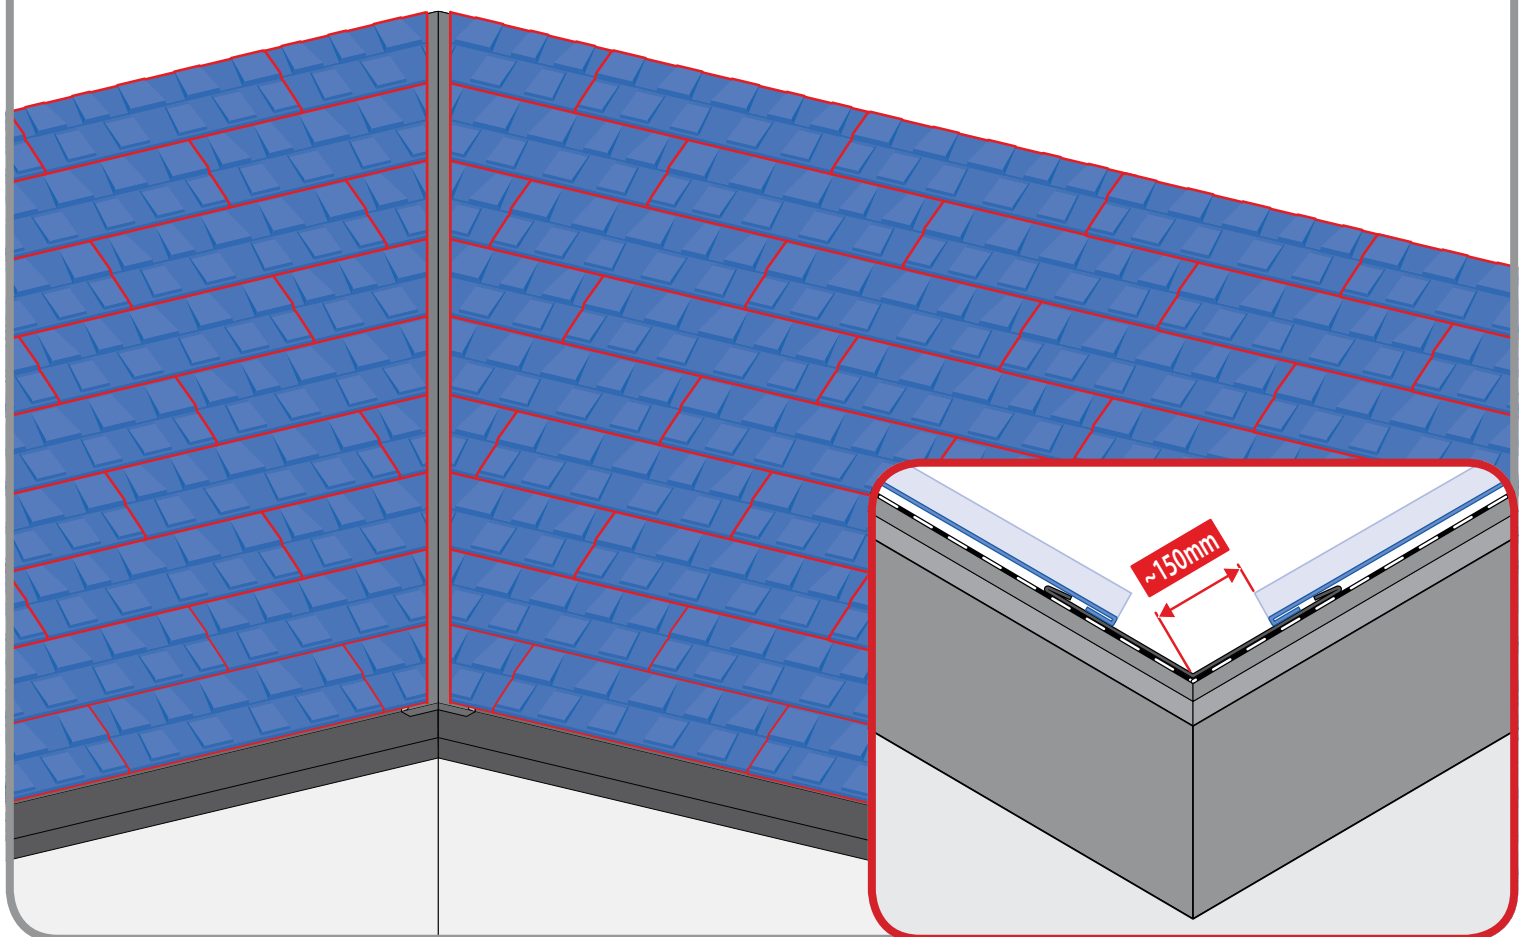


8a




8b




9a

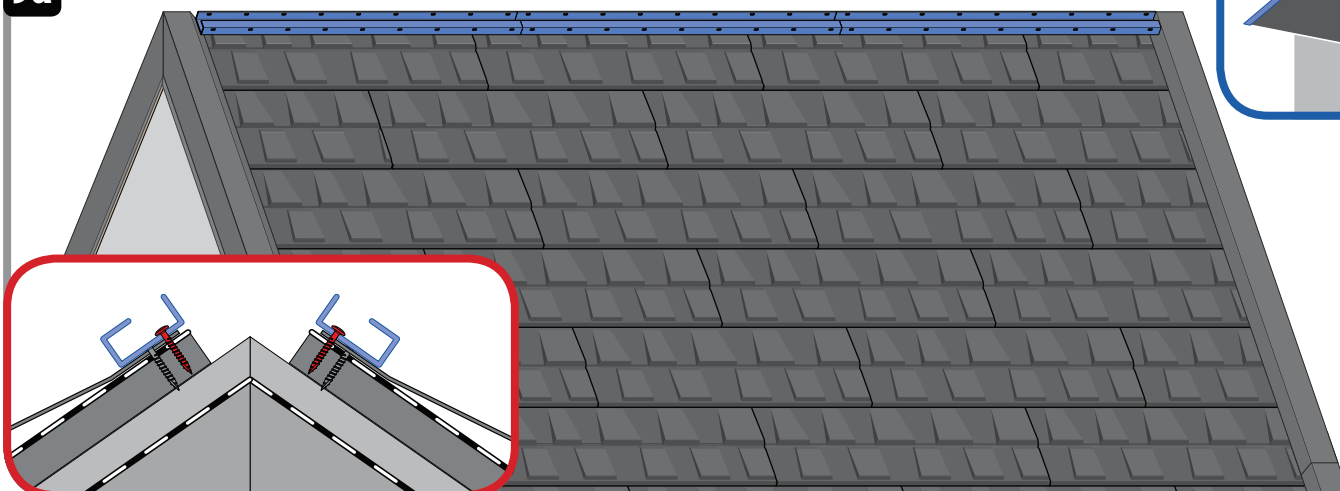


9b

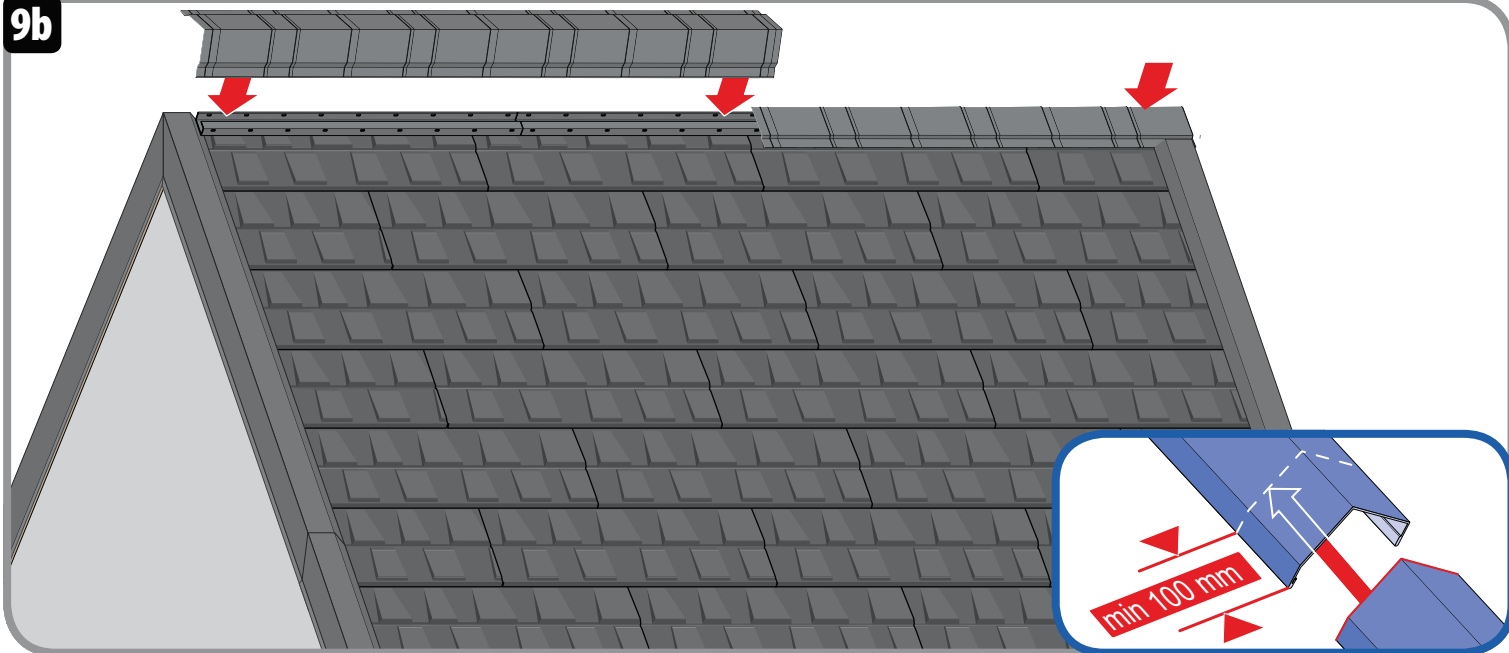


9c

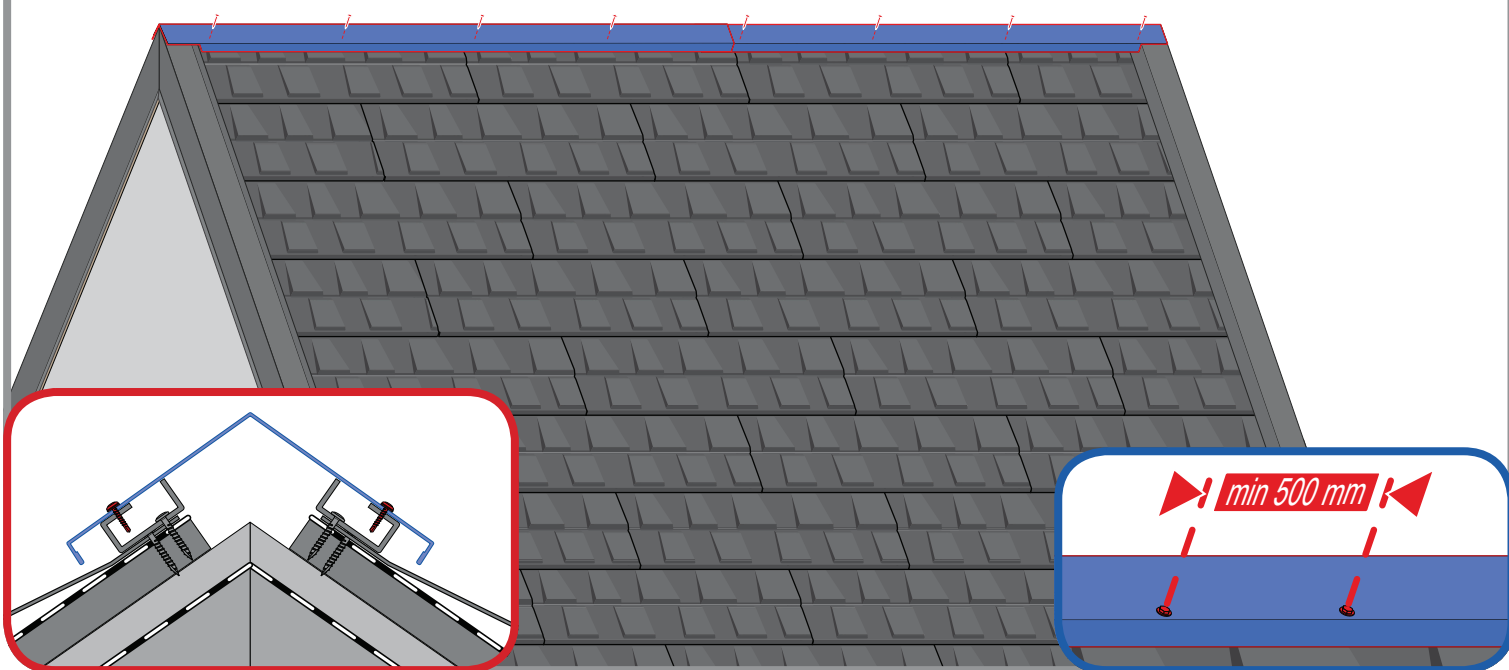


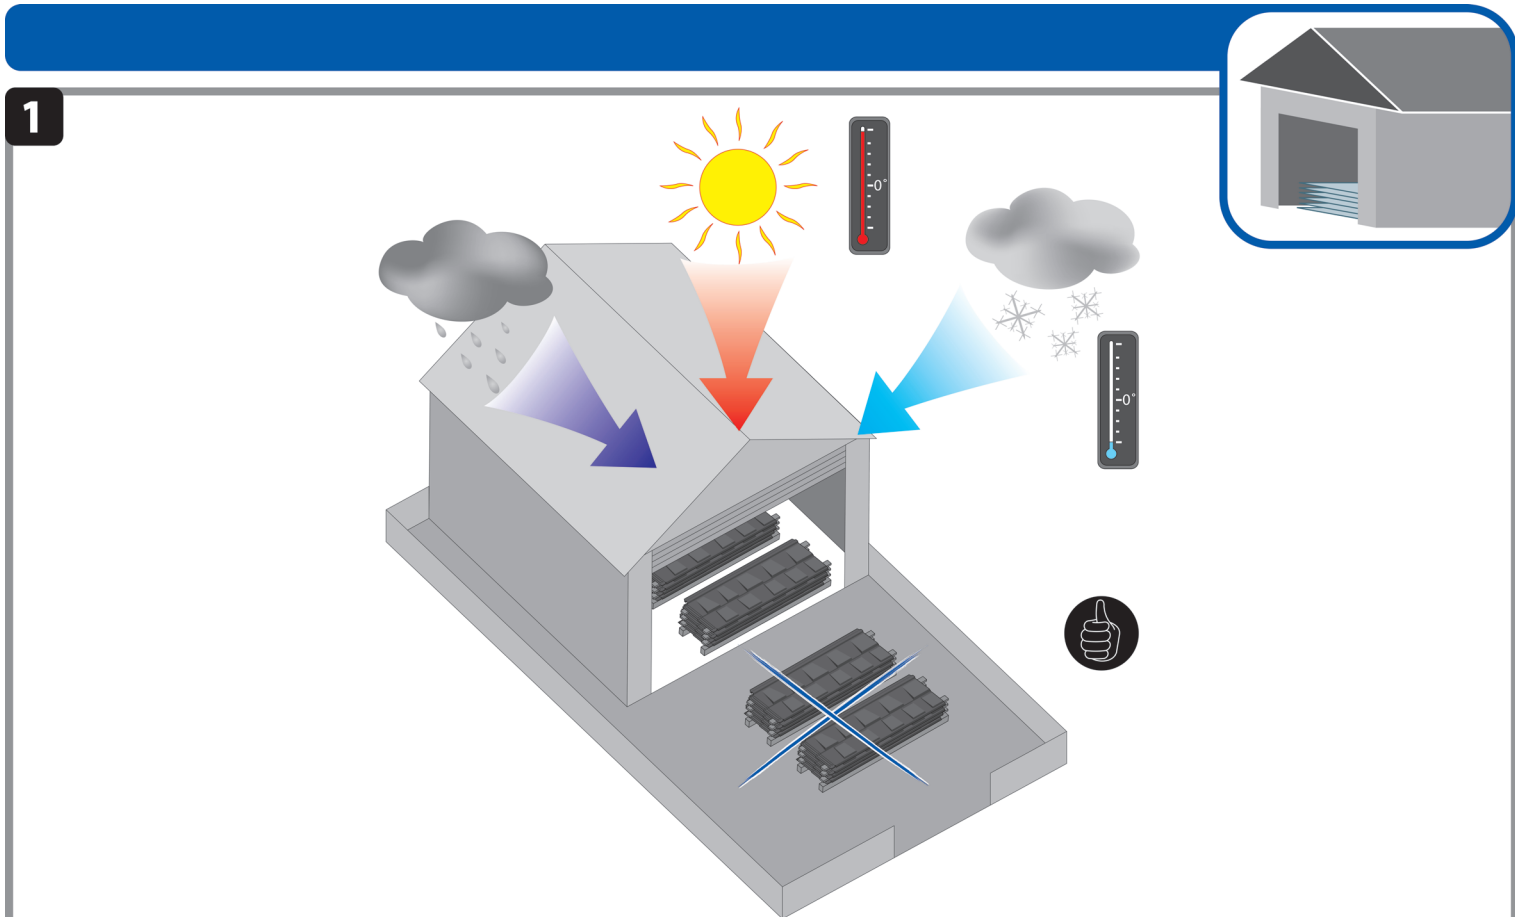

Składować materiał w pomieszczeniach suchych i przewiewnych. Chronić przed nagłymi zmianami temperatury i wilgoci

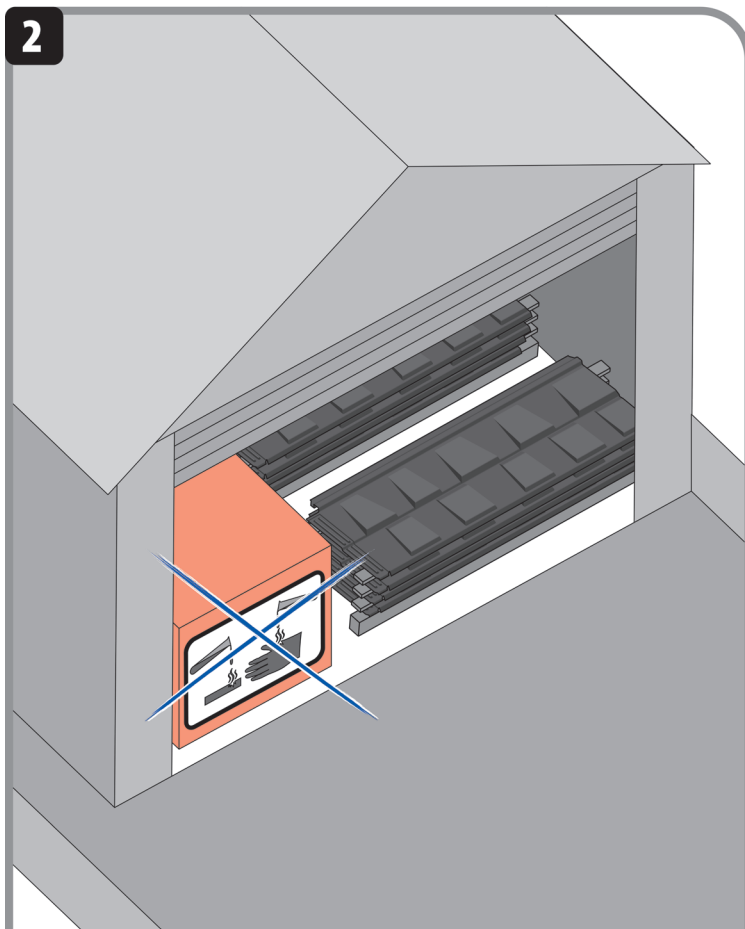

Nie składować w pobliżu materiałów agresywnie reagujących

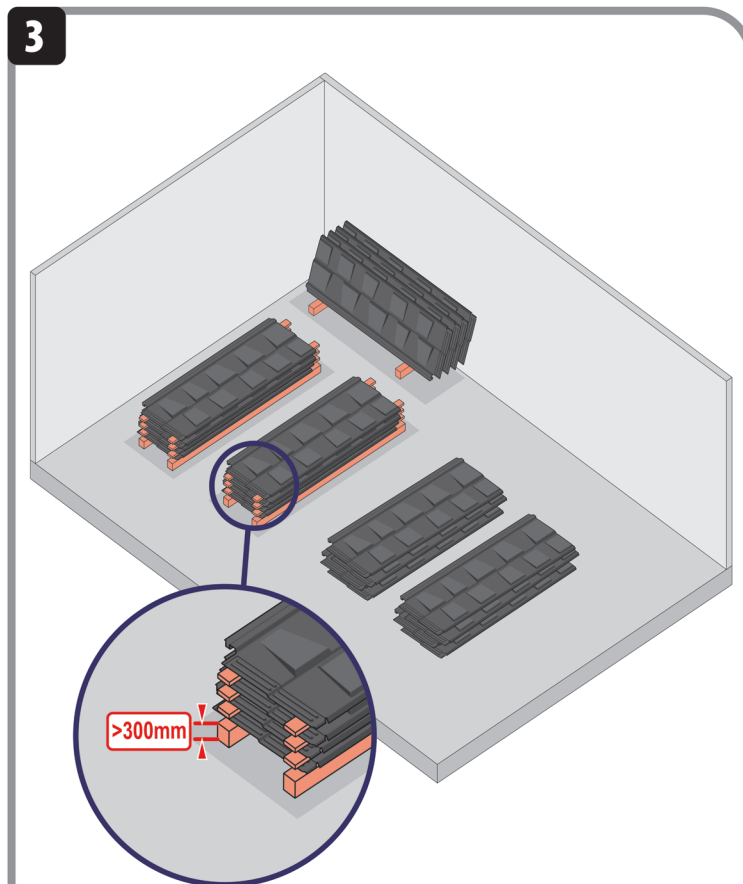

Oddzielić materiał od podłoża. Przełożyć każdy arkusz przekładkami albo ustawić stojąco np. pod ścianą.

Blank lined paper for writing.



GRUPA  BLACHOTRAPEZ

1125

The rock aggregate profiles are packaged in sets secured with cardboard and PP strapping. The appropriate number of packages is placed on a pallet and then secured with stretch film and a membrane. Wooden pallets and other packaging elements protect goods during transport. The packaging method may vary depending on the country of distribution due to the specifics of the local market.

Before installation, carefully read the Data Sheet of the relevant Product, these Instructions and follow the installation procedures and the guidelines of the Occupational Safety and Health Administration (OSHA).

It is recommended that personal protective measures be taken when moving and carrying out work on the roof. These measures include, but are not limited to, fall protection equipment and personal protective equipment such as gloves, safety glasses, safety helmet and harness, etc. Avoid contact with sharp edges of sheet metal.

Sheet metal products are recyclable. Disposal should be made at a point of selective collection of waste at the end of the product's life cycle.

The installation of roofing sheets requires professional knowledge, specialist knowledge and experience. This manual is an illustrative material and does not release participants in the construction process and contractors from the obligation to comply with the principles of technical knowledge. The installation methods presented in this manual are general guidelines. The required installation method may differ from the one indicated in the manual depending on the type of roof or regional solutions. To use the general installation instructions and tips, follow the designer's guidelines or contact our technical support department. Experienced contractors have individual solutions that BLACHOTRAPEZ accepts.